


DR2020 SERVODRIVE

Decentralized IP67 Protection Rate for harsh environment applications

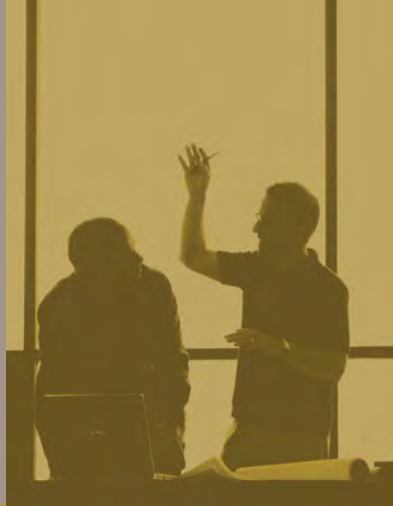

The DR2020 is a drive suitable for applications with electronics distributed on the machine. Its elevated protection grade allows it to operate in harsh environments with exposure to liquids and dust.

Thanks to the IP67 protection grade, the DR2020 does not require an electrical cabinet to be installed, but can be positioned directly on the machinery with a consequent streamlining of wire configurations and space savings in the control cabinets.

This also thanks to the use of a single connector for power and signal. The DR2020 is designed to work with different types of motors and feedback devices: it can control both synchronous and asynchronous motors and is compatible with various feedback systems (standard Resolver, single and multi-turn Heidenhain encoders).

Both the Safe Torque Off and Safe Brake Control safety functions are integrated in the standard equipment of each DR2020 servodrive.

FEATURES AND BENEFITS

- Possibility to remotely equip sections of the machine reducing connections
- Decreasing unit dimensions and number of components needed
- Use of a single AC / DC power supply for the entire system
- Significant lowering of costs due to reduced wiring
- Possibility to control additional axes (optional) from "base" machines
- Integration with the DM2020 multi-axis system allows for a reduction in the energy consumption of the machine.



APPLICATIONS

- Rough environment industrial applications
- Industrial machinery with decentralized architecture

SPECIFICATIONS

The integration with the DM2020 multi-axis system and the configuration with a shared DC bus allow a reduction in the overall energy consumption of the machine.

The employment in coupling with the new FAS H single connector motors, also allows the use of a single cable between the drive and the motor, even with analog transducers (resolver). The DR2020 can be controlled by a "master" controller EtherCAT, CANopen.

The Safe Torque Off (STO) and Safe Brake Control safety functions are integrated in the standard equipment of every DR2020.

TECHNICAL DATA

Control functions	Torque, speed, position
Protection rating	IP 67
Command protocols	EtherCAT, CANopen (according to CIA 402)
PWM frequency	4-8-16 kHz
Power supply range	282 - 810 Vdc
Environmental operating temperature	From 0°C to 40°C
Auxiliary power supply tension	24 Vdc
Rated current	2 - 12 Arms
Peak current	4 - 22 Arms
Machine safety	STO (Safe Torque Off) SILCL 3 PL e SBC (Safe Brake Control) SILCL 3 PL e (**)
Motor overheating protection	HW and SW
Analog input	Option (*)
Analog output	Option (*)
Digital input	Option (*)
Digital output	Option (*)
Encoder and analog command simulation	Option (*)
Set-up communication interface	EtherCAT, CAN
Certification	CE, UL (**)

* All options must be defined at the order ** Pending approval

Moog has offices around the world. For more information or the office nearest you, contact us online.

E-mail: drives-support@moog.com

Moog is a registered trademark of Moog Inc. and its subsidiaries. All trademarks as indicated herein are the property of Moog Inc. and its subsidiaries.
©2019 Moog Inc. All rights reserved. All changes are reserved.

DR2020 Servodrive
L-LFR2-E-191

For product information, visit

www.moog.com/industrial

For service information, visit

www.moogglobalsupport.com

This technical data is based on current available information and is subject to change at any time. Specifications for specific systems or applications may vary.