

TYPICAL APPLICATIONS

- Medical equipment - pumps, blowers and electric scooters and wheelchairs
- Automatic door and window openers
- Computer-controlled embroidery machines
- Scanners
- Packaging equipment and printing products
- HVAC equipment (air handling)
- Robotic tape storage and retrieval
- Semiconductor handling and insertion machines
- Actuators

FEATURES

- Inside rotor construction for quick acceleration
- 8 pole motor standard, 4 pole motors optional for high speed applications
- Compact size – lengths from 1.3 to 5.5 inches
- Diameter – 1.2 to 4.15 inches
- Continuous torques from 2.4 to 519 oz-in
- High energy neodymium magnets
- Safe, arcless operation
- High speed capability – up to 20,000 rpm
- High torque per dollar ratio

BENEFITS

- Operation at any single speed - not limited to AC frequency
- Motor life is not limited to brush or commutator life
- An essentially linear speed / torque curve
- Efficient operation without losses associated with brushes and commutation or armature induction
- Precise, variable speed control
- Extremely quiet operation
- Long-life operation

ENCODERS

High resolution, high reliability, and state-of-the-art technology in a small package:

- Bidirectional incremental code
- Up to 1024 cycles standard
- Up to 3 channels: A, B, and index
- TTL / CMOS compatible
- Hewlett Packard HEDS-5500 encoder standard, other configurations and resolutions available

SILENCER BRUSHLESS MOTOR DRIVES

Optimized for use with Silencer Brushless DC motors, these drives provide:


- Multiple operating modes - commutation, velocity, torque, 2 and 4 quadrant
- Feedback using Hall effect sensor or encoder
- Efficient PWM speed control
- CE approved for European applications
- Low cost

Note: This catalog contains basic marketing information and general part descriptions of Moog. With respect to the U.S. export regulations, the products described herein are controlled by the U.S. Commerce Department or the U.S. State Department. Contact Moog for additional detail on the export controls that are applicable to your part.

Silencer® Series Brushless DC Motors

Commercial and Industrial

BN12, 17, 23, 28, 34 and 42

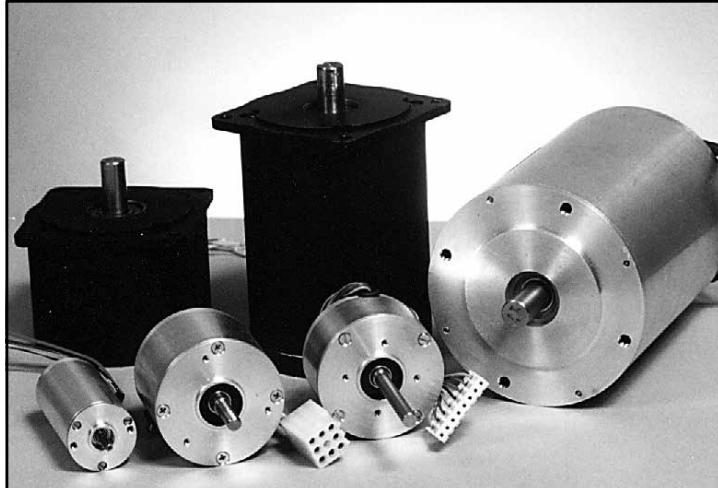

Quiet, Brushless Motors

Silencer® Brushless motors provide smooth, efficient operation and increased speed ranges. Utilizing bonded neo magnets, our BN series motors provide excellent value with their low cost and high torque. Each frame of the BN motors is available in four different lengths with a variety of electrical options to meet a wide range of commercial and industrial operating specifications.


Reliable, Low-Cost Operation

The compact BN motors are well-suited for applications demanding low audible noise and long life. An aluminum housing protects the unit in rugged applications and environments. Typical options include electronic drives, encoders and gearheads, as well as Hall effect, resolver and sensorless feedback.

Our engineering department is available for consultation to help you tailor a brushless motor for your specific application.

SPECIFICATION AND NUMBERING SYSTEM


Part Numbering System Guide

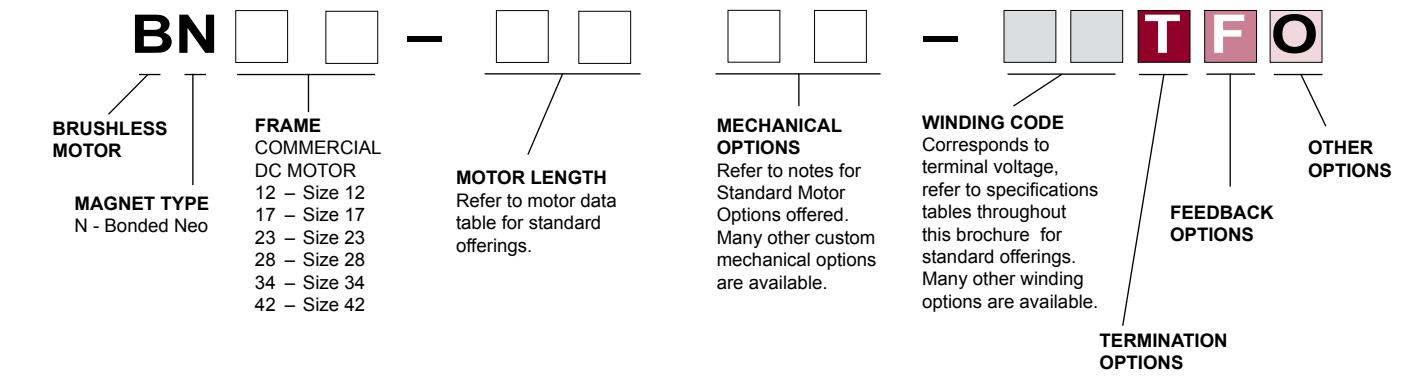


Conversion Table

| FROM | TO | MULTIPLY BY |
|--------------------------|--------------------|------------------------|
| Length | | |
| inches | cm | 2.540 |
| feet | cm | 30.48 |
| cm | inches | .3937 |
| cm | feet | 3.281×10^{-2} |
| Mass | | |
| oz | g | 28.35 |
| lb | g | 453.6 |
| g | oz | 3.527×10^{-2} |
| lb | oz | 16.0 |
| g | lb | 2.205×10^{-3} |
| oz | lb | 6.250×10^{-2} |
| Torque | | |
| oz-in | Nm | 141.61^{-1} |
| oz-in | g-cm | 72.01 |
| lb-ft | g-cm | 1.383×10^4 |
| g-cm | oz-in | 1.389×10^{-2} |
| lb-ft | oz-in | 192.0 |
| g-cm | lb-ft | 7.233×10^{-5} |
| oz-in | lb-ft | 5.208×10^{-3} |
| Rotation | | |
| rpm | degrees/sec | 6.0 |
| rad/sec | degrees/sec | 57.30 |
| degrees/sec | rpm | .1667 |
| rad/sec | rpm | 9.549 |
| degrees/sec | rad/sec | 1.745×10^{-2} |
| rpm | rad/sec | .1047 |
| Moment Of Inertia | | |
| oz-in ² | g-cm ² | 182.9 |
| lb-ft ² | g-cm ² | 4.214×10^5 |
| g-cm ² | oz-in ² | 5.467×10^{-3} |
| lb-ft ² | oz-in ² | 2.304×10^3 |
| g-cm ² | lb-ft ² | 2.373×10^{-6} |
| oz-in ² | lb-ft ² | 4.340×10^{-4} |
| oz-in-sec ² | g-cm ² | 7.062×10^4 |

Timing Diagram for Hall Switches

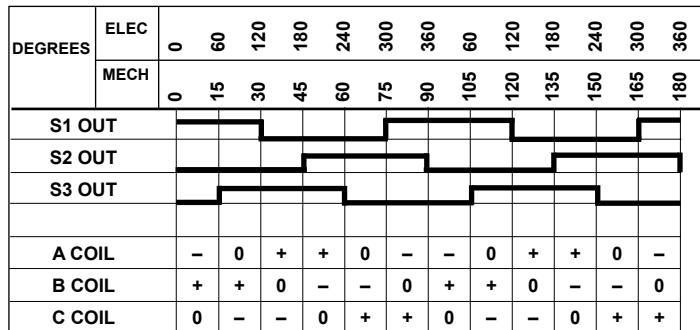

Hall Effect Switches

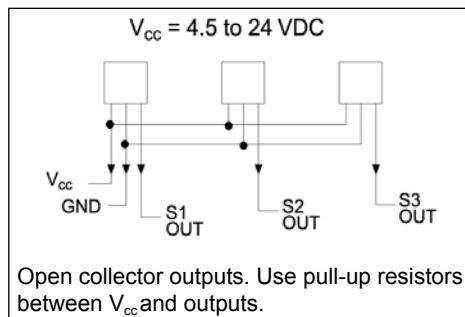

IMPORTANT

The operational life and performance of any motor is dependent upon individual operating parameters, environment, temperature and other factors. Your specific application results may vary. Please consult the factory to discuss your requirements.

Bearing Load Rating (lbs)

| Motor Size | Dynamic | Static |
|------------|---------|--------|
| BN-12 | 295 | 110 |
| BN-17 | 331 | 134 |
| BN-23 | 743 | 304 |
| BN-28 | 1022 | 422 |
| BN-34 | 1532 | 683 |
| BN-42 | 1340 | 725 |

BN12 Specifications

BN12 SPECIFICATIONS - *Continuous Stall Torque 2.4 - 8.6 oz-in (0.0170 - 0.0607 Nm)* *Peak Torque 13 - 77 oz-in (0.0918 - 0.5437 Nm)*

| Part Number* | BN12-13AF- | | | BN12-18AF- | | | BN12-23AF- | | | BN12-28AF- | | | |
|--------------------------|---|---------|---------|------------|---------|---------|------------|---------|---------|------------|---------|---------|---------|
| Winding Code** | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 | |
| L = Length | inches | 1.30 | | 1.80 | | 2.30 | | 2.80 | | 3.30 | | 71.12 | |
| | millimeters | 33.02 | | 45.72 | | 58.42 | | 71.12 | | 84.29 | | 180.58 | |
| Terminal Voltage | volts DC | 12.0 | 24.0 | 36.0 | 12.0 | 24.0 | 36.0 | 12.0 | 24.0 | 36.0 | 12.0 | 24.0 | 36.0 |
| Peak Torque | oz-in | 13.0 | 13.0 | 14.0 | 37.0 | 37.0 | 39.0 | 58.0 | 58.0 | 61.0 | 77.0 | 77.0 | 72.0 |
| | Nm | 0.0918 | 0.0918 | 0.0989 | 0.2613 | 0.2613 | 0.2754 | 0.4096 | 0.4096 | 0.4308 | 0.5437 | 0.5437 | 0.5084 |
| Continuous Stall Torque | oz-in | 2.4 | 2.4 | 2.4 | 4.9 | 5.0 | 5.0 | 6.9 | 6.9 | 6.9 | 8.3 | 8.6 | 8.6 |
| | Nm | 0.0169 | 0.0169 | 0.0169 | 0.0346 | 0.0353 | 0.0353 | 0.0487 | 0.0487 | 0.0487 | 0.0586 | 0.0607 | 0.0607 |
| Rated Speed | RPM | 13027.0 | 12736.0 | 13753.0 | 11928.0 | 11448.0 | 12320.0 | 10604.0 | 10601.0 | 11489.0 | 11036.0 | 10253.0 | 9529.0 |
| | rad/sec | 1364 | 1334 | 1440 | 1249 | 1199 | 1290 | 1110 | 1110 | 1203 | 1156 | 1074 | 998 |
| Rated Torque | oz-in | 1.8 | 1.8 | 1.8 | 3.5 | 3.6 | 3.5 | 5.0 | 5.0 | 4.7 | 5.4 | 5.9 | 6.2 |
| | Nm | 0.0127 | 0.0127 | 0.0127 | 0.0247 | 0.0254 | 0.0247 | 0.0353 | 0.0353 | 0.0332 | 0.0381 | 0.0417 | 0.0438 |
| Rated Current | Amps | 2.26 | 1.13 | 0.77 | 3.49 | 1.76 | 1.20 | 4.32 | 2.16 | 1.46 | 4.81 | 2.46 | 1.61 |
| Rated Power | watts | 17.3 | 17.0 | 18.3 | 30.9 | 30.5 | 31.9 | 39.2 | 39.2 | 39.9 | 44.1 | 44.7 | 43.7 |
| Torque Sensitivity | oz-in/amp | 1.02 | 2.06 | 2.95 | 1.24 | 2.56 | 3.64 | 1.42 | 2.84 | 4.01 | 1.41 | 2.99 | 4.75 |
| | Nm/amp | 0.0072 | 0.0145 | 0.0208 | 0.0088 | 0.0181 | 0.0257 | 0.0100 | 0.0201 | 0.0283 | 0.0100 | 0.0211 | 0.0335 |
| Back EMF | volts/KRPM | 0.75 | 1.53 | 2.18 | 0.92 | 1.89 | 2.69 | 1.05 | 2.10 | 2.96 | 1.04 | 2.21 | 3.51 |
| | volts/rad/sec | 0.0072 | 0.0145 | 0.0208 | 0.0088 | 0.0181 | 0.0257 | 0.0100 | 0.0201 | 0.0283 | 0.0100 | 0.0211 | 0.0335 |
| Terminal Resistance | ohms | 0.953 | 3.89 | 7.85 | 0.403 | 1.67 | 3.36 | 0.294 | 1.18 | 2.36 | 0.219 | 0.934 | 2.36 |
| Terminal Inductance | mH | 0.254 | 1.100 | 2.210 | 0.181 | 0.742 | 1.460 | 0.172 | 0.692 | 1.374 | 0.128 | 0.447 | 1.220 |
| Motor Constant | oz-in/sq.rt.watt | 1.04 | 1.04 | 1.05 | 1.95 | 1.98 | 1.99 | 2.62 | 2.61 | 2.61 | 3.01 | 3.09 | 3.09 |
| | Nm/sq.rt.watt | 0.00738 | 0.00738 | 0.00744 | 0.01379 | 0.01399 | 0.01402 | 0.01849 | 0.01846 | 0.01843 | 0.02128 | 0.02185 | 0.02183 |
| Rotor Inertia | oz-in-sec ² x 10 ⁻³ | 0.040 | 0.040 | 0.040 | 0.080 | 0.080 | 0.080 | 0.120 | 0.120 | 0.120 | 0.16 | 0.16 | 0.16 |
| | g-cm ² | 2.82 | 2.82 | 2.82 | 5.65 | 5.65 | 5.65 | 8.47 | 8.47 | 8.47 | 11.3 | 11.3 | 11.3 |
| Weight | oz | 3.6 | 3.6 | 3.6 | 5.5 | 5.5 | 5.5 | 7.3 | 7.3 | 7.3 | 9.1 | 9.2 | 9.2 |
| | g | 102.2 | 102.2 | 102.2 | 156.2 | 156.2 | 156.2 | 207.3 | 207.3 | 207.3 | 258.4 | 261.3 | 261.3 |
| # of Poles | | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 |
| Timing | | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° |
| Mech. Time Constant | ms | 5.2 | 5.2 | 5.1 | 3.0 | 2.9 | 2.9 | 2.5 | 2.5 | 2.5 | 2.5 | 2.4 | 2.4 |
| Electrical Time Constant | ms | 0.14 | 0.14 | 0.14 | 0.24 | 0.25 | 0.25 | 0.29 | 0.29 | 0.29 | 0.29 | 0.31 | 0.31 |
| Thermal Resistivity | deg. C/watt | 10.7 | 10.3 | 11.2 | 9.5 | 8.9 | 9.3 | 8.3 | 8.3 | 8.3 | 7.7 | 7.3 | 7.4 |
| Speed/Torque Gradient | rpm/oz-in | 1245.8 | 1234.2 | 1220.6 | 353.3 | 345.2 | 343.2 | 197.2 | 197.9 | 198.8 | 149.3 | 141.3 | 141.6 |

Notes:



1. Motor mounted to a 4 x 4 x 1/4 inches aluminum plate, still air.
2. Maximum winding temperature of 155°C.
3. Typical electrical specifications at 25°C.
4. Motor Terminal Voltages are representative only; motors may be operated at voltages other than those listed in the table. For assistance please contact our applications engineer.
5. For MS (military style) connector, please specify connector housing and terminal.
6. Data for informational purposes only. Should not be considered a binding performance agreement. For specific applications, please contact the factory.

*Many other custom mechanical options are available – consult factory.

**Many other winding options are available – consult factory.

Select your options below and place their code in its corresponding block as shown on page 5.

| TERMINATION | FEEDBACK OPTIONS | OTHER OPTIONS |
|------------------|-----------------------|---------------|
| L – Leads (std) | H – Hall Effect (std) | E – Encoder |
| C – Connector | R – Resolver | G – Gearhead |
| M – MS connector | S – Sensorless | |











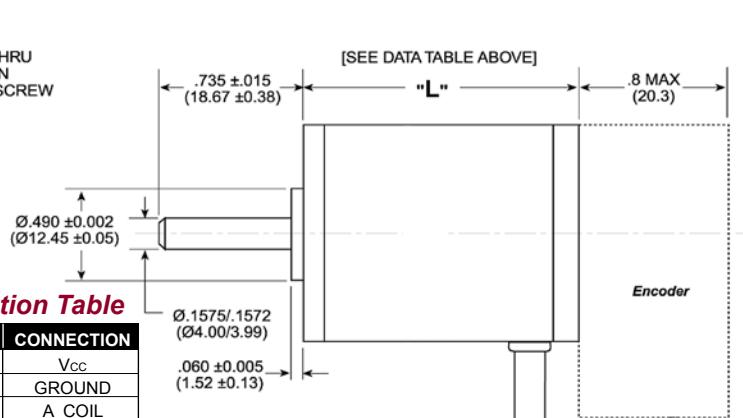
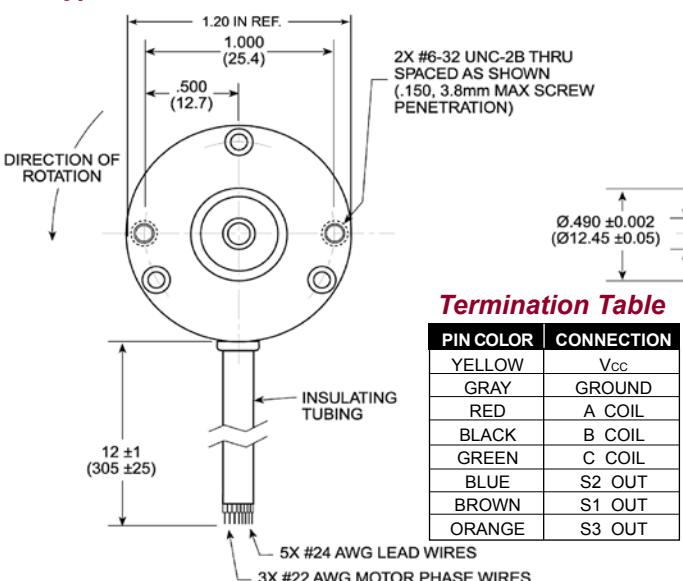
BN12 Typical Outline

Dimensions are in inches (millimeters)

BN12 Performance Curves

BN12 Performance Curves

Blue Series Motors
Inside Rotor

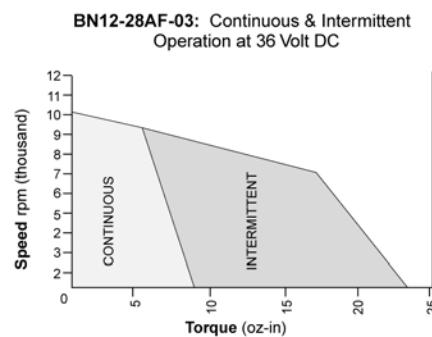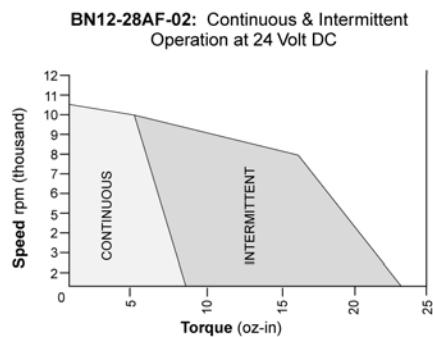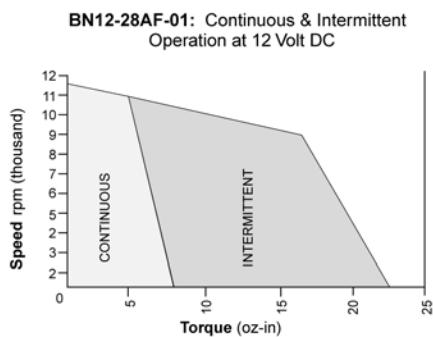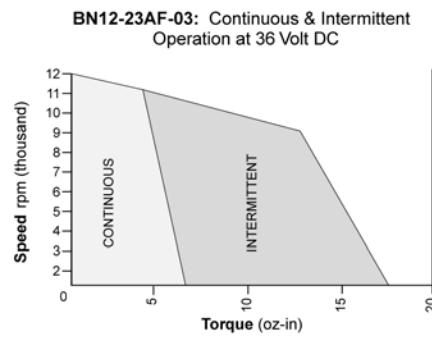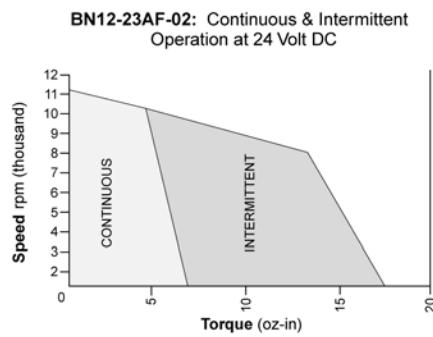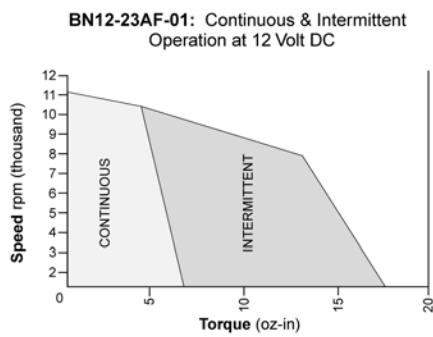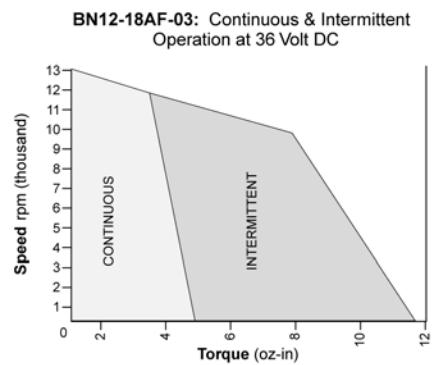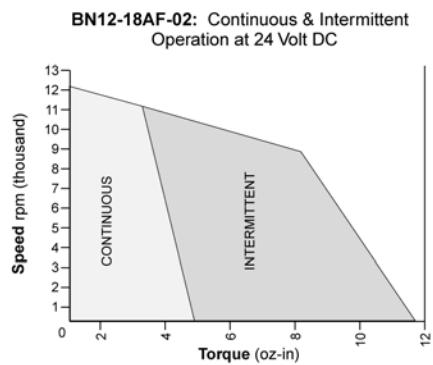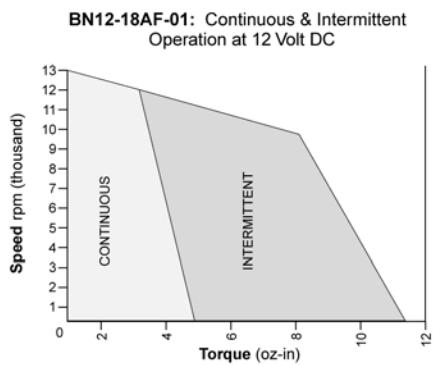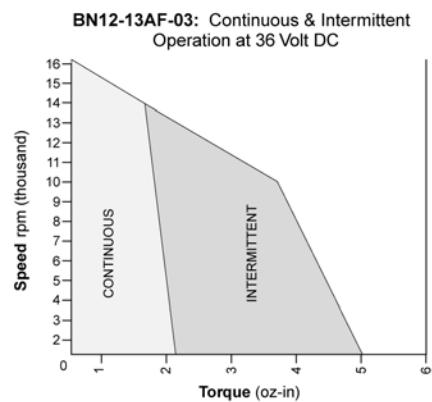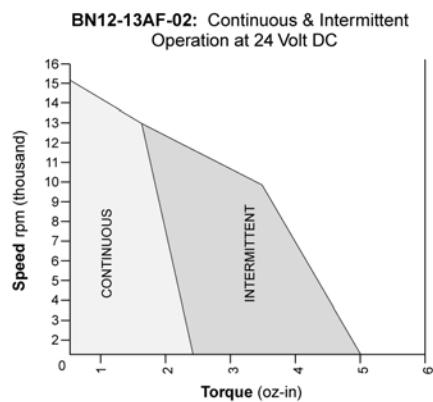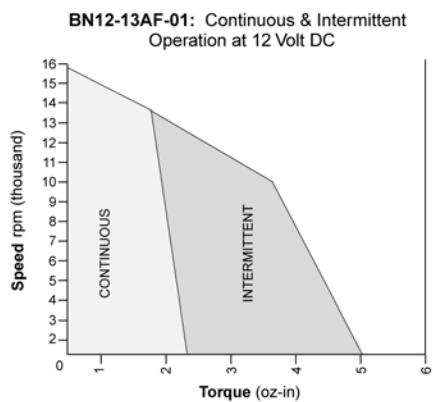

Note: Intermittent operation is based on a 20% duty cycle of one minute on, four minutes off.
Please contact the factory regarding the duty cycle of your application.

BN12 EU Specifications

BN12 EU SPECIFICATIONS -

*Continuous Stall Torque 2.4 - 8.6 oz-in (0.0170 - 0.0587 Nm)
Peak Torque 13 - 77 oz-in (0.0918 - 0.544 Nm)*

| Part Number* | BN12-13EU- <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> | | | BN12-18EU- <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> | | | BN12-23EU- <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> | | | BN12-28EU- <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> | | | |
|-------------------------|--|---------|---------|--|---------|---------|--|---------|---------|--|---------|---------|---------|
| Winding Code** | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 | |
| L = Length | inches | 1.30 | | 1.80 | | 2.30 | | 2.80 | | 3.30 | | 71.12 | |
| | millimeters | 33.02 | | 45.72 | | 58.42 | | 71.12 | | 84.29 | | 800.00 | |
| Terminal Voltage | volts DC | 12 | 24 | 36 | 12 | 24 | 36 | 12 | 24 | 36 | 12 | 24 | 36 |
| Peak Torque | oz-in | 13 | 13 | 14 | 37 | 37 | 39 | 58 | 58 | 61 | 77 | 77 | 72 |
| | Nm | 0.0918 | 0.0918 | 0.0989 | 0.262 | 0.262 | 0.276 | 0.410 | 0.410 | 0.431 | 0.544 | 0.544 | 0.509 |
| Continuous Stall Torque | oz-in | 2.4 | 2.4 | 2.4 | 4.9 | 5.0 | 5.0 | 6.9 | 6.9 | 6.9 | 8.3 | 8.6 | 8.6 |
| | Nm | 0.0170 | 0.0170 | 0.0170 | 0.0346 | 0.0354 | 0.0354 | 0.0488 | 0.0488 | 0.0488 | 0.0587 | 0.0587 | 0.0587 |
| Rated Speed | RPM | 13027 | 12736 | 13753 | 11928 | 11448 | 12320 | 10604 | 10601 | 11489 | 11036 | 10253 | 9529 |
| | rad/sec | 1364 | 1333 | 1440 | 1249 | 1198 | 1290 | 1110 | 1110 | 1203 | 1155 | 1073 | 997 |
| Rated Torque | oz-in | 1.80 | 1.80 | 1.80 | 3.50 | 3.60 | 3.50 | 5.00 | 5.00 | 4.70 | 5.40 | 5.90 | 6.20 |
| | Nm | 0.0127 | 0.0127 | 0.0127 | 0.0248 | 0.0255 | 0.0248 | 0.0354 | 0.0354 | 0.0332 | 0.0382 | 0.0417 | 0.0438 |
| Rated Current | Amps | 2.26 | 1.13 | 0.77 | 3.49 | 1.76 | 1.20 | 4.32 | 2.16 | 1.46 | 4.81 | 2.46 | 1.61 |
| Rated Power | watts | 17.3 | 17.0 | 18.3 | 30.9 | 30.5 | 31.9 | 39.2 | 39.2 | 39.9 | 44.1 | 44.7 | 43.7 |
| Torque Sensitivity | oz-in/amp | 1.02 | 2.06 | 2.95 | 1.24 | 2.56 | 3.64 | 1.42 | 2.84 | 4.01 | 1.41 | 2.99 | 4.75 |
| | Nm/amp | 0.0072 | 0.0146 | 0.0209 | 0.0088 | 0.0180 | 0.0257 | 0.0101 | 0.0201 | 0.0284 | 0.0100 | 0.0212 | 0.0336 |
| Back EMF | volts/KRPM | 0.75 | 1.53 | 2.18 | 0.92 | 1.89 | 2.69 | 1.05 | 2.10 | 2.96 | 1.04 | 2.21 | 3.51 |
| | volts/rad/sec | 0.0072 | 0.0146 | 0.0209 | 0.0088 | 0.0180 | 0.0257 | 0.0101 | 0.0201 | 0.0284 | 0.0100 | 0.0212 | 0.0336 |
| Terminal Resistance | ohms | 0.953 | 3.89 | 7.85 | 0.403 | 1.67 | 3.36 | 0.294 | 1.18 | 2.36 | 0.219 | 0.934 | 2.36 |
| Terminal Inductance | mH | 0.254 | 1.100 | 2.210 | 0.181 | 0.742 | 1.460 | 0.172 | 0.692 | 1.374 | 0.128 | 0.447 | 1.220 |
| Motor Constant | oz-in/sq.rt.watt | 1.0 | 1.1 | 1.1 | 2.0 | 2.0 | 2.0 | 2.6 | 2.6 | 2.6 | 3.0 | 3.1 | 3.1 |
| | Nm/sq.rt.watt | 0.0071 | 0.0078 | 0.0078 | 0.0142 | 0.0142 | 0.0142 | 0.0184 | 0.0184 | 0.0184 | 0.0212 | 0.0219 | 0.0219 |
| Rotor Inertia | oz-in-sec ² | 4.0E-05 | 4.0E-05 | 4.0E-05 | 8.0E-05 | 8.0E-05 | 8.0E-05 | 1.2E-04 | 1.2E-04 | 1.2E-04 | 1.6E-04 | 1.6E-04 | 1.6E-04 |
| | g-cm ² | 2.83 | 2.83 | 2.83 | 5.65 | 5.65 | 5.65 | 8.48 | 8.48 | 8.48 | 11.3 | 11.3 | 11.3 |
| Weight | oz | 3.6 | 3.6 | 3.6 | 5.5 | 5.5 | 5.5 | 7.3 | 7.3 | 7.3 | 9.1 | 9.2 | 9.2 |
| | g | 102 | 102 | 102 | 156 | 156 | 156 | 207 | 207 | 207 | 258 | 261 | 261 |

Notes:

1. Motor mounted to a 4 x 4 x 1/4 inches aluminum plate, still air.
2. Maximum winding temperature of 155°C.
3. Typical electrical specifications at 25°C.
4. Motor Terminal Voltages are representative only; motors may be operated at voltages other than those listed in the table. For assistance please contact our applications engineer.
5. For MS (military style) connector, please specify connector housing and terminal.
6. Data for informational purposes only. Should not be considered a binding performance agreement. For specific applications, please contact the factory.

*Many other custom mechanical options are available – consult factory.

**Many other winding options are available – consult factory.

Select your options below and place their code in its corresponding block as shown on page 5.

T TERMINATION

L – Leads (std)
C – Connector
M – MS connector


F FEEDBACK OPTIONS

H – Hall Effect (std)
R – Resolver
S – Sensorless

OTHER OPTIONS

E – Encoder
G – Gearhead

BN12 EU Typical Outline

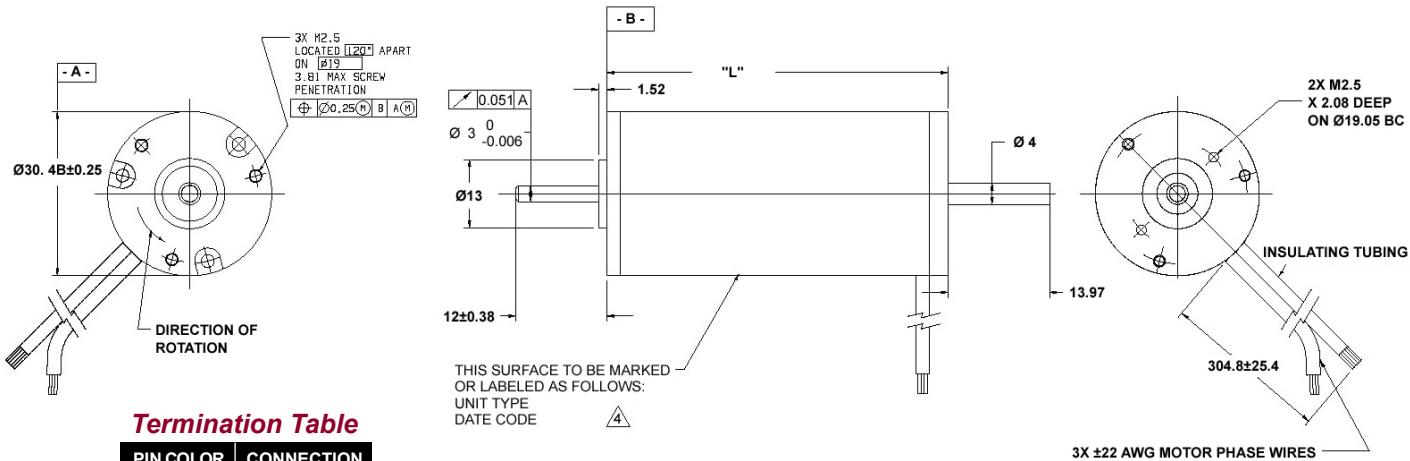













Termination Table

| PIN COLOR | CONNECTION |
|-----------|--------------------|
| YELLOW | V _{cc} |
| GRAY | GROUND |
| RED | A COIL |
| BLACK | B COIL |
| GREEN | C COIL |
| BLUE | S ₂ OUT |
| BROWN | S ₁ OUT |
| ORANGE | S ₃ OUT |

Dimensions are in millimeters

BN12 EU Performance Curves

BN12 EU Performance Curves

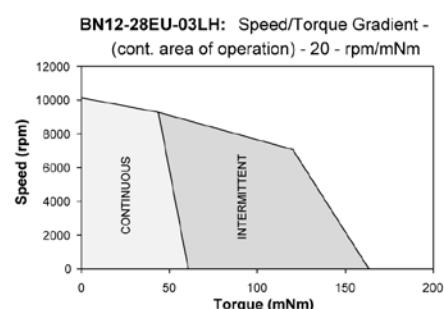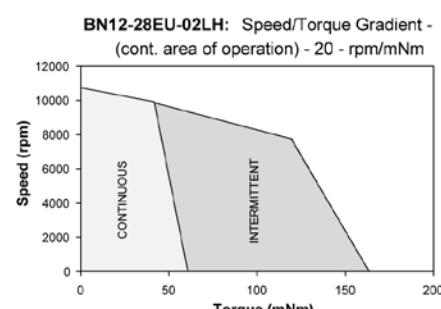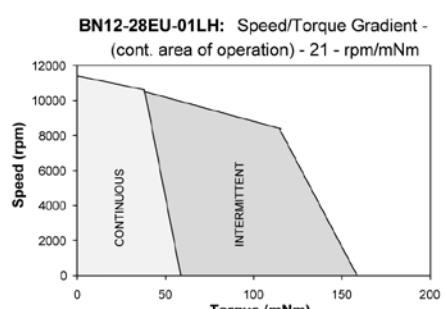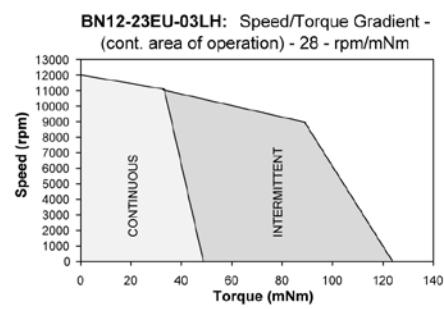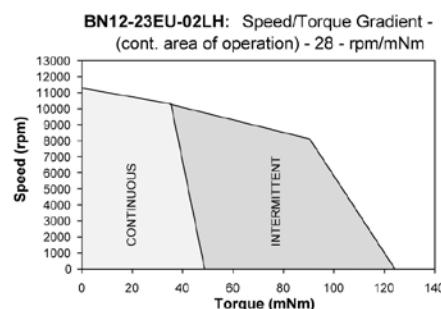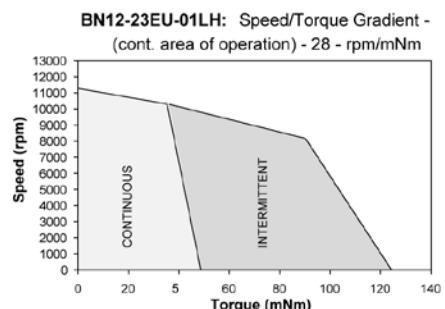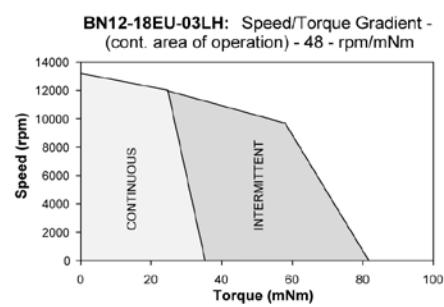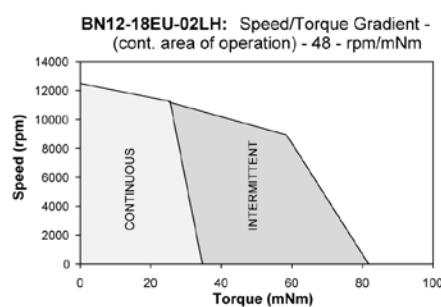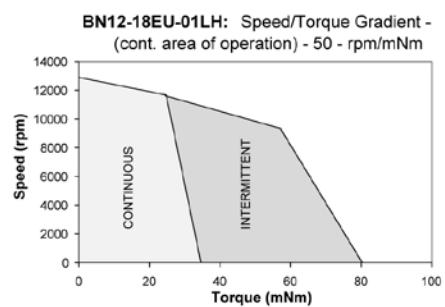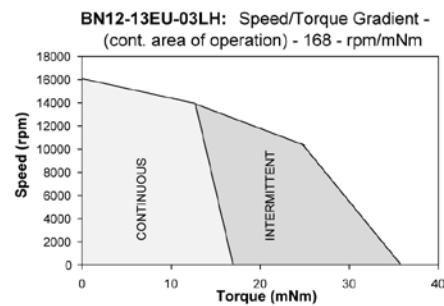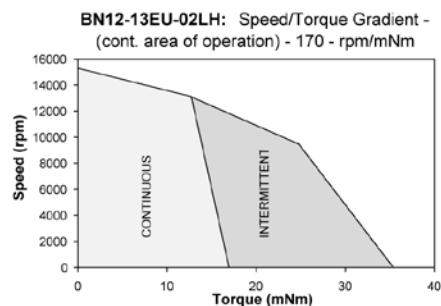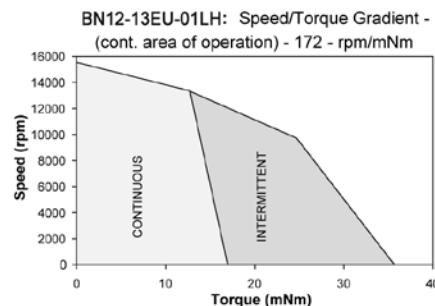

Note: Intermittent operation is based on a 20% duty cycle of one minute on, four minutes off.
Please contact the factory regarding the duty cycle of your application.

BN12 IP65 Specifications

BN12 IP65 SPECIFICATIONS - Continuous Stall Torque 2.4 - 8.6 oz-in (0.0170 - 0.0607 Nm)
 Peak Torque 13 - 77 oz-in (0.0918 - 0.5437 Nm)

| Part Number* | BN12-13IP- | | | BN12-18IP- | | | BN12-23IP- | | | BN12-28IP- | | | |
|--------------------------|--|---------|---------|------------|---------|---------|------------|---------|---------|------------|---------|---------|---------|
| Winding Code** | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 | |
| L = Length | inches | | 1.82 | | | 2.32 | | | 2.82 | | | 3.32 | |
| | millimeters | | 46.2 | | | 58.9 | | | 71.6 | | | 84.3 | |
| Terminal Voltage | volts DC | 12.0 | 24.0 | 36.0 | 12.0 | 24.0 | 36.0 | 12.0 | 24.0 | 36.0 | 12.0 | 24.0 | 36.0 |
| Peak Torque | oz-in | 13.0 | 13.0 | 14.0 | 37.0 | 37.0 | 39.0 | 58.0 | 58.0 | 61.0 | 77.0 | 77.0 | 72.0 |
| | Nm | 0.0918 | 0.0918 | 0.0989 | 0.2613 | 0.2613 | 0.2754 | 0.4096 | 0.4096 | 0.4308 | 0.5437 | 0.5437 | 0.5084 |
| Continuous Stall Torque | oz-in | 2.4 | 2.4 | 2.4 | 4.9 | 5.0 | 5.0 | 6.9 | 6.9 | 6.9 | 8.3 | 8.6 | 8.6 |
| | Nm | 0.0169 | 0.0169 | 0.0169 | 0.0346 | 0.0353 | 0.0353 | 0.0487 | 0.0487 | 0.0487 | 0.0586 | 0.0607 | 0.0607 |
| Rated Speed | RPM | 13027.0 | 12736.0 | 13753.0 | 11928.0 | 11448.0 | 12320.0 | 10604.0 | 10601.0 | 11489.0 | 11036.0 | 10253.0 | 9529.0 |
| | rad/sec | 1364 | 1334 | 1440 | 1249 | 1199 | 1290 | 1110 | 1110 | 1203 | 1156 | 1074 | 998 |
| Rated Torque | oz-in | 1.8 | 1.8 | 1.8 | 3.5 | 3.6 | 3.5 | 5.0 | 5.0 | 4.7 | 5.4 | 5.9 | 6.2 |
| | Nm | 0.0127 | 0.0127 | 0.0127 | 0.0247 | 0.0254 | 0.0247 | 0.0353 | 0.0353 | 0.0332 | 0.0381 | 0.0417 | 0.0438 |
| Rated Current | Amps | 2.26 | 1.13 | 0.77 | 3.49 | 1.76 | 1.20 | 4.32 | 2.16 | 1.46 | 4.81 | 2.46 | 1.61 |
| Rated Power | watts | 17.3 | 17.0 | 18.3 | 30.9 | 30.5 | 31.9 | 39.2 | 39.2 | 39.9 | 44.1 | 44.7 | 43.7 |
| Torque Sensitivity | oz-in/amp | 1.02 | 2.06 | 2.95 | 1.24 | 2.56 | 3.64 | 1.42 | 2.84 | 4.01 | 1.41 | 2.99 | 4.75 |
| | Nm/amp | 0.0072 | 0.0145 | 0.0208 | 0.0088 | 0.0181 | 0.0257 | 0.0100 | 0.0201 | 0.0283 | 0.0100 | 0.0211 | 0.0335 |
| Back EMF | volts/KRPM | 0.75 | 1.53 | 2.18 | 0.92 | 1.89 | 2.69 | 1.05 | 2.10 | 2.96 | 1.04 | 2.21 | 3.51 |
| | volts/rad/sec | 0.0072 | 0.0145 | 0.0208 | 0.0088 | 0.0181 | 0.0257 | 0.0100 | 0.0201 | 0.0283 | 0.0100 | 0.0211 | 0.0335 |
| Terminal Resistance | ohms | 0.953 | 3.89 | 7.85 | 0.403 | 1.67 | 3.36 | 0.294 | 1.18 | 2.36 | 0.219 | 0.934 | 2.36 |
| Terminal Inductance | mH | 0.254 | 1.100 | 2.210 | 0.181 | 0.742 | 1.460 | 0.172 | 0.692 | 1.374 | 0.128 | 0.447 | 1.220 |
| Motor Constant | oz-in/sq.rt.watt | 1.04 | 1.04 | 1.05 | 1.95 | 1.98 | 1.99 | 2.62 | 2.61 | 3.01 | 3.09 | 3.09 | 3.09 |
| | Nm/sq.rt.watt | 0.00738 | 0.00738 | 0.00744 | 0.01379 | 0.01399 | 0.01402 | 0.01849 | 0.01846 | 0.01843 | 0.02128 | 0.02185 | 0.02183 |
| Rotor Inertia | oz-in-sec ² ×10 ⁻³ | 0.040 | 0.040 | 0.040 | 0.080 | 0.080 | 0.080 | 0.120 | 0.120 | 0.120 | 0.16 | 0.16 | 0.16 |
| | g·cm ² | 2.82 | 2.82 | 2.82 | 5.65 | 5.65 | 5.65 | 8.47 | 8.47 | 8.47 | 11.3 | 11.3 | 11.3 |
| Weight | oz | 3.6 | 3.6 | 3.6 | 5.5 | 5.5 | 5.5 | 7.3 | 7.3 | 7.3 | 9.1 | 9.2 | 9.2 |
| | g | 102.2 | 102.2 | 102.2 | 156.2 | 156.2 | 156.2 | 207.3 | 207.3 | 207.3 | 258.4 | 261.3 | 261.3 |
| # of Poles | | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 |
| Timing | | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° |
| Mech. Time Constant | ms | 5.2 | 5.2 | 5.1 | 3.0 | 2.9 | 2.9 | 2.5 | 2.5 | 2.5 | 2.5 | 2.4 | 2.4 |
| Electrical Time Constant | ms | 0.14 | 0.14 | 0.14 | 0.24 | 0.25 | 0.25 | 0.29 | 0.29 | 0.29 | 0.29 | 0.31 | 0.31 |
| Thermal Resistivity | deg. C/watt | 10.7 | 10.3 | 11.2 | 9.5 | 8.9 | 9.3 | 8.3 | 8.3 | 8.3 | 7.7 | 7.3 | 7.4 |
| Speed/Torque Gradient | rpm/oz-in | 1245.8 | 1234.2 | 1220.6 | 353.3 | 345.2 | 343.2 | 197.2 | 197.9 | 198.8 | 149.3 | 141.3 | 141.6 |

Notes:

1. Motor mounted to a 4 x 4 x 1/4 inches aluminum plate, still air.
 2. Maximum winding temperature of 155°C.
 3. Typical electrical specifications at 25°C.
 4. Motor Terminal Voltages are representative only; motors may be operated at voltages other than those listed in the table. For assistance please contact our applications engineer.
 5. Calculated (theoretical) speed/torque gradient.
 6. For MS (military style) connector, please specify connector housing and terminal.
 7. Data for informational purposes only. Should not be considered a binding performance agreement.
- For specific applications, please contact the factory.

*Many other custom mechanical options are available – consult factory.

**Many other winding options are available – consult factory.

Select your options below and place their code in its corresponding block as shown on page 5.

T TERMINATION

L – Leads (std)


C – Connector

M – MS connector

F FEEDBACK OPTIONS

H – Hall Effect (std)

G – Gearhead

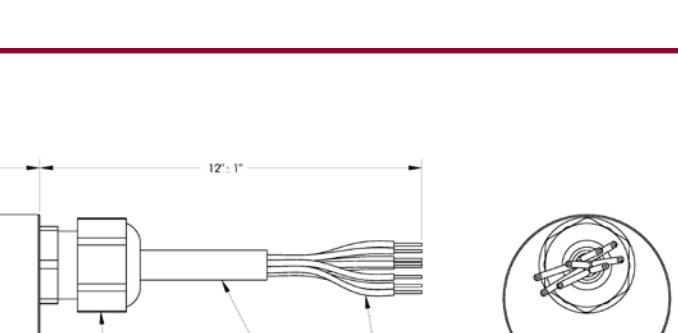
**Termination Table**

| PIN COLOR | CONNECTION |
|-----------|--------------------|
| YELLOW | V _{cc} |
| GRAY | GROUND |
| RED | A COIL |
| BLACK | B COIL |
| GREEN | C COIL |
| BLUE | S ₂ OUT |
| BROWN | S ₁ OUT |
| ORANGE | S ₃ OUT |

Dimensions are in inches

BN12 IP65 Performance Curves

BN12 IP65 Performance Curves

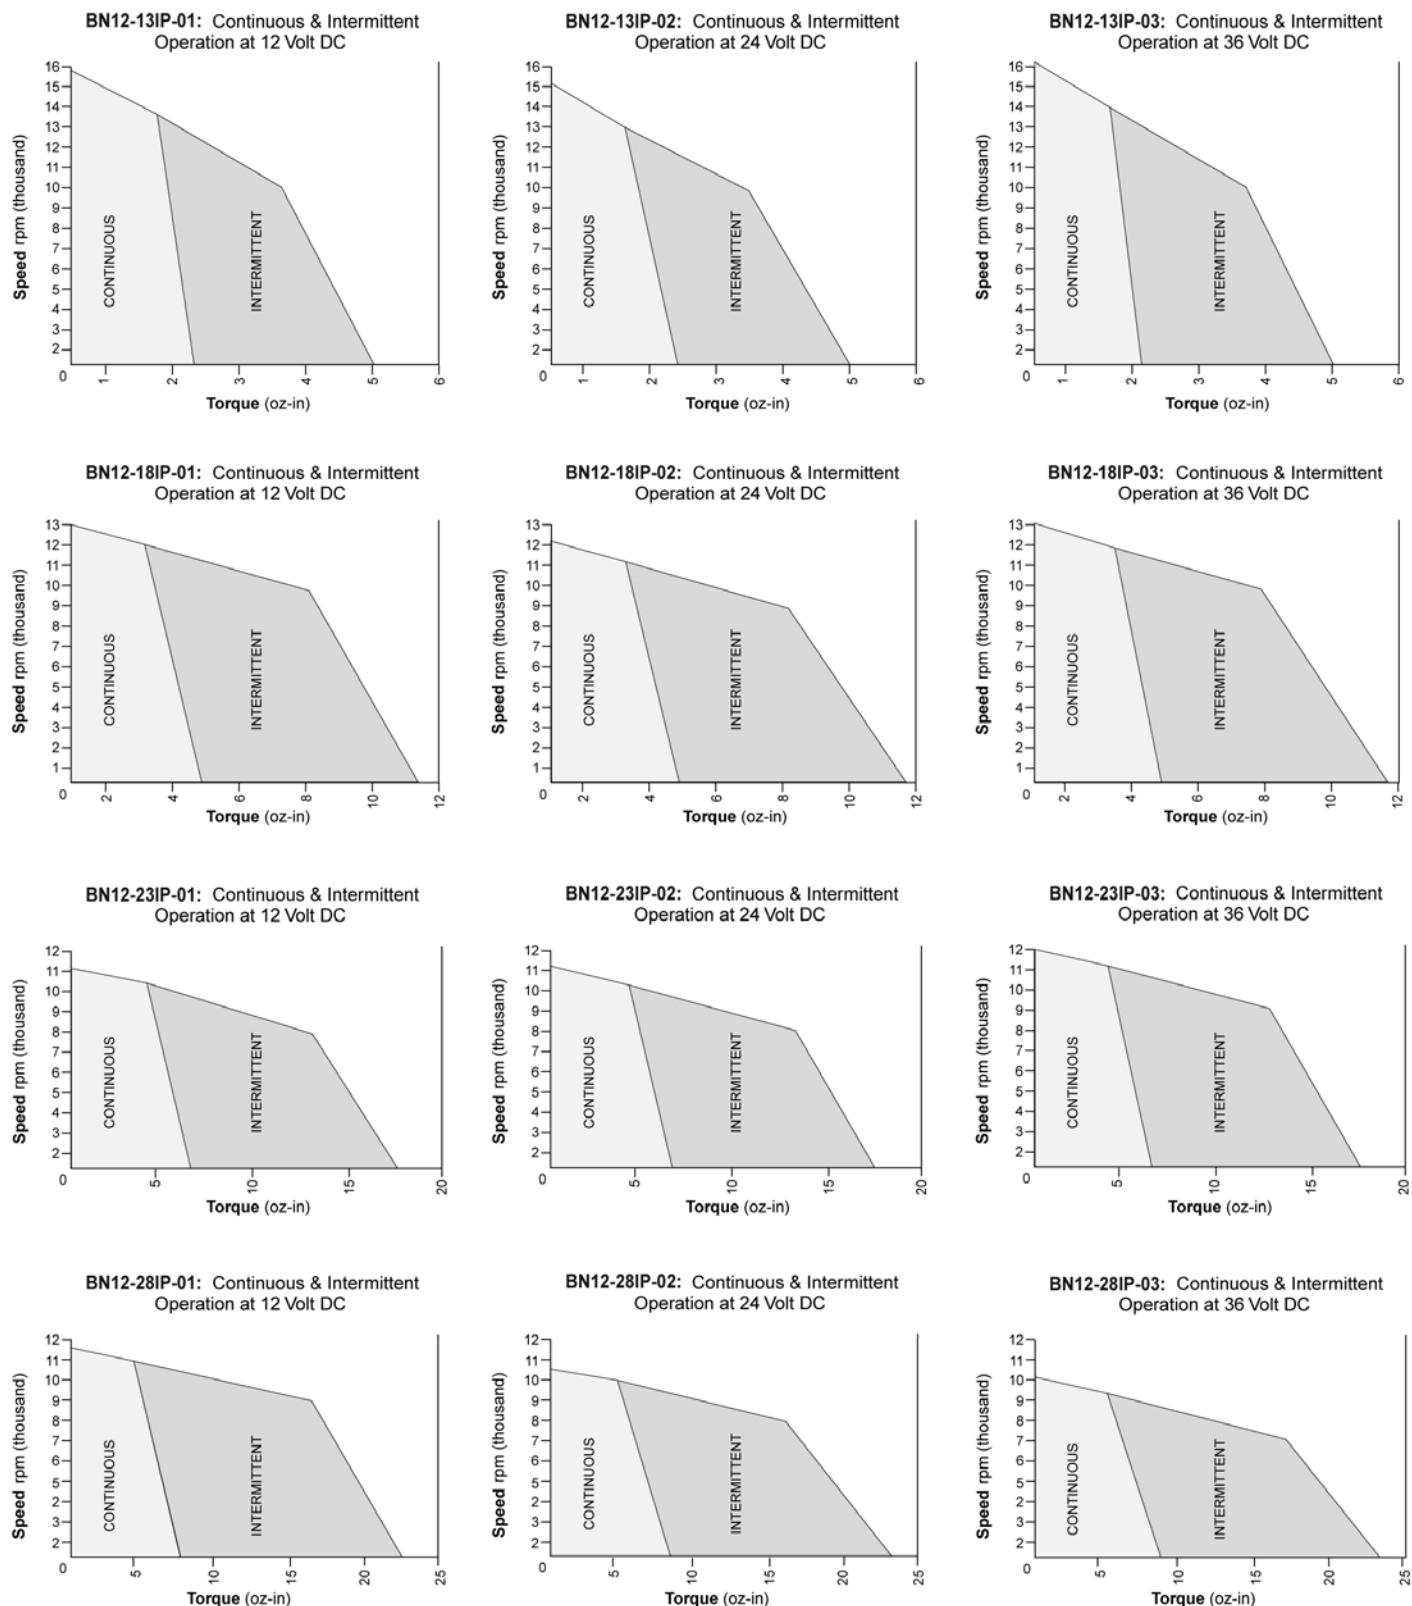

Note: Intermittent operation is based on a 20% duty cycle of one minute on, four minutes off.
Please contact the factory regarding the duty cycle of your application.

BN17 Specifications

BN17 SPECIFICATIONS - *Continuous Stall Torque 11.0 to 21.0 oz-in (.078 - .148 Nm)
Peak Torque 21 - 66 oz-in (.148 - .466 Nm)*

| Part Number* | BN17-15AA- <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> T F <input type="checkbox"/> | | | BN17-20AA- <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> T F <input type="checkbox"/> | | | BN17-25AA- <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> T F <input type="checkbox"/> | | | |
|--|---|--------|--------|---|--------|--------|---|-------|-------|-------|
| Winding Code** | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 | |
| L = Length inches | 1.5 | | | 2 | | | 2.5 | | | |
| | millimeters | | | 38.1 | | | 50.8 | | | |
| Terminal Voltage | volts DC | 12 | 24 | 36 | 12 | 24 | 36 | 12 | 24 | 36 |
| Peak Torque oz-in | 22 | 21 | 21 | 45 | 45 | 45 | 66 | 65 | 65 | |
| | Nm | 0.155 | 0.148 | 0.148 | 0.318 | 0.318 | 0.318 | 0.466 | 0.459 | 0.459 |
| Continuous Stall Torque oz-in | 11 | 11 | 12 | 17 | 18 | 19 | 19 | 20 | 21 | |
| | Nm | 0.078 | 0.078 | 0.085 | 0.120 | 0.127 | 0.134 | 0.134 | 0.141 | 0.148 |
| No-Load Speed | RPM | 12,322 | 16,830 | 16,290 | 10,185 | 10,484 | 11,084 | 9,554 | 9,582 | 9,000 |
| Rated Speed RPM | 8037 | 13,498 | 12,945 | 5568 | 7131 | 7937 | 5535 | 6908 | 6344 | |
| | rad/sec | 841 | 1413 | 1355 | 583 | 747 | 831 | 580 | 723 | 664 |
| Rated Torque oz-in | 9.22 | 8.2 | 9.25 | 14.85 | 16.01 | 16.5 | 16.15 | 15.1 | 17.81 | |
| | Nm | 0.065 | 0.058 | 0.065 | 0.105 | 0.113 | 0.117 | 0.114 | 0.107 | 0.126 |
| Rated Current | Amps | 8.38 | 4.71 | 3.33 | 10.6 | 5.31 | 3.78 | 11.29 | 5.57 | 3.62 |
| Rated Power | watts | 55 | 82 | 89 | 61 | 84 | 97 | 66 | 77 | 84 |
| Torque Sensitivity oz-in/amp | 1.29 | 1.83 | 2.9 | 1.54 | 3.05 | 4.34 | 1.68 | 3.32 | 5.33 | |
| | Nm/amp | 0.009 | 0.013 | 0.020 | 0.011 | 0.022 | 0.031 | 0.012 | 0.023 | 0.038 |
| Back EMF volts/KRPM | 0.95 | 1.35 | 2.14 | 1.14 | 2.26 | 3.21 | 1.24 | 2.45 | 3.94 | |
| | volts/rad/sec | 0.009 | 0.013 | 0.020 | 0.011 | 0.022 | 0.031 | 0.012 | 0.023 | 0.038 |
| Terminal Resistance | ohms | 0.228 | 0.531 | 1.154 | 0.206 | 0.672 | 1.277 | 0.194 | 0.594 | 1.414 |
| Terminal Inductance | mH | 0.201 | 0.437 | 1.100 | 0.178 | 0.437 | 1.466 | 0.168 | 0.648 | 1.661 |
| Motor Constant oz-in/sq.rt.watt | 2.70 | 2.51 | 2.70 | 3.39 | 3.72 | 3.84 | 3.81 | 4.31 | 4.48 | |
| | Nm/sq.rt.watt | 0.019 | 0.018 | 0.019 | 0.024 | 0.026 | 0.027 | 0.027 | 0.030 | 0.032 |
| Rotor Inertia oz-in-sec ² x 10 ⁻³ | 0.26 | 0.26 | 0.26 | 0.4 | 0.4 | 0.4 | 0.48 | 0.40 | 0.48 | |
| | g-cm ² | 18.41 | 18.41 | 18.41 | 28.33 | 28.33 | 28.33 | 33.99 | 33.99 | 33.99 |
| Weight oz | 7 | 7 | 7 | 10.4 | 10.4 | 10.3 | 13.7 | 13.6 | 13.7 | |
| | g | 198 | 198 | 198 | 294 | 294 | 291 | 388 | 385 | 388 |
| # of Poles | | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Timing | | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° |
| Mech. Time Constant | ms | 21.3 | 16 | 16 | 18.1 | 14.5 | 14.5 | 19.1 | 18.6 | 13.1 |
| Electrical Time Constant | ms | 0.20 | 0.18 | 0.67 | 0.18 | 0.42 | 0.61 | 0.40 | 0.98 | 0.90 |
| Thermal Resistivity | deg. C/watt | 2.95 | 3.95 | 3.93 | 1.86 | 2.86 | 3.14 | 1.77 | 2.18 | 2.64 |
| Speed/Torque Gradient | rpm/oz-in | 465 | 406 | 362 | 311 | 210 | 191 | 249 | 177 | 149 |

Notes:

1. Motor mounted to a 4 x 4 x 1/4 inches aluminum plate, still air.
2. Maximum winding temperature of 155°C.
3. Typical electrical specifications at 25°C.
4. Motor Terminal Voltages are representative only; motors may be operated at voltages other than those listed in the table. For assistance please contact our applications engineer.
5. For MS (military style) connector, please specify connector housing and terminal.
6. Data for informational purposes only. Should not be considered a binding performance agreement. For specific applications, please contact the factory.

*Many other custom mechanical options are available – consult factory.

**Many other winding options are available – consult factory.

Select your options below and place their code in its corresponding block as shown on page 5.

T TERMINATION

L – Leads (std)

C – Connector

M – MS connector

F FEEDBACK OPTIONS

H – Hall Effect (std)

R – Resolver



S – Sensorless

O OTHER OPTIONS

E – Encoder










G – Gearhead

BN17 Typical Outline

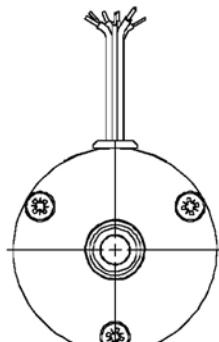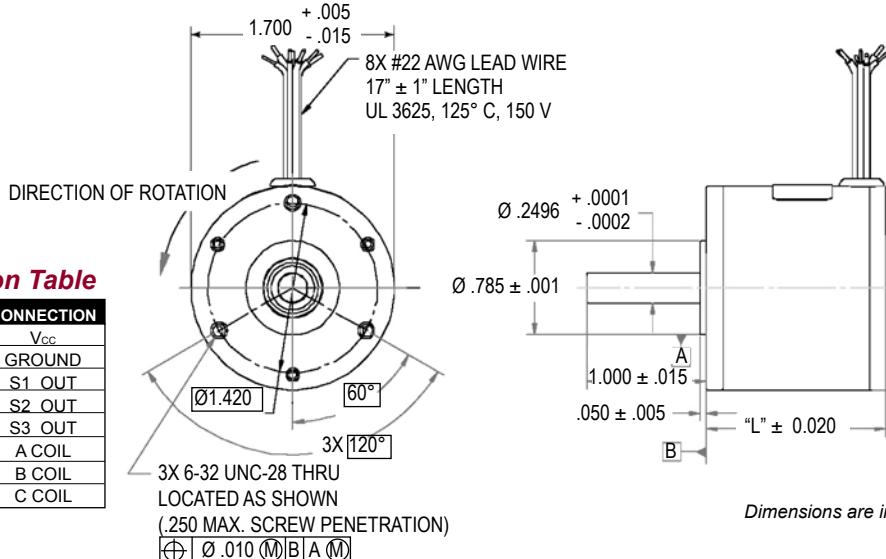

BN17 Performance Curves

BN17 Performance Curves

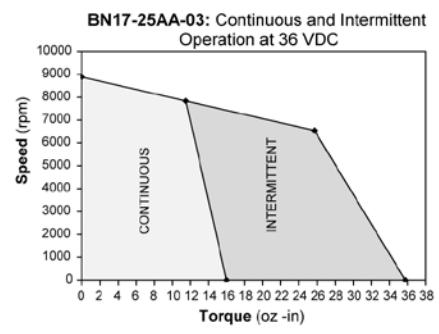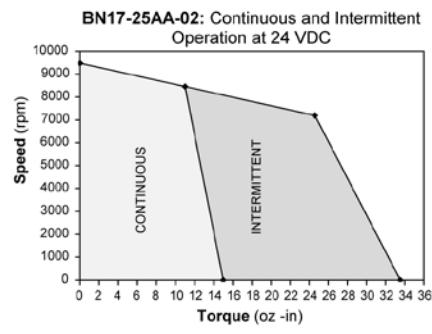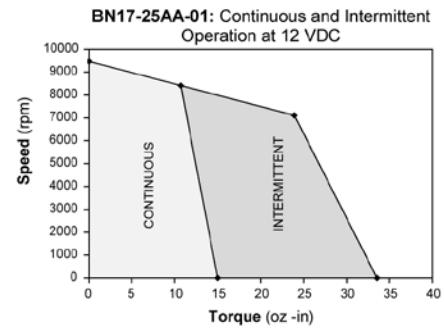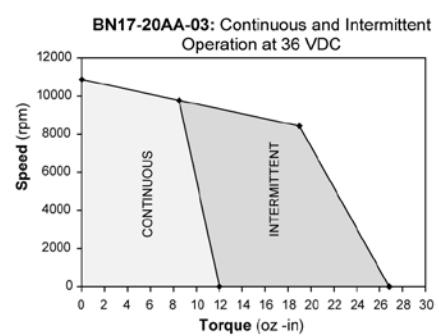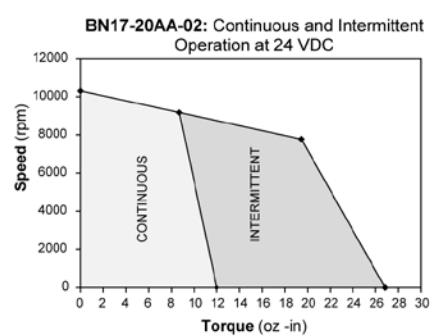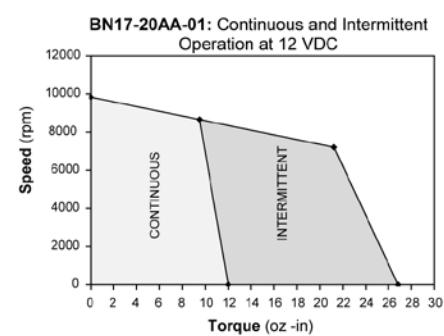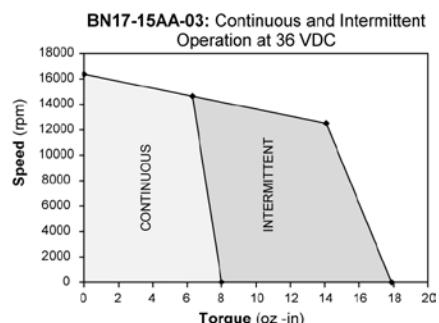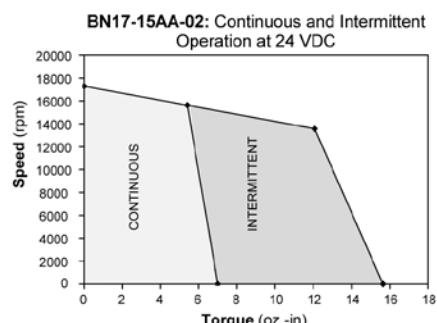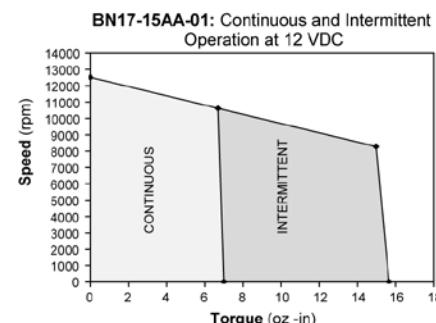

Note: Intermittent operation is based on a 20% duty cycle of one minute on, four minutes off.
Please contact the factory regarding the duty cycle of your application.

BN17 IP65 Specifications

BN17 IP65 SPECIFICATIONS - Continuous Stall Torque 11.0 to 21.0 oz-in (.078 - .148 Nm)
Peak Torque 21 - 66 oz-in (.148 - .466 Nm)

| Part Number* | | BN17-15IP- <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> T <input type="checkbox"/> F <input type="checkbox"/> | | | BN17-20IP- <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> T <input checked="" type="checkbox"/> F <input type="checkbox"/> | | | BN17-25IP- <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> T <input checked="" type="checkbox"/> F <input type="checkbox"/> | | |
|--------------------------|---|--|--------|--------|---|--------|--------|--|-------|-------|
| Winding Code** | | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 |
| L = Length | inches | 2.06 | | | 2.56 | | | 3.06 | | |
| | millimeters | 52.32 | | | 65.02 | | | 77.72 | | |
| Terminal Voltage | volts DC | 12 | 24 | 36 | 12 | 24 | 36 | 12 | 24 | 36 |
| Peak Torque | oz-in | 22 | 21 | 21 | 45 | 45 | 45 | 66 | 65 | 65 |
| | Nm | 0.155 | 0.148 | 0.148 | 0.318 | 0.318 | 0.318 | 0.466 | 0.459 | 0.459 |
| Continuous Stall Torque | oz-in | 11 | 11 | 12 | 17 | 18 | 19 | 19 | 20 | 21 |
| | Nm | 0.078 | 0.078 | 0.085 | 0.120 | 0.127 | 0.134 | 0.134 | 0.141 | 0.148 |
| No-Load Speed | RPM | 12,322 | 16,830 | 16,290 | 10,185 | 10,484 | 11,084 | 9,554 | 9,582 | 9,000 |
| Rated Speed | RPM | 8037 | 13,498 | 12,945 | 5568 | 7131 | 7937 | 5535 | 6908 | 6344 |
| | rad/sec | 841 | 1413 | 1355 | 583 | 747 | 831 | 580 | 723 | 664 |
| Rated Torque | oz-in | 9.22 | 8.2 | 9.25 | 14.85 | 16.01 | 16.5 | 16.15 | 15.1 | 17.81 |
| | Nm | 0.065 | 0.058 | 0.065 | 0.105 | 0.113 | 0.117 | 0.114 | 0.107 | 0.126 |
| Rated Current | Amps | 8.38 | 4.71 | 3.33 | 10.6 | 5.31 | 3.78 | 11.29 | 5.57 | 3.62 |
| Rated Power | watts | 55 | 82 | 89 | 61 | 84 | 97 | 66 | 77 | 84 |
| Torque Sensitivity | oz-in/amp | 1.29 | 1.83 | 2.9 | 1.54 | 3.05 | 4.34 | 1.68 | 3.32 | 5.33 |
| | Nm/amp | 0.009 | 0.013 | 0.020 | 0.011 | 0.022 | 0.031 | 0.012 | 0.023 | 0.038 |
| Back EMF | volts/KRPM | 0.95 | 1.35 | 2.14 | 1.14 | 2.26 | 3.21 | 1.24 | 2.45 | 3.94 |
| | volts/rad/sec | 0.009 | 0.013 | 0.020 | 0.011 | 0.022 | 0.031 | 0.012 | 0.023 | 0.038 |
| Terminal Resistance | ohms | 0.228 | 0.531 | 1.150 | 0.206 | 0.672 | 1.277 | 0.194 | 0.594 | 1.414 |
| Terminal Inductance | mH | 0.201 | 0.437 | 1.100 | 0.178 | 0.437 | 1.466 | 0.168 | 0.648 | 1.661 |
| Motor Constant | oz-in/sq.rt.watt | 2.70 | 2.51 | 2.70 | 3.39 | 3.72 | 3.84 | 3.81 | 4.31 | 4.48 |
| | Nm/sq.rt.watt | 0.019 | 0.018 | 0.019 | 0.024 | 0.026 | 0.027 | 0.027 | 0.030 | 0.032 |
| Rotor Inertia | oz-in-sec ² x 10 ⁻³ | 0.26 | 0.26 | 0.26 | 0.4 | 0.4 | 0.4 | 0.48 | 0.48 | 0.48 |
| | g-cm ² | 18.41 | 18.41 | 18.41 | 28.33 | 28.33 | 28.33 | 33.99 | 33.99 | 33.99 |
| Weight | oz | 7 | 7 | 7 | 10.4 | 10.4 | 10.3 | 13.7 | 13.6 | 13.7 |
| | g | 198 | 198 | 198 | 294 | 294 | 291 | 388 | 385 | 388 |
| # of Poles | | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Timing | | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° |
| Mech. Time Constant | ms | 21.3 | 16 | 16 | 18.1 | 14.5 | 14.5 | 19.1 | 18.6 | 13.1 |
| Electrical Time Constant | ms | 0.20 | 0.18 | 0.67 | 0.18 | 0.42 | 0.61 | 0.40 | 0.98 | 0.90 |
| Thermal Resistivity | deg. C/watt | 2.95 | 3.95 | 3.93 | 1.86 | 2.86 | 3.14 | 1.77 | 2.18 | 2.64 |
| Speed/Torque Gradient | rpm/oz-in | 465 | 406 | 362 | 311 | 210 | 191 | 249 | 177 | 149 |

Notes:

1. Motor mounted to a 4 x 4 x 1/4 inches aluminum plate, still air.
2. Maximum winding temperature of 155°C.
3. Typical electrical specifications at 25°C.
4. Motor Terminal Voltages are representative only; motors may be operated at voltages other than those listed in the table. For assistance please contact our applications engineer.
5. For MS (military style) connector, please specify connector housing and terminal.
6. Data for informational purposes only. Should not be considered a binding performance agreement. For specific applications, please contact the factory.

*Many other custom mechanical options are available – consult factory.


**Many other winding options are available – consult factory.

Select your options below and place their code in its corresponding block as shown on page 5.

T TERMINATION **F FEEDBACK OPTIONS** **G OTHER OPTIONS**
 L – Leads (std) H – Hall Effect (std)
 C – Connector M – MS connector G – Gearhead


BN17 IP65 Housed / Frameless

BN17 IP65 Typical Outline - Housed

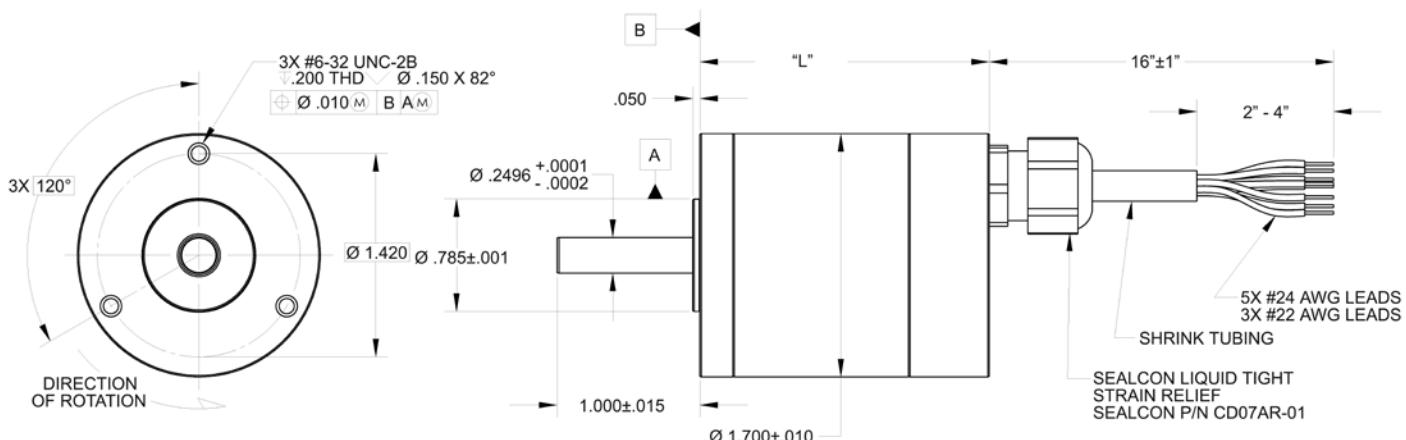

Inside Rotor
Brushless Motors

BN17 IP65 Typical Outline - Frameless

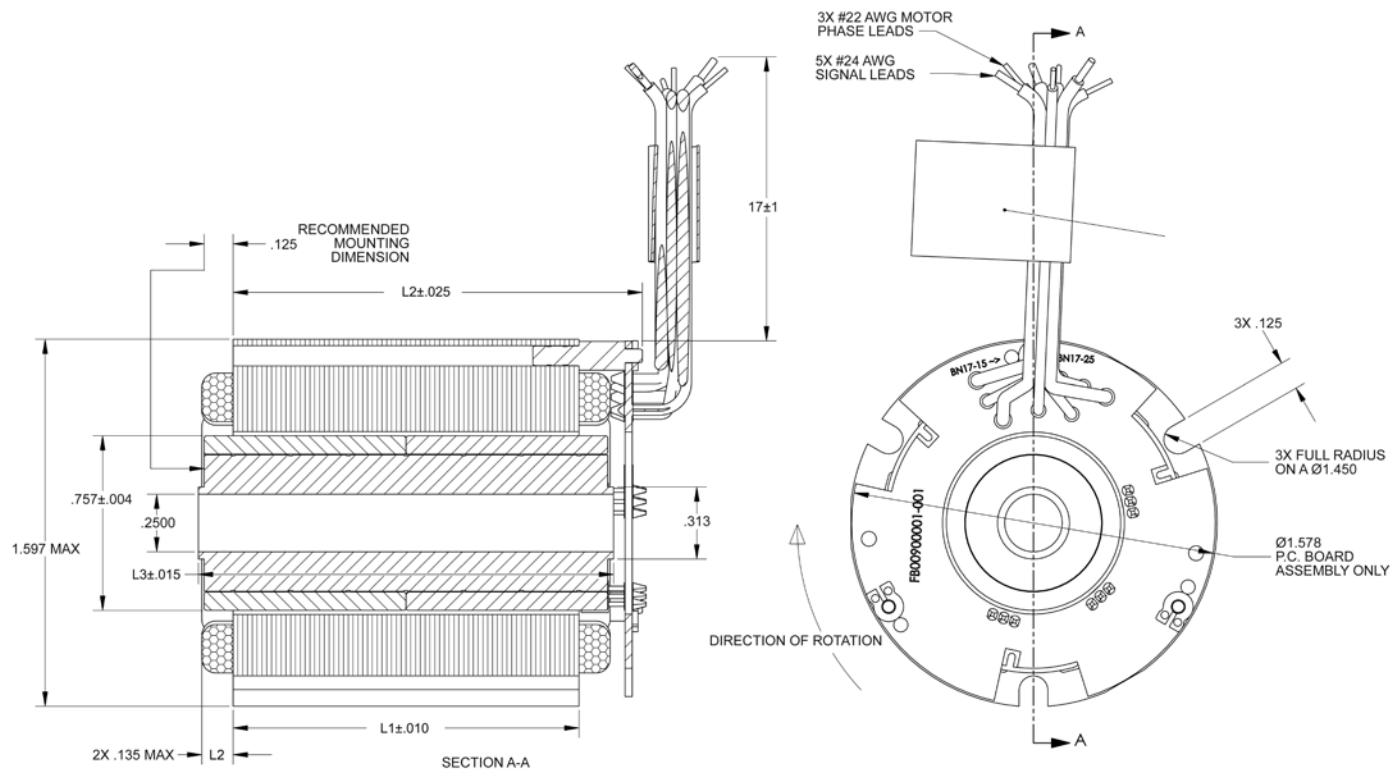

Termination Table










| PIN COLOR | CONNECTION |
|-----------|-----------------|
| YELLOW | V _{cc} |
| GRAY | GROUND |
| BROWN | S1_OUT |
| BLUE | S2_OUT |
| ORANGE | S3_OUT |
| RED | A COIL |
| BLACK | B COIL |
| GREEN | C COIL |

| PART NUMBER | L1 | L2 | L3 |
|----------------|-------|-------|-------|
| BN17-15ZA-XXLH | 0.500 | 0.780 | 0.800 |
| BN17-20ZA-XXLH | 1.000 | 1.280 | 1.300 |
| BN17-25ZA-XXLH | 1.500 | 1.780 | 1.800 |

Note: For electrical performance see page 14.

BN17 IP65 Performance Curves

BN17 IP65 Performance Curves

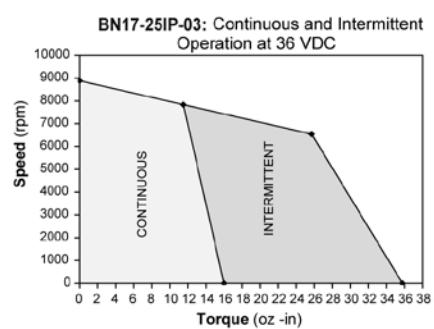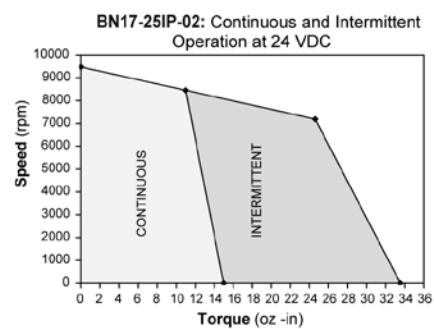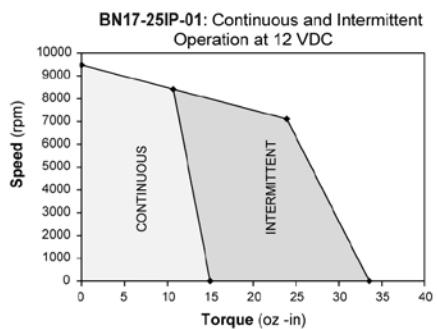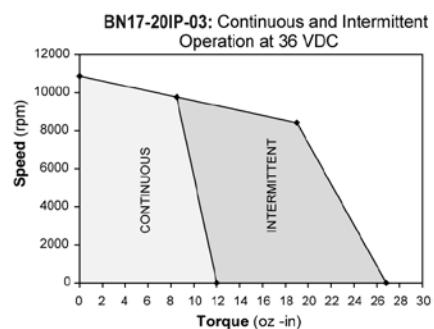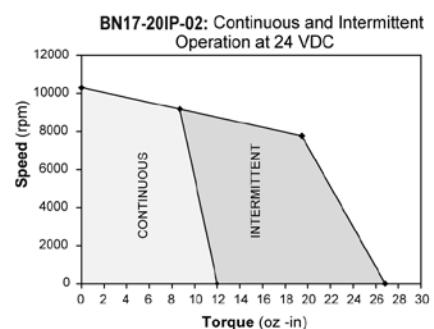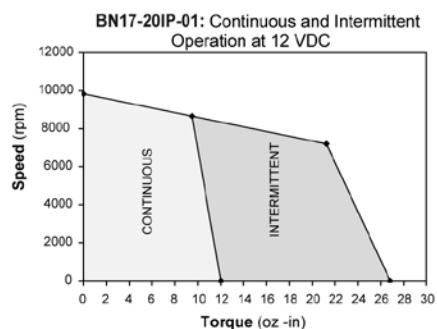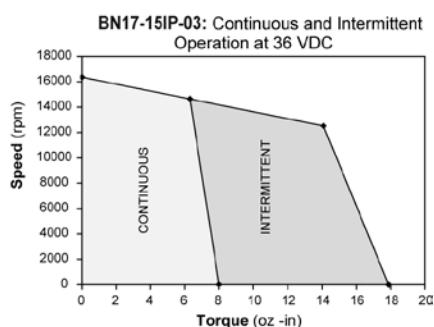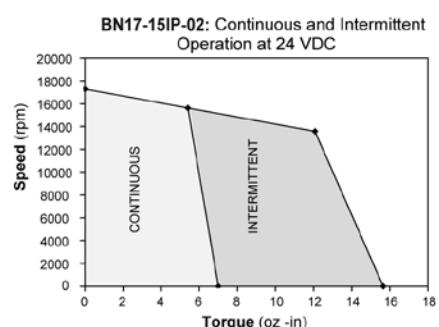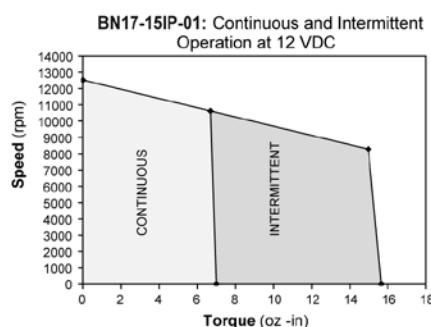

Note: Intermittent operation is based on a 20% duty cycle of one minute on, four minutes off.
Please contact the factory regarding the duty cycle of your application.

BN23 Specifications

BN23 SPECIFICATIONS -

*Continuous Stall Torque 14.6 - 54.3 oz-in (0.103 - 0.384 Nm)
Peak Torque 35 - 186 oz-in (0.2472 - 1.3134 Nm)*

| Part Number* | | BN23-13MG- | | | BN23-18MG- | | | BN23-23MG- | | | BN23-28MG- | | |
|--------------------------|--|------------|--------|--------|------------|--------|--------|------------|--------|--------|------------|--------|--------|
| Winding Code** | | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 |
| L = Length | inches | 1.40 | | | 1.90 | | | 2.40 | | | 2.90 | | |
| | millimeters | 35.6 | | | 48.3 | | | 60.9 | | | 73.7 | | |
| Terminal Voltage | volts DC | 24 | 36 | 48 | 24 | 36 | 48 | 24 | 36 | 48 | 24 | 36 | 48 |
| Peak Torque | oz-in | 35 | 35 | 35 | 88 | 88 | 88 | 143 | 143 | 143 | 186 | 186 | 186 |
| | Nm | 0.2472 | 0.2472 | 0.2472 | 0.6214 | 0.6214 | 0.6214 | 1.0098 | 1.0098 | 1.0098 | 1.3134 | 1.3134 | 1.3134 |
| Continuous Stall Torque | oz-in | 14.6 | 17.7 | 14.2 | 30.7 | 31.4 | 35.2 | 42.8 | 44.7 | 42.9 | 50.4 | 54.3 | 53.2 |
| | Nm | 0.103 | 0.125 | 0.100 | 0.217 | 0.221 | 0.248 | 0.303 | 0.315 | 0.303 | 0.356 | 0.384 | 0.376 |
| No-Load Speed | | 12,200 | 12,500 | 12,300 | 9,100 | 9,700 | 10,200 | 8,100 | 8,800 | 8,200 | 7,300 | 7,500 | 8,100 |
| Rated Speed | RPM | 8650 | 9060 | 9190 | 6460 | 7000 | 7130 | 6060 | 6700 | 6250 | 5340 | 5590 | 6140 |
| | rad/sec | 906 | 949 | 962 | 676 | 733 | 747 | 635 | 702 | 655 | 559 | 585 | 643 |
| Rated Torque | oz-in | 14.2 | 16.1 | 12.1 | 29.7 | 29.8 | 32.9 | 40.3 | 42.3 | 41.8 | 49.1 | 51.9 | 48.8 |
| | Nm | 0.100 | 0.114 | 0.085 | 0.210 | 0.210 | 0.232 | 0.285 | 0.299 | 0.295 | 0.347 | 0.366 | 0.345 |
| Rated Current | Amps | 5.80 | 4.30 | 2.38 | 7.75 | 5.43 | 4.88 | 9.47 | 7.44 | 5.00 | 10.45 | 7.66 | 5.85 |
| Rated Power | watts | 91 | 108 | 82 | 142 | 154 | 174 | 181 | 210 | 193 | 194 | 215 | 222 |
| Torque Sensitivity | oz-in/amp | 2.55 | 3.78 | 5.18 | 3.40 | 4.90 | 6.25 | 3.85 | 5.35 | 7.79 | 4.26 | 6.30 | 7.80 |
| | Nm/amp | 0.018 | 0.027 | 0.037 | 0.024 | 0.035 | 0.044 | 0.027 | 0.038 | 0.055 | 0.030 | 0.044 | 0.055 |
| Back EMF | volts/KRPM | 1.89 | 2.80 | 3.83 | 2.51 | 3.62 | 4.62 | 2.85 | 3.96 | 5.76 | 3.15 | 4.66 | 5.77 |
| | volts/rad/sec | 0.018 | 0.027 | 0.037 | 0.024 | 0.035 | 0.044 | 0.027 | 0.038 | 0.055 | 0.030 | 0.044 | 0.055 |
| Terminal Resistance | ohms | 0.465 | 0.939 | 1.890 | 0.246 | 0.507 | 0.800 | 0.178 | 0.347 | 0.715 | 0.181 | 0.366 | 0.576 |
| Terminal Inductance | mH | 0.350 | 0.758 | 1.53 | 0.275 | 0.580 | 0.930 | 0.220 | 0.420 | 0.900 | 0.230 | 0.490 | 0.770 |
| Motor Constant | oz-in/sq.rt.watt | 3.74 | 3.90 | 3.77 | 6.86 | 6.88 | 6.99 | 9.13 | 9.08 | 9.21 | 10.01 | 10.41 | 10.28 |
| | Nm/sq.rt.watt | 0.026 | 0.028 | 0.027 | 0.048 | 0.049 | 0.049 | 0.064 | 0.064 | 0.065 | 0.071 | 0.074 | 0.073 |
| Rotor Inertia | oz-in-sec ² x10 ⁻³ | 0.51 | 0.51 | 0.51 | 0.99 | 0.99 | 0.99 | 1.5 | 1.5 | 1.5 | 1.9 | 1.9 | 1.9 |
| | g-cm ² | 36 | 36 | 36 | 70 | 70 | 70 | 106 | 106 | 106 | 134 | 134 | 134 |
| Weight | oz | 8.3 | 8.4 | 8.3 | 13.6 | 13.7 | 13.8 | 19.1 | 19.1 | 19.1 | 24.4 | 24.7 | 24.5 |
| | g | 234.0 | 238.0 | 234.0 | 386.0 | 389.0 | 391.0 | 542.0 | 542.0 | 542.0 | 693.0 | 699.0 | 694.0 |
| # of Poles | | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 |
| Timing | | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° |
| Mech. Time Constant | ms | 5.20 | 4.7 | 5.1 | 3.0 | 3.0 | 2.9 | 2.5 | 2.6 | 2.5 | 2.7 | 2.5 | 2.5 |
| Electrical Time Constant | ms | 0.75 | 0.81 | 0.81 | 1.12 | 1.14 | 1.16 | 1.24 | 1.21 | 1.26 | 1.27 | 1.34 | 1.34 |
| Thermal Resistivity | deg. C/watt | 2.28 | 2.34 | 3.44 | 2.49 | 2.67 | 1.81 | 2.36 | 1.89 | 2.35 | 1.93 | 1.80 | 1.86 |
| Speed/Torque Gradient | rpm/oz-in | 250.0 | 213.7 | 257.0 | 88.9 | 90.6 | 93.3 | 50.6 | 49.6 | 46.7 | 39.9 | 36.8 | 40.2 |

Notes:

1. Motor mounted to a 6 x 6 x 1/4 inches aluminum plate, still air.
2. Maximum winding temperature of 155°C.
3. Typical electrical specifications at 25°C.
4. Data shown for 8 pole motors. Please consult factory for 4 pole specifications.
5. Motor Terminal Voltages are representative only; motors may be operated at voltages other than those listed in the table. For assistance please contact our applications engineer.
6. For MS (military style) connector, please specify connector housing and terminal.
7. Data for informational purposes only. Should not be considered a binding performance agreement. For specific applications, please contact the factory.

*Many other custom mechanical options are available – consult factory.

**Many other winding options are available – consult factory.

Select your options below and place their code in its corresponding block as shown on page 5.

T TERMINATION

- L – Leads (std)
C – Connector
M – MS connector

F FEEDBACK OPTIONS


- H – Hall Effect (std)
R – Resolver
S – Sensorless

O OTHER OPTIONS

- E – Encoder
G – Gearhead

BN23 Housed / Frameless

BN23 Typical Outline - Housed

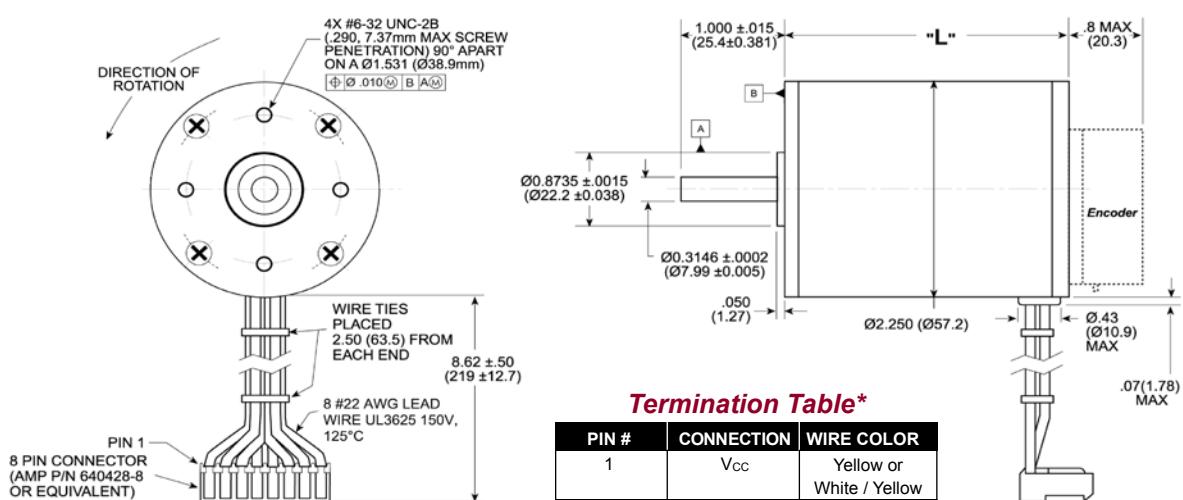


Termination Table*

| PIN # | CONNECTION | WIRE COLOR |
|-------|------------|--------------------------|
| 1 | Vcc | Yellow or White / Yellow |
| 2 | GROUND | White / Gray |
| 3 | A COIL | White / Violet |
| 4 | B COIL | White / Black |
| 5 | C COIL | Green |
| 6 | S2 OUT | White / Blue |
| 7 | S1 OUT | White / Brown |
| 8 | S3 OUT | White |

Dimensions are in inches (millimeters)

*We reserve the right to use solid color wires or white wires with color trace.

BN23 Typical Outline - Frameless

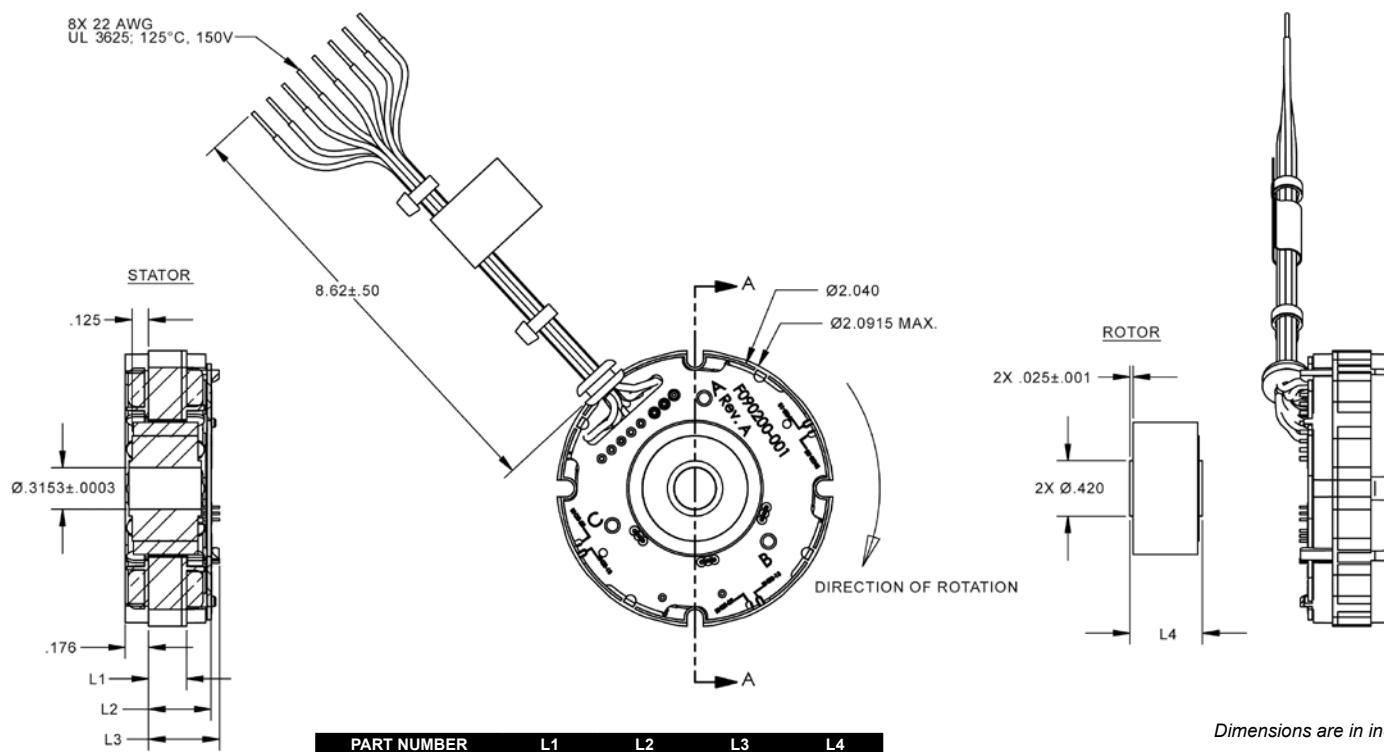


Dimensions are in inches

| PART NUMBER | L1 | L2 | L3 | L4 |
|-----------------|-------|-------|-------|-------|
| BN23-13ZMG-XXLH | 0.288 | 0.474 | 0.550 | 0.550 |
| BN23-18ZMG-XXLH | 0.788 | 0.974 | 1.050 | 1.050 |
| BN23-23ZMG-XXLH | 1.288 | 1.470 | 1.550 | 1.550 |
| BN23-28ZMG-XXLH | 1.788 | 1.970 | 2.050 | 2.050 |

Note: For electrical performance see page 17.

BN23 Performance Curves

BN23 Performance Curves

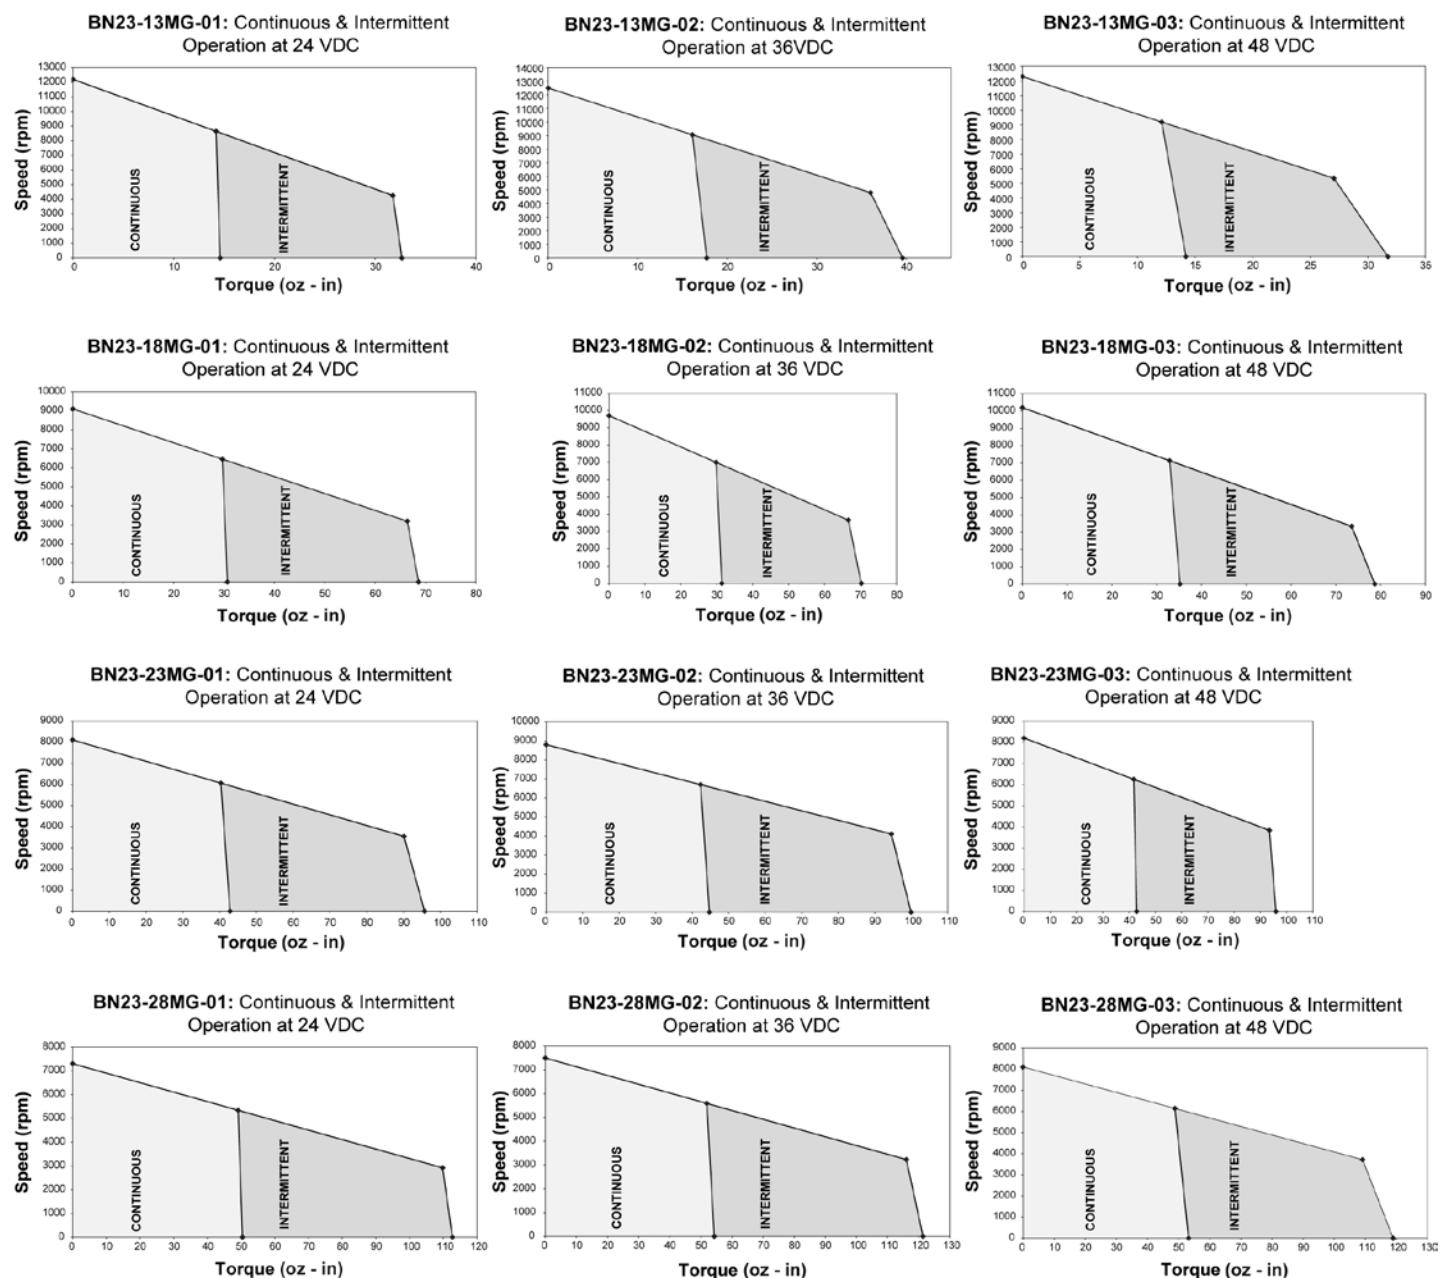

Note: Intermittent operation is based on a 20% duty cycle of one minute on, four minutes off.
Please contact the factory regarding the duty cycle of your application.

BN23 EU Specifications

BN23 EU SPECIFICATIONS -

*Continuous Stall Torque 14.6 - 54.3 oz-in (0.103 - 0.384 Nm)
Peak Torque 35 - 186 oz-in (0.2472 - 1.3134 Nm)*

| Part Number* | BN23-13EU- <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> | | | BN23-18EU- <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> | | | BN23-23EU- <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> | | | BN23-28EU- <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> | | | |
|--------------------------|--|--------|--------|--|--------|--------|--|--------|--------|--|--------|--------|--------|
| Winding Code** | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 | |
| L = Length | inches | | 1.40 | inches | | 1.90 | inches | | 2.40 | inches | | 2.90 | |
| | millimeters | | 35.6 | millimeters | | 48.3 | millimeters | | 60.9 | millimeters | | 73.7 | |
| Terminal Voltage | volts DC | 24 | 36 | 48 | 24 | 36 | 48 | 24 | 36 | 48 | 24 | 36 | 48 |
| Peak Torque | oz-in | 35 | 35 | 35 | 88 | 88 | 88 | 143 | 143 | 143 | 186 | 186 | 186 |
| | Nm | 0.2472 | 0.2472 | 0.2472 | 0.6214 | 0.6214 | 0.6214 | 1.0098 | 1.0098 | 1.0098 | 1.3134 | 1.3134 | 1.3134 |
| Continuous Stall Torque | oz-in | 14.6 | 17.7 | 14.2 | 30.7 | 31.4 | 35.2 | 42.8 | 44.7 | 42.9 | 50.4 | 54.3 | 53.2 |
| | Nm | 0.103 | 0.125 | 0.100 | 0.217 | 0.221 | 0.248 | 0.303 | 0.315 | 0.303 | 0.356 | 0.384 | 0.376 |
| No-Load Speed | RPM | 12,200 | 12,500 | 12,300 | 9,100 | 9,700 | 10,200 | 8,100 | 8,800 | 8,200 | 7,300 | 7,500 | 8,100 |
| Rated Speed | rad/sec | 906 | 949 | 962 | 676 | 733 | 747 | 635 | 702 | 655 | 559 | 585 | 643 |
| | oz-in | 14.2 | 16.1 | 12.1 | 29.7 | 29.8 | 32.9 | 40.3 | 42.3 | 41.8 | 49.1 | 51.9 | 48.8 |
| Rated Torque | Nm | 0.100 | 0.114 | 0.085 | 0.210 | 0.210 | 0.232 | 0.285 | 0.299 | 0.295 | 0.347 | 0.366 | 0.345 |
| Rated Current | Amps | 5.80 | 4.30 | 2.38 | 7.75 | 5.43 | 4.88 | 9.47 | 7.44 | 5.00 | 10.45 | 7.66 | 5.85 |
| Rated Power | watts | 91 | 108 | 82 | 142 | 154 | 174 | 181 | 210 | 193 | 194 | 215 | 222 |
| Torque Sensitivity | oz-in/amp | 2.55 | 3.78 | 5.18 | 3.40 | 4.90 | 6.25 | 3.85 | 5.35 | 7.79 | 4.26 | 6.30 | 7.80 |
| | Nm/amp | 0.018 | 0.027 | 0.037 | 0.024 | 0.035 | 0.044 | 0.027 | 0.038 | 0.055 | 0.030 | 0.044 | 0.055 |
| Back EMF | volts/KRPM | 1.89 | 2.80 | 3.83 | 2.51 | 3.62 | 4.62 | 2.85 | 3.96 | 5.76 | 3.15 | 4.66 | 5.77 |
| | volts/rad/sec | 0.018 | 0.027 | 0.037 | 0.024 | 0.035 | 0.044 | 0.027 | 0.038 | 0.055 | 0.030 | 0.044 | 0.055 |
| Terminal Resistance | ohms | 0.465 | 0.939 | 1.890 | 0.246 | 0.507 | 0.800 | 0.178 | 0.347 | 0.715 | 0.181 | 0.366 | 0.576 |
| Terminal Inductance | mH | 0.350 | 0.758 | 1.53 | 0.275 | 0.580 | 0.930 | 0.220 | 0.420 | 0.900 | 0.230 | 0.490 | 0.770 |
| Motor Constant | oz-in/sq.rt.watt | 3.74 | 3.90 | 3.77 | 6.86 | 6.88 | 6.99 | 9.13 | 9.08 | 9.21 | 10.01 | 10.41 | 10.28 |
| | Nm/sq.rt.watt | 0.026 | 0.028 | 0.027 | 0.048 | 0.049 | 0.049 | 0.064 | 0.064 | 0.065 | 0.071 | 0.074 | 0.073 |
| Rotor Inertia | oz-in-sec ² ×10 ⁻³ | 0.51 | 0.51 | 0.51 | 0.99 | 0.99 | 0.99 | 1.5 | 1.5 | 1.5 | 1.9 | 1.9 | 1.9 |
| | g-cm ² | 36 | 36 | 36 | 70 | 70 | 70 | 106 | 106 | 106 | 134 | 134 | 134 |
| Weight | oz | 8.3 | 8.4 | 8.3 | 13.6 | 13.7 | 13.8 | 19.1 | 19.1 | 19.1 | 24.4 | 24.7 | 24.5 |
| | g | 234.0 | 238.0 | 234.0 | 386.0 | 389.0 | 391.0 | 542.0 | 542.0 | 542.0 | 693.0 | 699.0 | 694.0 |
| # of Poles | | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 |
| Timing | | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° |
| Mech. Time Constant | ms | 5.20 | 4.7 | 5.1 | 3.0 | 3.0 | 2.9 | 2.5 | 2.6 | 2.5 | 2.7 | 2.5 | 2.5 |
| Electrical Time Constant | ms | 0.75 | 0.81 | 0.81 | 1.12 | 1.14 | 1.16 | 1.24 | 1.21 | 1.26 | 1.27 | 1.34 | 1.34 |
| Thermal Resistivity | deg. C/watt | 2.28 | 2.34 | 3.44 | 2.49 | 2.67 | 1.81 | 2.36 | 1.89 | 2.35 | 1.93 | 1.80 | 1.86 |
| Speed/Torque Gradient | rpm/oz-in | 250.0 | 213.7 | 257.0 | 88.9 | 90.6 | 93.3 | 50.6 | 49.6 | 46.7 | 39.9 | 36.8 | 40.2 |

Notes:

1. Motor mounted to a 6" x 6" x 1/4" aluminum plate, still air.
2. Maximum winding temperature of 155°C.
3. Typical electrical specifications at 25°C.
4. Data shown for 8 pole motors. Please consult factory for 4 pole specifications.
5. Motor Terminal Voltages are representative only; motors may be operated at voltages other than those listed in the table. For assistance please contact our applications engineer.
6. For MS (military style) connector, please specify connector housing and terminal.
7. Data for informational purposes only. Should not be considered a binding performance agreement. For specific applications, please contact the factory.

*Many other custom mechanical options are available – consult factory.

**Many other winding options are available – consult factory.

Select your options below and place their code in its corresponding block as shown on page 5.

T TERMINATION

L – Leads (std)
C – Connector
M – MS connector


F FEEDBACK OPTIONS

H – Hall Effect (std)
R – Resolver
S – Sensorless

OTHER OPTIONS

E – Encoder
G – Gearhead

BN23 EU Typical Outline

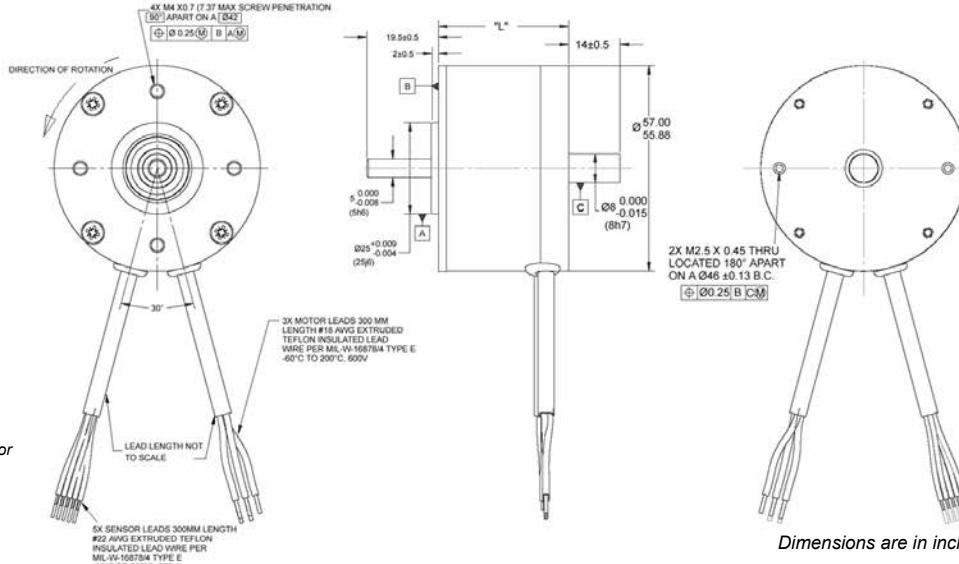


*We reserve the right to use solid color wires or white wires with color trace.

Dimensions are in inches (millimeters)

BN23 EU Performance Curves

BN23 EU Performance Curves

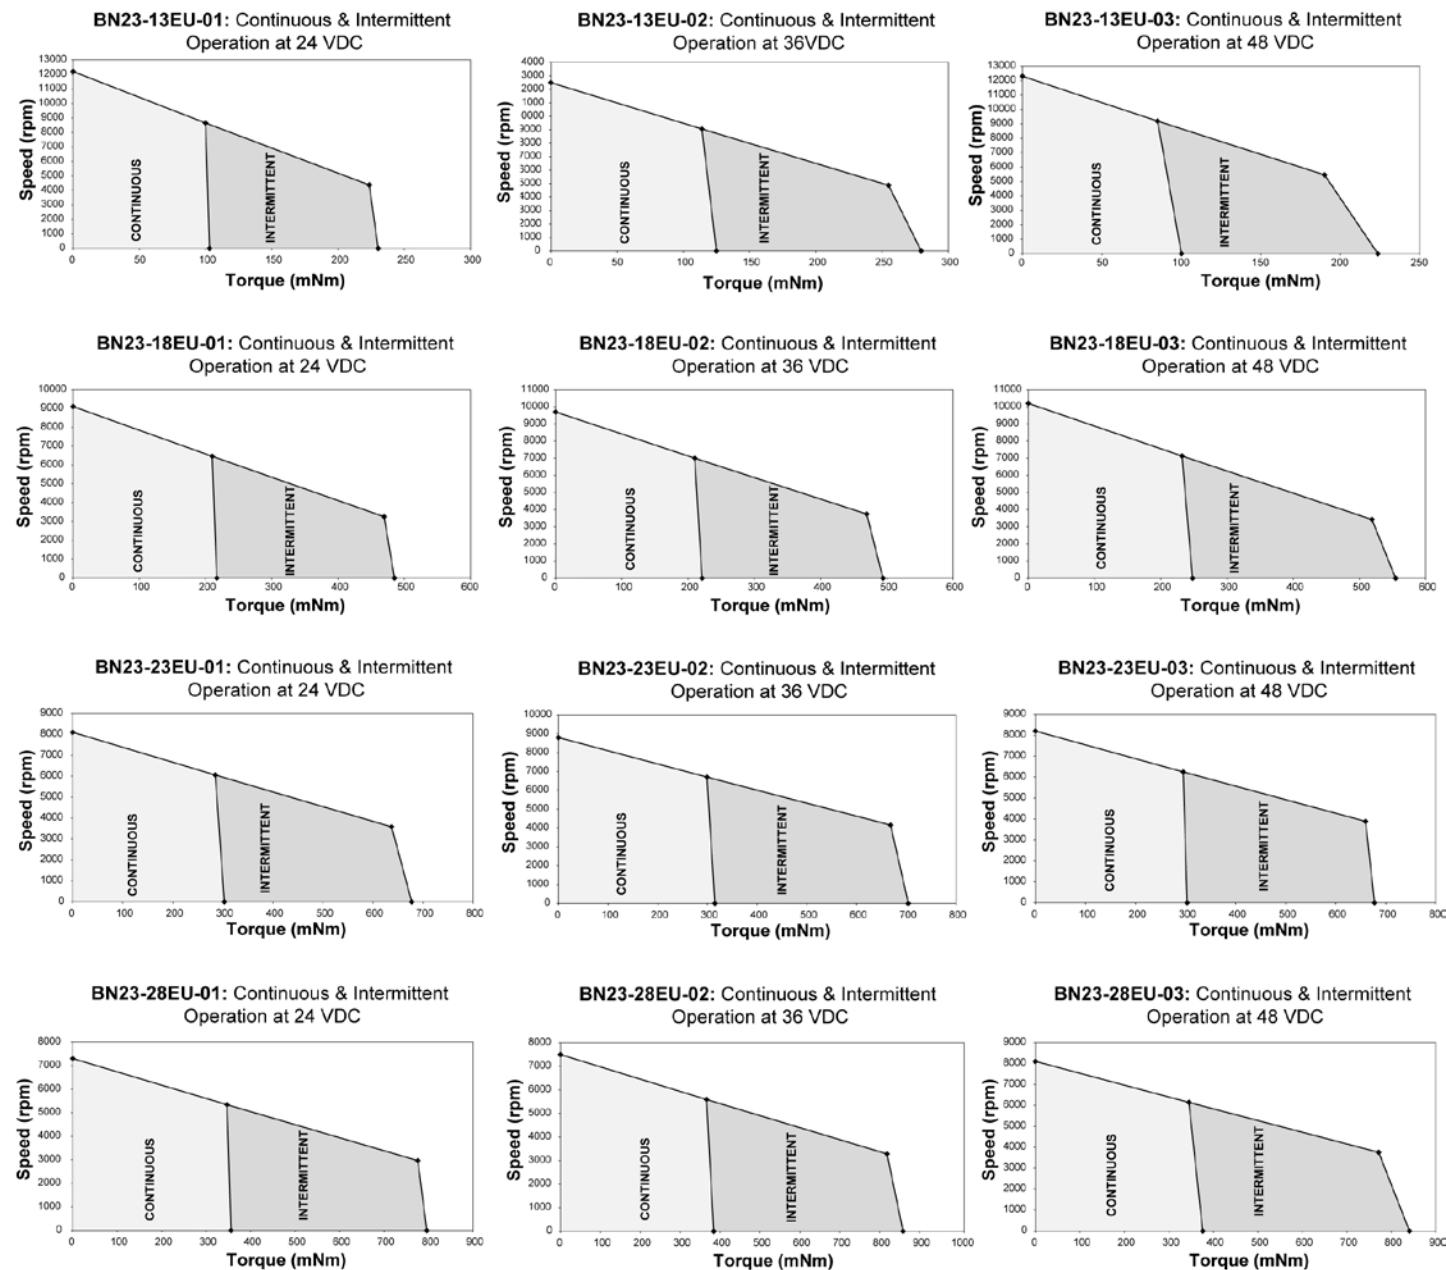

S/T Gradient = 35.4 rpm/mNm

Note: Intermittent operation is based on a 20% duty cycle of one minute on, four minutes off.
Please contact the factory regarding the duty cycle of your application.

BN23 IP65 Specifications

*Continuous Stall Torque 12.6 - 41 oz-in (0.0890 - 0.290 Nm)
BN23 IP65 SPECIFICATIONS - Peak Torque 35 - 186 oz-in (0.248 - 1.32 Nm)*

| Part Number* | BN23-13IP- | | | BN23-18IP- | | | BN23-23IP- | | | BN23-28IP- | | | |
|--------------------------|---|--------|--------|------------|--------|--------|------------|--------|--------|------------|--------|--------|--------|
| Winding Code** | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 | |
| L = Length | inches | 2.43 | | 2.93 | | 3.43 | | 3.93 | | 4.43 | | 4.93 | |
| | millimeters | 61.72 | | 74.42 | | 87.12 | | 99.82 | | 113.82 | | 125.32 | |
| Terminal Voltage | volts DC | 24 | 36 | 48 | 24 | 36 | 48 | 24 | 36 | 48 | 24 | 36 | 48 |
| Peak Torque | oz-in | 35 | 35 | 35 | 88 | 88 | 88 | 143 | 143 | 143 | 186 | 186 | 186 |
| | Nm | 0.2472 | 0.2472 | 0.2472 | 0.6214 | 0.6214 | 0.6214 | 1.0098 | 1.0098 | 1.0098 | 1.3134 | 1.3134 | 1.3134 |
| Continuous Stall Torque | oz-in | 14.6 | 17.7 | 14.2 | 30.7 | 31.4 | 35.2 | 42.8 | 44.7 | 42.9 | 50.4 | 54.3 | 53.2 |
| | Nm | 0.103 | 0.125 | 0.100 | 0.217 | 0.221 | 0.248 | 0.303 | 0.315 | 0.303 | 0.356 | 0.384 | 0.376 |
| No-Load Speed | | 12,200 | 12,500 | 12,300 | 9,100 | 9,700 | 10,200 | 8,100 | 8,800 | 8,200 | 7,300 | 7,500 | 8,100 |
| Rated Speed | RPM | 8650 | 9060 | 9190 | 6460 | 7000 | 7130 | 6060 | 6700 | 6250 | 5340 | 5590 | 6140 |
| | rad/sec | 906 | 949 | 962 | 676 | 733 | 747 | 635 | 702 | 655 | 559 | 585 | 643 |
| Rated Torque | oz-in | 14.2 | 16.1 | 12.1 | 29.7 | 29.8 | 32.9 | 40.3 | 42.3 | 41.8 | 49.1 | 51.9 | 48.8 |
| | Nm | 0.100 | 0.114 | 0.085 | 0.210 | 0.210 | 0.232 | 0.285 | 0.299 | 0.295 | 0.347 | 0.366 | 0.345 |
| Rated Current | Amps | 5.80 | 4.30 | 2.38 | 7.75 | 5.43 | 4.88 | 9.47 | 7.44 | 5.00 | 10.45 | 7.66 | 5.85 |
| Rated Power | watts | 91 | 108 | 82 | 142 | 154 | 174 | 181 | 210 | 193 | 194 | 215 | 222 |
| Torque Sensitivity | oz-in/amp | 2.55 | 3.78 | 5.18 | 3.40 | 4.90 | 6.25 | 3.85 | 5.35 | 7.79 | 4.26 | 6.30 | 7.80 |
| | Nm/amp | 0.018 | 0.027 | 0.037 | 0.024 | 0.035 | 0.044 | 0.027 | 0.038 | 0.055 | 0.030 | 0.044 | 0.055 |
| Back EMF | volts/KRPM | 1.89 | 2.80 | 3.83 | 2.51 | 3.62 | 4.62 | 2.85 | 3.96 | 5.76 | 3.15 | 4.66 | 5.77 |
| | volts/rad/sec | 0.018 | 0.027 | 0.037 | 0.024 | 0.035 | 0.044 | 0.027 | 0.038 | 0.055 | 0.030 | 0.044 | 0.055 |
| Terminal Resistance | ohms | 0.465 | 0.939 | 1.890 | 0.246 | 0.507 | 0.800 | 0.178 | 0.347 | 0.715 | 0.181 | 0.366 | 0.576 |
| Terminal Inductance | mH | 0.350 | 0.758 | 1.53 | 0.275 | 0.580 | 0.930 | 0.220 | 0.420 | 0.900 | 0.230 | 0.490 | 0.770 |
| Motor Constant | oz-in/sq.rt.watt | 3.74 | 3.90 | 3.77 | 6.86 | 6.88 | 6.99 | 9.13 | 9.08 | 9.21 | 10.01 | 10.41 | 10.28 |
| | Nm/sq.rt.watt | 0.026 | 0.028 | 0.027 | 0.048 | 0.049 | 0.049 | 0.064 | 0.064 | 0.065 | 0.071 | 0.074 | 0.073 |
| Rotor Inertia | oz-in-sec ² x 10 ⁻³ | 0.51 | 0.51 | 0.51 | 0.99 | 0.99 | 0.99 | 1.5 | 1.5 | 1.5 | 1.9 | 1.9 | 1.9 |
| | g-cm ² | 36 | 36 | 36 | 70 | 70 | 70 | 106 | 106 | 106 | 134 | 134 | 134 |
| Weight | oz | 8.3 | 8.4 | 8.3 | 13.6 | 13.7 | 13.8 | 19.1 | 19.1 | 19.1 | 24.4 | 24.7 | 24.5 |
| | g | 234.0 | 238.0 | 234.0 | 386.0 | 389.0 | 391.0 | 542.0 | 542.0 | 542.0 | 693.0 | 699.0 | 694.0 |
| # of Poles | | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 |
| Timing | | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° |
| Mech. Time Constant | ms | 5.20 | 4.7 | 5.1 | 3.0 | 3.0 | 2.9 | 2.5 | 2.6 | 2.5 | 2.7 | 2.5 | 2.5 |
| Electrical Time Constant | ms | 0.75 | 0.81 | 0.81 | 1.12 | 1.14 | 1.16 | 1.24 | 1.21 | 1.26 | 1.27 | 1.34 | 1.34 |
| Thermal Resistivity | deg. C/watt | 2.28 | 2.34 | 3.44 | 2.49 | 2.67 | 1.81 | 2.36 | 1.89 | 2.35 | 1.93 | 1.80 | 1.86 |
| Speed/Torque Gradient | rpm/oz-in | 250.0 | 213.7 | 257.0 | 88.9 | 90.6 | 93.3 | 50.6 | 49.6 | 46.7 | 39.9 | 36.8 | 40.2 |

Notes:

1. Motor mounted to a 6" x 6" x 1/4" aluminum plate, still air.
 2. Maximum winding temperature of 155°C.
 3. Typical electrical specifications at 25°C.
 4. Motor Terminal Voltages are representative only; motors may be operated at voltages other than those listed in the table. For assistance please contact our applications engineer.
 5. Calculated (theoretical) speed/torque gradient.
 6. For MS (military style) connector, please specify connector housing and terminal.
 7. Data for informational purposes only. Should not be considered a binding performance agreement.
- For specific applications, please contact the factory.


*Many other custom mechanical options are available – consult factory.

**Many other winding options are available – consult factory.

Select your options below and place their code in its corresponding block as shown on page 5.

| | | |
|----------------------|---------------------------|------------------------|
| T TERMINATION | F FEEDBACK OPTIONS | O OTHER OPTIONS |
| L – Leads (std) | H – Hall Effect (std) | G – Gearhead |
| C – Connector | | |
| M – MS connector | | |

BN23 IP65 Typical Outline

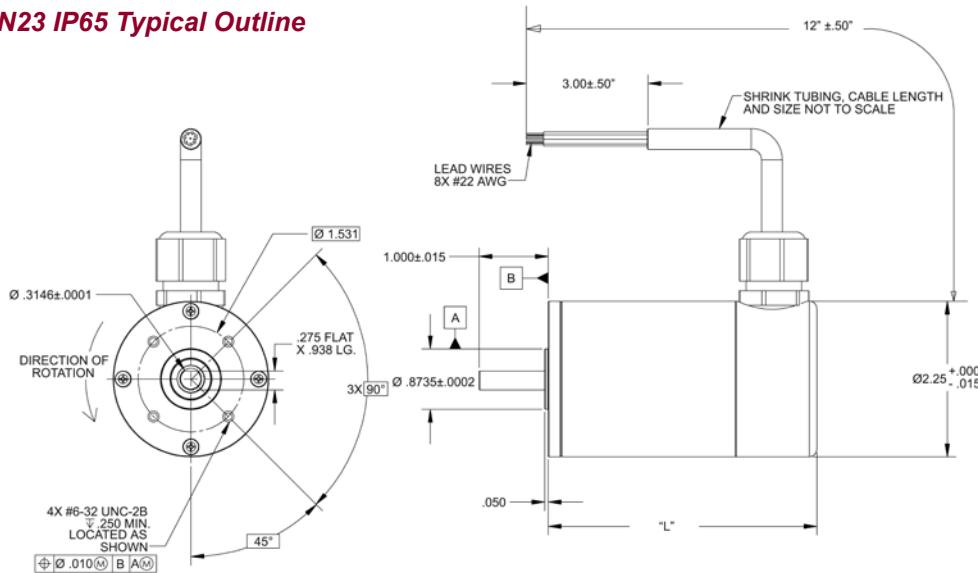

Termination Table*

| COLOR | CONNECTION |
|--------|----------------------|
| VIOLET | A COIL |
| GREEN | C COIL |
| BLACK | B COIL |
| GRAY | HALL GND |
| YELLOW | HALL V _{CC} |
| WHITE | HALL S3 |
| BLUE | HALL S2 |
| BROWN | HALL S1 |


*We reserve the right to use solid color wires or white wires with color trace.

Dimensions are in inches


BN23 IP65 Performance Curves

BN23 IP65 Performance Curves


BN23-13IP-01: Continuous & Intermittent Operation at 24 VDC

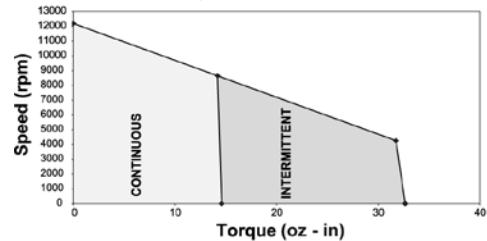


BN23-13IP-02: Continuous & Intermittent Operation at 36 VDC

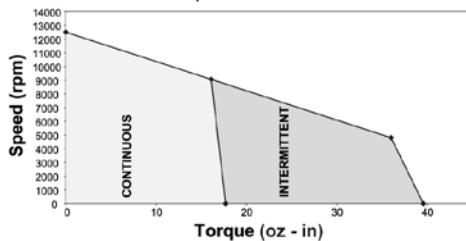


BN23-13IP-03: Continuous & Intermittent Operation at 48 VDC

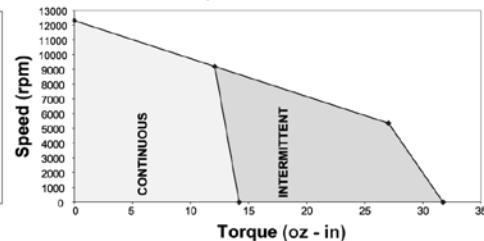


BN23-18IP-01: Continuous & Intermittent Operation at 24 VDC

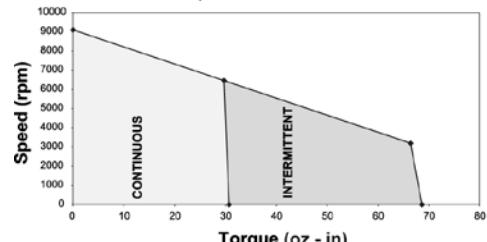


BN23-18IP-02: Continuous & Intermittent Operation at 36 VDC

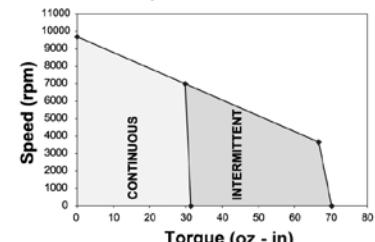


BN23-18IP-03: Continuous & Intermittent Operation at 48 VDC

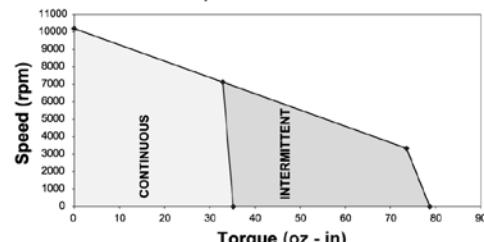


BN23-23IP-01: Continuous & Intermittent Operation at 24 VDC

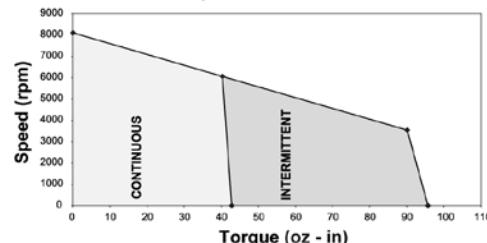


BN23-23IP-02: Continuous & Intermittent Operation at 36 VDC

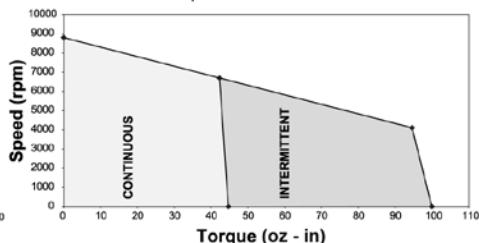


BN23-23IP-03: Continuous & Intermittent Operation at 48 VDC

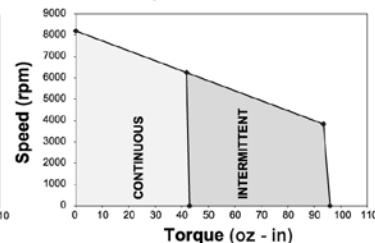


BN23-28IP-01: Continuous & Intermittent Operation at 24 VDC

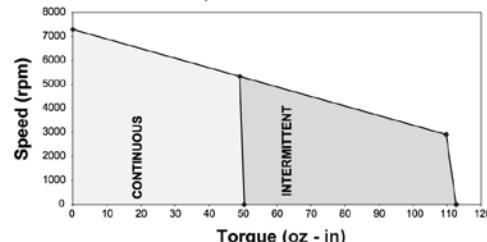

BN23-28IP-02: Continuous & Intermittent Operation at 36 VDC

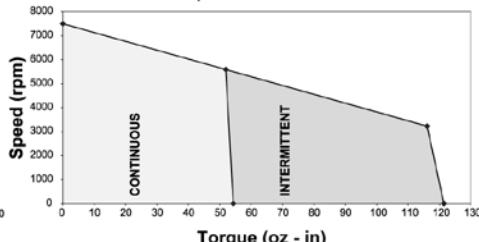

BN23-28IP-03: Continuous & Intermittent Operation at 48 VDC

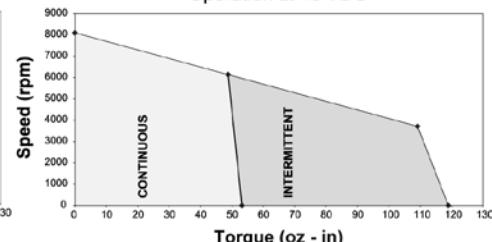

Note: Intermittent operation is based on a 20% duty cycle of one minute on, four minutes off.
Please contact the factory regarding the duty cycle of your application.

BN28 Specifications

BN28 SPECIFICATIONS -

*Continuous Stall Torque 43 - 108 oz-in (0.30 - 0.76 Nm)
 Peak Torque 188 - 737 oz-in (1.33 - 5.2 Nm)*

| Part Number* | | BN28-21AF- <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> T <input type="checkbox"/> F <input type="checkbox"/> | | | BN28-29AF- <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> T <input type="checkbox"/> F <input type="checkbox"/> | | | BN28-36AF- <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> T <input type="checkbox"/> F <input type="checkbox"/> | | | BN28-44AF- <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> T <input type="checkbox"/> F <input type="checkbox"/> | | |
|--------------------------|---|--|--------|--------|--|--------|--------|--|--------|---------|--|---------|---------|
| Winding Code** | | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 |
| L = Length | inches | 2.10 | | | 2.90 | | | 3.60 | | | 4.40 | | |
| | millimeters | 53.3 | | | 73.7 | | | 91.4 | | | 111.8 | | |
| Terminal Voltage | volts DC | 24.0 | 48.0 | 72.0 | 24.0 | 48.0 | 72.0 | 24.0 | 48.0 | 72.0 | 24.0 | 48.0 | 72.0 |
| Peak Torque | oz-in | 188.0 | 188.0 | 188.0 | 407.0 | 407.0 | 407.0 | 596.0 | 596.0 | 596.0 | 737.0 | 737.0 | 737.0 |
| | Nm | 1.3276 | 1.3276 | 1.3276 | 2.8740 | 2.8740 | 2.8740 | 4.2087 | 4.2087 | 4.2087 | 5.2043 | 5.2043 | 5.2043 |
| Continuous Stall Torque | oz-in | 43.0 | 44.0 | 46.0 | 71.0 | 74.0 | 72.0 | 93.0 | 95.0 | 93.0 | 106.0 | 108.0 | 105.0 |
| | Nm | 0.3036 | 0.3107 | 0.3248 | 0.5014 | 0.5226 | 0.5084 | 0.6567 | 0.6708 | 0.6567 | 0.7485 | 0.7626 | 0.7415 |
| Rated Speed | RPM | 9170 | 9230 | 9240 | 8870 | 8900 | 7890 | 5890 | 5910 | 5230 | 4660 | 4680 | 4120 |
| | rad/sec | 960 | 967 | 968 | 929 | 932 | 826 | 617 | 619 | 548 | 488 | 490 | 431 |
| Rated Torque | oz-in | 31 | 31 | 33 | 40 | 40 | 46 | 68 | 70 | 72 | 84 | 84 | 86 |
| | Nm | 0.2189 | 0.2189 | 0.2330 | 0.2825 | 0.2825 | 0.3248 | 0.4802 | 0.4943 | 0.5084 | 0.5932 | 0.5932 | 0.6073 |
| Rated Current | Amps | 10.26 | 5.13 | 3.63 | 12.67 | 6.33 | 4.29 | 14.31 | 7.35 | 4.51 | 14.25 | 7.13 | 4.35 |
| Rated Power | watts | 210.3 | 211.6 | 225.5 | 262.4 | 263.3 | 268.4 | 296.2 | 306.0 | 278.5 | 289.5 | 290.8 | 262.1 |
| Torque Sensitivity | oz-in/amp | 3.24 | 6.49 | 9.73 | 3.48 | 6.95 | 11.59 | 5.07 | 10.13 | 16.89 | 6.25 | 12.50 | 20.84 |
| | Nm/amp | 0.0229 | 0.0458 | 0.0687 | 0.0246 | 0.0491 | 0.0818 | 0.0358 | 0.0715 | 0.1193 | 0.0441 | 0.0883 | 0.1472 |
| Back EMF | volts/KRPM | 2.40 | 4.80 | 7.20 | 2.57 | 5.14 | 8.57 | 3.75 | 7.49 | 12.49 | 6.79 | 9.24 | 15.41 |
| | volts/rad/sec | 0.0229 | 0.0458 | 0.0687 | 0.0246 | 0.0491 | 0.0818 | 0.0358 | 0.0715 | 0.1193 | 0.048 | 0.0883 | 0.1472 |
| Terminal Resistance | ohms | 0.14 | 0.51 | 1.08 | 0.087 | 0.25 | 0.72 | 0.10 | 0.36 | 1.05 | 0.147 | 0.47 | 1.38 |
| Terminal Inductance | mH | 0.18 | 0.72 | 1.62 | 0.11 | 0.43 | 1.19 | 0.17 | 0.69 | 1.92 | 0.24 | 0.97 | 2.69 |
| Motor Constant | oz-in/sq.rt.watt | 8.72 | 9.06 | 9.38 | 13.44 | 13.93 | 13.69 | 16.45 | 16.86 | 16.49 | 17.82 | 18.18 | 17.73 |
| | Nm/sq.rt.watt | 0.062 | 0.064 | 0.066 | 0.095 | 0.098 | 0.097 | 0.116 | 0.119 | 0.11645 | 0.12584 | 0.12835 | 0.12518 |
| Rotor Inertia | oz-in-sec ² x 10 ⁻³ | 2.30 | 2.30 | 2.30 | 4.40 | 4.40 | 4.40 | 6.60 | 6.60 | 6.60 | 8.80 | 8.80 | 8.80 |
| | g-cm ² | 162.3 | 162.3 | 162.3 | 310.5 | 310.5 | 310.5 | 465.8 | 465.8 | 465.8 | 621.0 | 621.0 | 621.0 |
| Weight | oz | 23.0 | 23.0 | 23.0 | 35.0 | 35.0 | 35.0 | 48.0 | 48.0 | 48.0 | 61.0 | 61.0 | 61.0 |
| | g | 653.2 | 653.2 | 653.2 | 994.0 | 994.0 | 994.0 | 1363.2 | 1363.2 | 1363.2 | 1732.4 | 1732.4 | 1732.4 |
| # of Poles | | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 |
| Timing | | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° |
| Mech. Time Constant | ms | 4.3 | 4.0 | 3.7 | 3.4 | 3.2 | 3.3 | 3.5 | 3.3 | 3.4 | 3.9 | 3.8 | 4.0 |
| Electrical Time Constant | ms | 1.30 | 1.40 | 1.51 | 1.64 | 1.73 | 1.66 | 1.79 | 1.91 | 1.83 | 1.95 | 2.05 | 1.95 |
| Thermal Resistivity | deg. C/watt | 2.9 | 3.0 | 2.9 | 2.5 | 2.6 | 2.6 | 2.2 | 2.2 | 2.3 | 2.0 | 2.0 | 2.1 |
| Speed/Torque Gradient | rpm/oz-in | 47 | 47 | 47 | 25 | 25 | 25 | 20 | 20 | 20 | 13 | 13 | 13 |

Notes:

1. Motor mounted to a 10 x 10 x 1/4 inches aluminum plate, still air.
2. Maximum winding temperature of 155°C.
3. Typical electrical specifications at 25°C.
4. Motor Terminal Voltages are representative only; motors may be operated at voltages other than those listed in the table. For assistance please contact our applications engineer.
5. For MS (military style) connector, please specify connector housing and terminal.
6. Data for informational purposes only. Should not be considered a binding performance agreement. For specific applications, please contact the factory.

*Many other custom mechanical options are available – consult factory.

**Many other winding options are available – consult factory.

Select your options below and place their code in its corresponding block as shown on page 5.

T TERMINATION

- L – Leads (std)
 C – Connector
 M – MS connector

F FEEDBACK OPTIONS


- H – Hall Effect (std)
 R – Resolver
 S – Sensorless

OTHER OPTIONS

- E – Encoder
 G – Gearhead

BN28 Housed / Frameless

BN28 Typical Outline - Housed

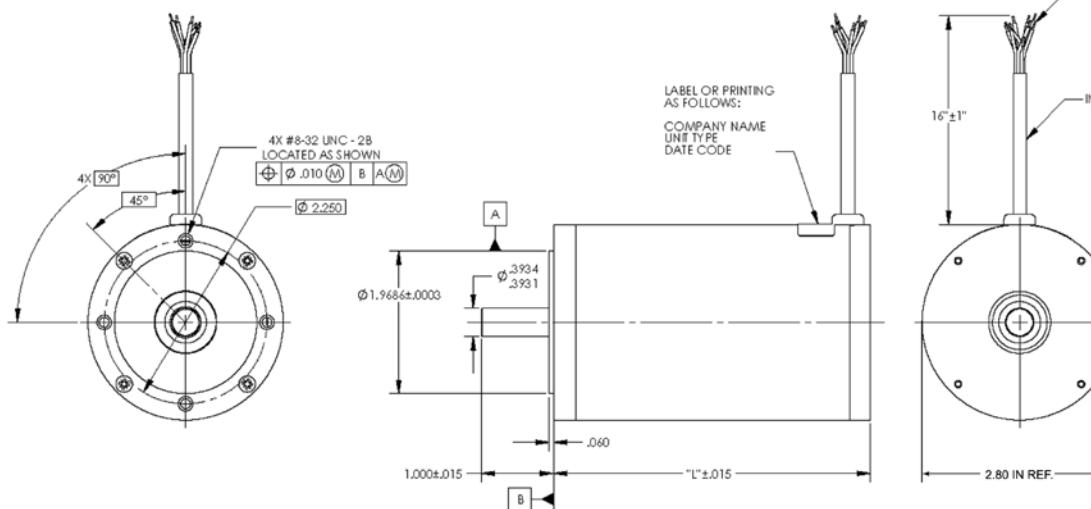


Termination Table

| PIN COLOR | CONNECTION |
|-----------|------------|
| YELLOW | V_{CC} |
| GRAY | GROUND |
| RED | A COIL |
| BLACK | B COIL |
| GREEN | C COIL |
| BLUE | S2 OUT |
| BROWN | S1 OUT |
| ORANGE | S3 OUT |

Dimensions are in inches

BN28 Typical Outline - Frameless

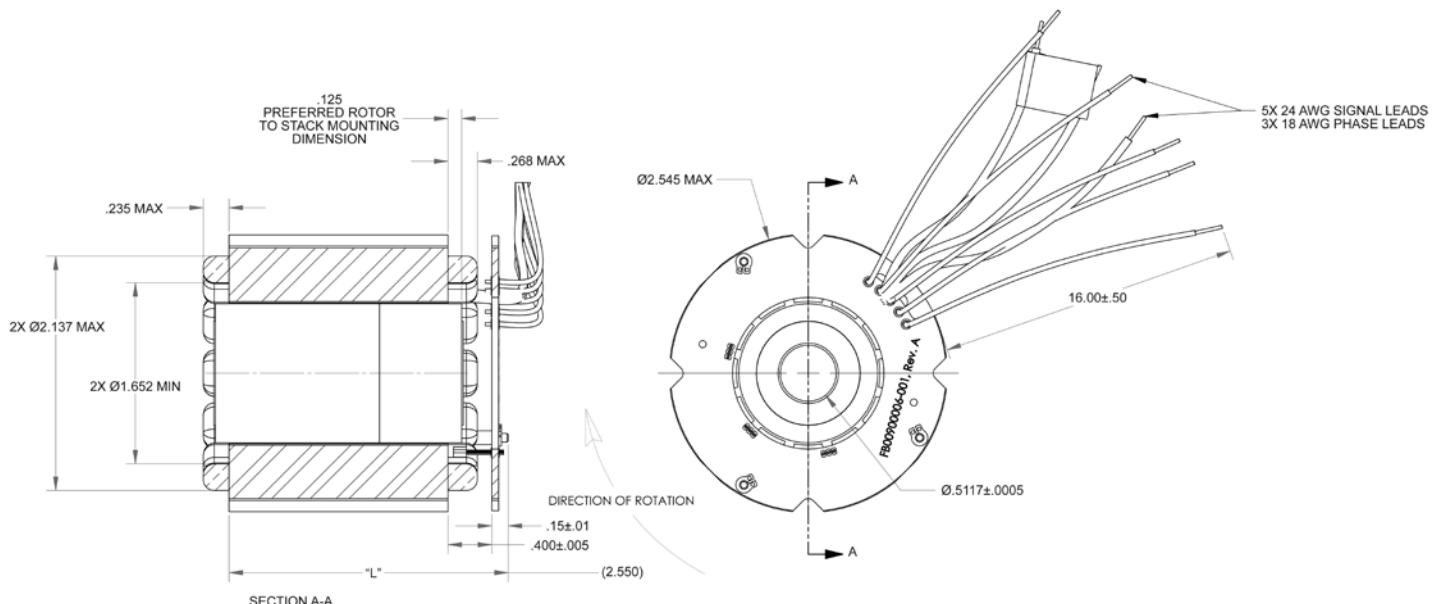


| PART NUMBER | "L" |
|----------------|-------|
| BN28-21ZP-XXLH | 1.050 |
| BN28-29ZP-XXLH | 1.80 |
| BN28-36ZP-XXLH | 2.550 |
| BN28-44ZP-XXLH | 3.300 |

Dimensions are in inches

Note: For electrical performance see page 24.

BN28 Performance Curves

BN28 Performance Curves

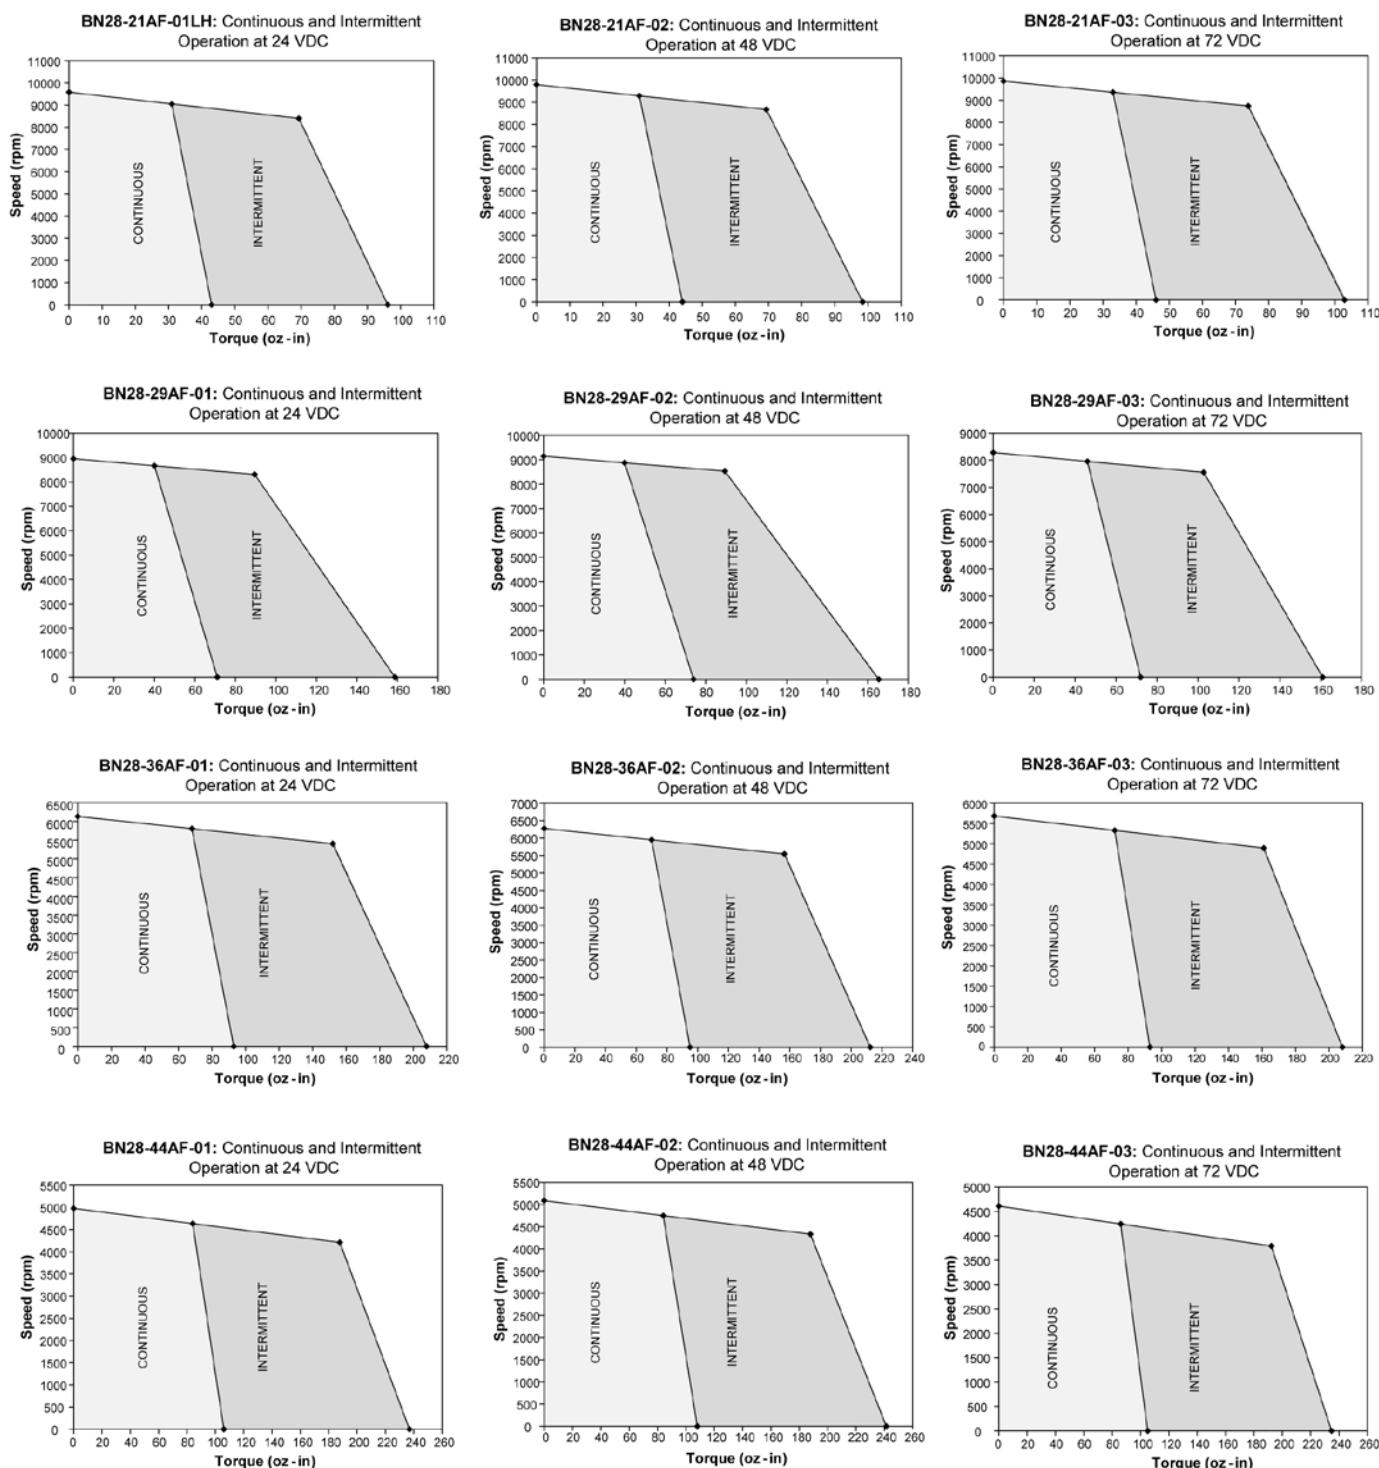

Note: Intermittent operation is based on a 20% duty cycle of one minute on, four minutes off.
Please contact the factory regarding the duty cycle of your application.

BN28 IP65 Specifications

BN28 IP65 SPECIFICATIONS - Continuous Stall Torque 43 - 108 oz-in (0.30 - 0.76 Nm) Peak Torque 188 - 737 oz-in (1.33 - 5.2 Nm)

Inside Rotor
Brushless Motors

| Part Number* | | BN28-21IP - <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> T <input type="checkbox"/> F <input type="checkbox"/> | | | BN28-29IP - <input type="checkbox"/> <input type="checkbox"/> T <input checked="" type="checkbox"/> F <input type="checkbox"/> | | | BN28-36IP - <input type="checkbox"/> <input type="checkbox"/> T <input type="checkbox"/> F <input type="checkbox"/> | | | BN28-44IP - <input type="checkbox"/> <input type="checkbox"/> T <input type="checkbox"/> F <input checked="" type="checkbox"/> | | |
|--------------------------|---|---|--------|--------|--|--------|--------|---|--------|---------|--|---------|---------|
| Winding Code** | | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 |
| L = Length | inches | 2.10 | | | 2.90 | | | 3.60 | | | 4.40 | | |
| | millimeters | 53.3 | | | 73.7 | | | 91.4 | | | 111.8 | | |
| Terminal Voltage | volts DC | 24.0 | 48.0 | 72.0 | 24.0 | 48.0 | 72.0 | 24.0 | 48.0 | 72.0 | 24.0 | 48.0 | 72.0 |
| Peak Torque | oz-in | 188.0 | 188.0 | 188.0 | 407.0 | 407.0 | 407.0 | 596.0 | 596.0 | 596.0 | 737.0 | 737.0 | 737.0 |
| | Nm | 1.3276 | 1.3276 | 1.3276 | 2.8740 | 2.8740 | 2.8740 | 4.2087 | 4.2087 | 4.2087 | 5.2043 | 5.2043 | 5.2043 |
| Continuous Stall Torque | oz-in | 43.0 | 44.0 | 46.0 | 71.0 | 74.0 | 72.0 | 93.0 | 95.0 | 93.0 | 106.0 | 108.0 | 105.0 |
| | Nm | 0.3036 | 0.3107 | 0.3248 | 0.5014 | 0.5226 | 0.5084 | 0.6567 | 0.6708 | 0.6567 | 0.7485 | 0.7626 | 0.7415 |
| Rated Speed | RPM | 9170 | 9230 | 9240 | 8870 | 8900 | 7890 | 5890 | 5910 | 5230 | 4660 | 4680 | 4120 |
| | rad/sec | 960 | 967 | 968 | 929 | 932 | 826 | 617 | 619 | 548 | 488 | 490 | 431 |
| Rated Torque | oz-in | 31 | 31 | 33 | 40 | 40 | 46 | 68 | 70 | 72 | 84 | 84 | 86 |
| | Nm | 0.2189 | 0.2189 | 0.2330 | 0.2825 | 0.2825 | 0.3248 | 0.4802 | 0.4943 | 0.5084 | 0.5932 | 0.5932 | 0.6073 |
| Rated Current | Amps | 10.26 | 5.13 | 3.63 | 12.67 | 6.33 | 4.29 | 14.31 | 7.35 | 4.51 | 14.25 | 7.13 | 4.35 |
| Rated Power | watts | 210.3 | 211.6 | 225.5 | 262.4 | 263.3 | 268.4 | 296.2 | 306.0 | 278.5 | 289.5 | 290.8 | 262.1 |
| Torque Sensitivity | oz-in/amp | 3.24 | 6.49 | 9.73 | 3.48 | 6.95 | 11.59 | 5.07 | 10.13 | 16.89 | 6.79 | 12.50 | 20.84 |
| | Nm/amp | 0.0229 | 0.0458 | 0.0687 | 0.0246 | 0.0491 | 0.0818 | 0.0358 | 0.0715 | 0.1193 | 0.048 | 0.0883 | 0.1472 |
| Back EMF | volts/KRPM | 2.40 | 4.80 | 7.20 | 2.57 | 5.14 | 8.57 | 3.75 | 7.49 | 12.49 | 5.02 | 9.24 | 15.41 |
| | volts/rad/sec | 0.0229 | 0.0458 | 0.0687 | 0.0246 | 0.0491 | 0.0818 | 0.0358 | 0.0715 | 0.1193 | 0.048 | 0.0883 | 0.1472 |
| Terminal Resistance | ohms | 0.14 | 0.51 | 1.08 | 0.087 | 0.25 | 0.72 | 0.10 | 0.36 | 1.05 | 0.147 | 0.47 | 1.38 |
| Terminal Inductance | mH | 0.18 | 0.72 | 1.62 | 0.11 | 0.43 | 1.19 | 0.17 | 0.69 | 1.92 | 0.24 | 0.97 | 2.69 |
| Motor Constant | oz-in/sq.rt.watt | 8.72 | 9.06 | 9.38 | 13.44 | 13.93 | 13.69 | 16.45 | 16.86 | 16.49 | 17.82 | 18.18 | 17.73 |
| | Nm/sq.rt.watt | 0.062 | 0.064 | 0.066 | 0.095 | 0.098 | 0.097 | 0.116 | 0.119 | 0.11645 | 0.12584 | 0.12835 | 0.12518 |
| Rotor Inertia | oz-in-sec ² x 10 ⁻³ | 2.30 | 2.30 | 2.30 | 4.40 | 4.40 | 4.40 | 6.60 | 6.60 | 6.60 | 8.80 | 8.80 | 8.80 |
| | g-cm ² | 162.3 | 162.3 | 162.3 | 310.5 | 310.5 | 310.5 | 465.8 | 465.8 | 465.8 | 621.0 | 621.0 | 621.0 |
| Weight | oz | 23.0 | 23.0 | 23.0 | 35.0 | 35.0 | 35.0 | 48.0 | 48.0 | 48.0 | 61.0 | 61.0 | 61.0 |
| | g | 653.2 | 653.2 | 653.2 | 994.0 | 994.0 | 994.0 | 1363.2 | 1363.2 | 1363.2 | 1732.4 | 1732.4 | 1732.4 |
| # of Poles | | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 |
| Timing | | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° |
| Mech. Time Constant | ms | 4.3 | 4.0 | 3.7 | 3.4 | 3.2 | 3.3 | 3.5 | 3.3 | 3.4 | 3.9 | 3.8 | 4.0 |
| Electrical Time Constant | ms | 1.30 | 1.40 | 1.51 | 1.64 | 1.73 | 1.66 | 1.79 | 1.91 | 1.83 | 1.95 | 2.05 | 1.95 |
| Thermal Resistivity | deg. C/watt | 2.9 | 3.0 | 2.9 | 2.5 | 2.6 | 2.6 | 2.2 | 2.2 | 2.3 | 2.0 | 2.0 | 2.1 |
| Speed/Torque Gradient | rpm/oz-in | 47 | 47 | 47 | 25 | 25 | 25 | 20 | 20 | 20 | 13 | 13 | 13 |

Notes:

1. Motor mounted to a 10 x 10 x 1/4 inches aluminum plate, still air.
 2. Maximum winding temperature of 155°C.
 3. Typical electrical specifications at 25°C.
 4. Motor Terminal Voltages are representative only; motors may be operated at voltages other than those listed in the table. For assistance please contact our applications engineer.
 5. Calculated (theoretical) speed/torque gradient.
 6. For MS (military style) connector, please specify connector housing and terminal.
 7. Data for informational purposes only. Should not be considered a binding performance agreement.
- For specific applications, please contact the factory.

*Many other custom mechanical options are available – consult factory.

**Many other winding options are available – consult factory.

Select your options below and place their code in its corresponding block as shown on page 5.

TERMINATION

- L – Leads (std)
C – Connector
M – MS connector


FEEDBACK OPTIONS

- H – Hall Effect (std)
R – Resolver
S – Sensorless

OTHER OPTIONS

- E – Encoder
G – Gearhead

BN28 IP65 Typical Outline

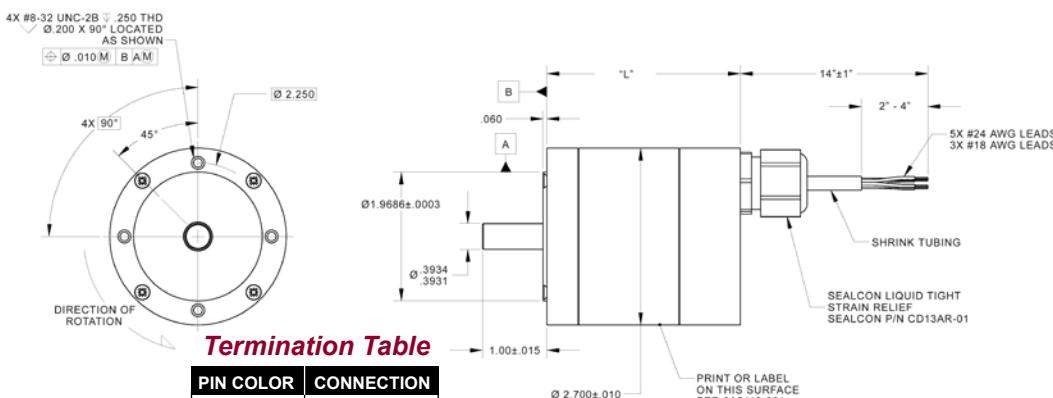













Dimensions are in inches

Termination Table

| PIN COLOR | CONNECTION |
|-----------|-----------------|
| YELLOW | V _{CC} |
| GRAY | GROUND |
| RED | A COIL |
| BLACK | B COIL |
| GREEN | C COIL |
| BLUE | S2 OUT |
| BROWN | S1 OUT |
| ORANGE | S3 OUT |

BN28 IP65 Performance Curves

BN28 IP65 Performance Curves

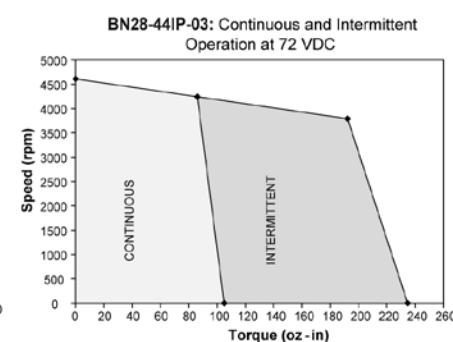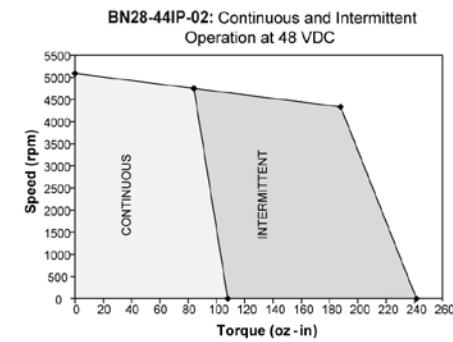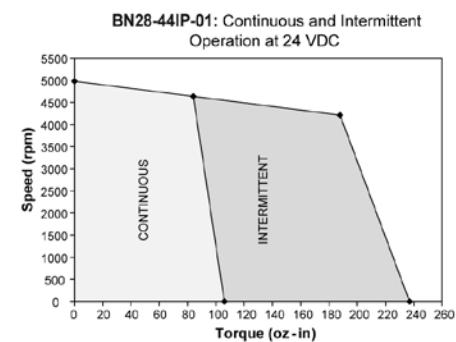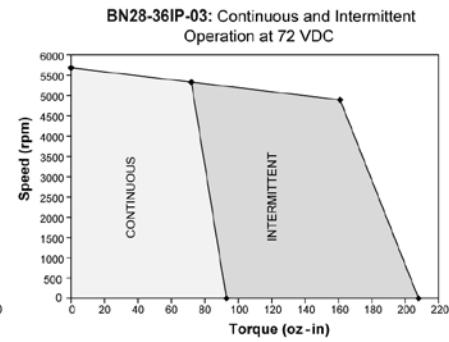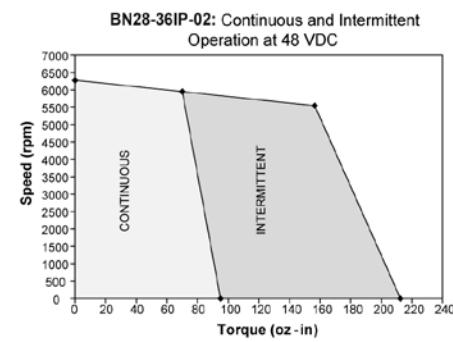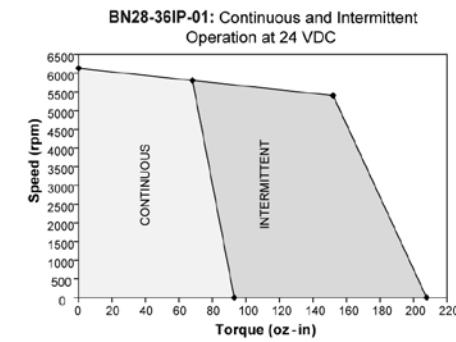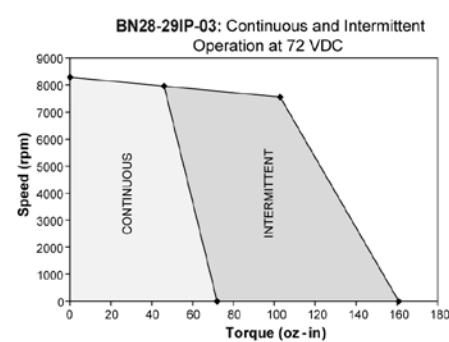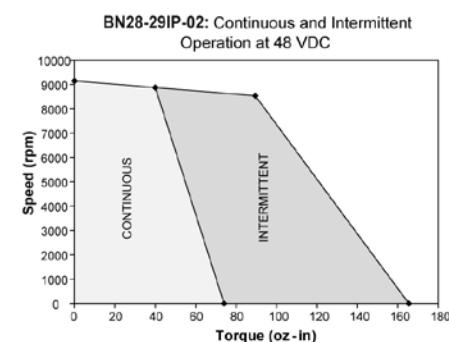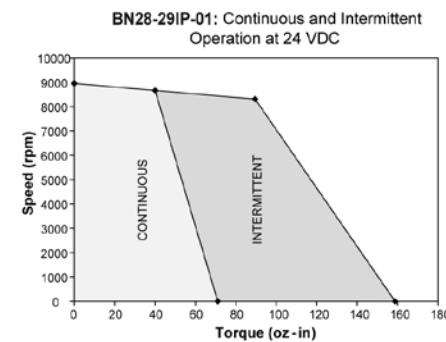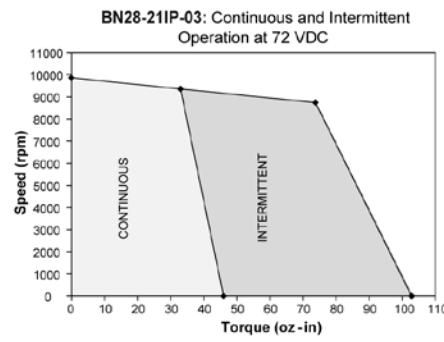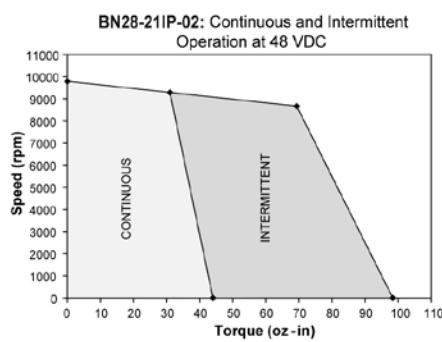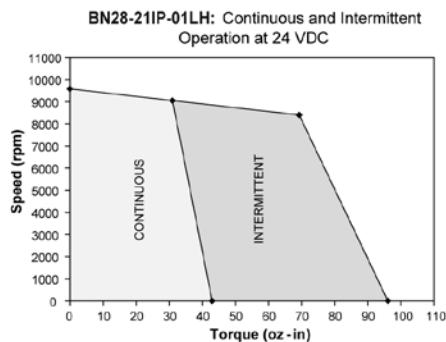

Note: Intermittent operation is based on a 20% duty cycle of one minute on, four minutes off.
Please contact the factory regarding the duty cycle of your application.

BN34 Specifications

BN34 SPECIFICATIONS -

*Continuous Stall Torque 83 - 309 oz-in (0.587 - 2.19 Nm)
 Peak Torque 326 - 1445 oz-in (2.31 - 10.21 Nm)*

| Part Number* | BN34-25AF- <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> | | | BN34-35AF- <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> | | | BN34-45AF- <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> | | | BN34-55AF- <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> | | | |
|--------------------------|---|--------|-------|---|--------|--------|---|-------|-------|---|-------|-------|-------|
| Winding Code** | | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 |
| L = Length | inches | 2.5 | | | 3.5 | | | 4.5 | | | 5.5 | | |
| | millimeters | 63.5 | | | 88.9 | | | 114.3 | | | 139.7 | | |
| Terminal Voltage | volts DC | 24 | 50 | 100 | 24 | 50 | 100 | 24 | 50 | 100 | 24 | 50 | 100 |
| Peak Torque | oz-in | 310 | 310 | 310 | 657 | 643 | 657 | 1006 | 1006 | 1006 | 1375 | 1375 | 1375 |
| | Nm | 2.19 | 2.19 | 2.19 | 4.64 | 4.5405 | 4.64 | 7.11 | 7.11 | 7.11 | 9.71 | 9.71 | 9.71 |
| Continuous Stall Torque | oz-in | 88 | 93 | 90 | 140 | 162 | 172 | 210 | 220 | 236 | 249 | 288 | 299 |
| | Nm | 0.62 | 0.66 | 0.64 | 0.99 | 1.144 | 1.21 | 1.49 | 1.55 | 1.67 | 1.76 | 2.03 | 2.11 |
| Rated Speed | RPM | 8130 | 7500 | 7280 | 6010 | 6400 | 6380 | 3800 | 5170 | 5270 | 2750 | 4350 | 4360 |
| | rad/sec | 851 | 785 | 762 | 629 | 670 | 667 | 397 | 541 | 552 | 288 | 455 | 456 |
| Rated Torque | oz-in | 60 | 64 | 62 | 93 | 106 | 110 | 172 | 148 | 170 | 214 | 208 | 214 |
| | Nm | 0.4237 | 0.45 | 0.44 | 0.6567 | 0.749 | 0.78 | 1.24 | 1.05 | 1.2005 | 1.51 | 1.49 | 1.51 |
| Rated Current | Amps | 16.98 | 8 | 3.77 | 18.74 | 11 | 5.8 | 23.1 | 12.6 | 7 | 21.16 | 14.85 | 7.63 |
| Rated Power | watts | 361 | 355 | 334 | 417 | 502 | 519 | 483 | 567 | 612 | 435 | 669 | 690 |
| Torque Sensitivity | oz-in/amp | 3.78 | 8.5 | 17.48 | 5.06 | 9.92 | 20.26 | 7.76 | 12.42 | 26.39 | 10.5 | 14.7 | 29.39 |
| | Nm/amp | 0.027 | 0.06 | 0.123 | 0.036 | 0.0701 | 0.142 | 0.055 | 0.088 | 0.186 | 0.074 | 0.104 | 0.208 |
| Back EMF | volts/KRPM | 2.79 | 6.29 | 12.92 | 3.74 | 7.34 | 14.98 | 5.74 | 9.18 | 19.51 | 7.76 | 10.87 | 21.73 |
| | volts/rad/sec | 0.027 | 0.06 | 0.123 | 0.036 | 0.07 | 0.143 | 0.055 | 0.088 | 0.186 | 0.074 | 0.104 | 0.208 |
| Terminal Resistance | ohms | 0.079 | 0.253 | 1.12 | 0.05 | 0.147 | 0.548 | 0.068 | 0.141 | 0.557 | 0.088 | 0.131 | 0.487 |
| Terminal Inductance | mH | 0.12 | 0.62 | 2.62 | 0.1 | 0.43 | 1.72 | 0.17 | 0.43 | 1.94 | 0.23 | 0.44 | 1.78 |
| Motor Constant | oz-in/sq.rt.watt | 13.44 | 16.11 | 16.51 | 22.63 | 25.87 | 27.37 | 29.75 | 33.06 | 35.36 | 35.4 | 40.61 | 42.11 |
| | Nm/sq.rt.watt | 0.11 | 0.11 | 0.12 | 0.16 | 0.183 | 0.19 | 0.22 | 0.23 | 0.25 | 0.25 | 0.29 | 0.3 |
| Rotor Inertia | oz-in-sec ² x 10 ⁻³ | 7.2 | 7.2 | 7.2 | 14.1 | 12 | 14 | 21 | 21 | 21 | 28 | 28 | 28 |
| | g-cm ² | 510 | 510 | 510 | 1000 | 846.8 | 1000 | 1500 | 1500 | 1500 | 2000 | 2000 | 2000 |
| Weight | oz | 36 | 37 | 36 | 62 | 62 | 62 | 87 | 89 | 89 | 114 | 116 | 116 |
| | g | 1020 | 1030 | 1030 | 1750 | 1760.8 | 1770 | 2480 | 2520 | 2530 | 3230 | 3300 | 3.3 |
| # of Poles | | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| Timing | | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° |
| Mech. Time Constant | ms | 3.87 | 3.58 | 3.75 | 3.96 | 2.5 | 2.7 | 3.38 | 2.75 | 2.41 | 3.2 | 2.43 | 2.26 |
| Electrical Time Constant | ms | 2.27 | 2.45 | 2.34 | 2.14 | 2.9 | 3.15 | 2.48 | 3.04 | 3.48 | 2.58 | 3.4 | 3.66 |
| Thermal Resistivity | deg. C/watt | 2.25 | 2.39 | 2.41 | 1.87 | 1.84 | 1.84 | 1.51 | 1.63 | 1.62 | 1.45 | 1.43 | 1.43 |
| Speed/Torque Gradient | rpm/oz-in | 5.3 | 4.3 | 4.3 | 2.8 | 2.8 | 1.8 | 1.1 | 1 | 1 | 0.8 | 0.7 | 0.6 |

Notes:

1. Motor mounted to a 10 x 10 x 1/4 inches aluminum plate, still air.
2. Maximum winding temperature of 155°C.
3. Typical electrical specifications at 25°C.
4. Motor Terminal Voltages are representative only; motors may be operated at voltages other than those listed in the table. For assistance please contact our applications engineer.
5. For MS (military style) connector, please specify connector housing and terminal.
6. Data for informational purposes only. Should not be considered a binding performance agreement. For specific applications, please contact the factory.

*Many other custom mechanical options are available – consult factory.

**Many other winding options are available – consult factory.

Select your options below and place their code in its corresponding block as shown on page 5.

T TERMINATION

- L – Leads (std)
 C – Connector
 M – MS connector

F FEEDBACK OPTIONS


- H – Hall Effect (std)
 R – Resolver
 S – Sensorless

O OTHER OPTIONS

- E – Encoder
 G – Gearhead

BN34 Housed / Frameless


BN34 Typical Outline - Housed

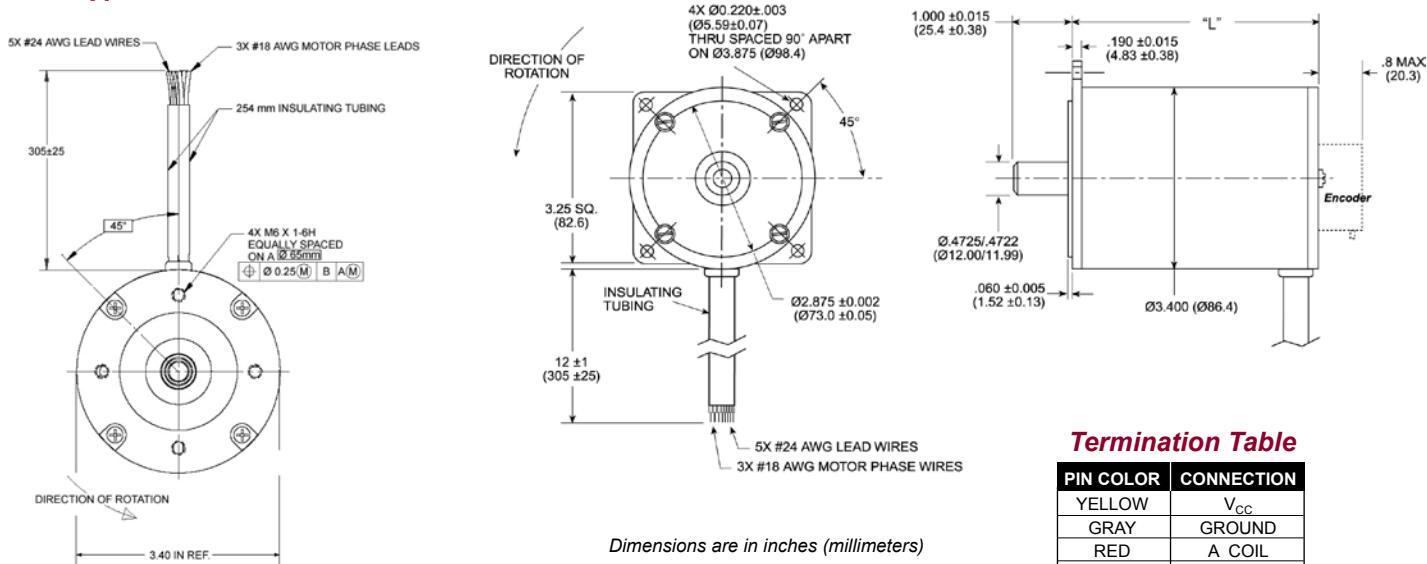

Termination Table

| PIN COLOR | CONNECTION |
|-----------|-----------------|
| YELLOW | V _{CC} |
| GRAY | GROUND |
| RED | A COIL |
| BLACK | B COIL |
| GREEN | C COIL |
| BLUE | S2 OUT |
| BROWN | S1 OUT |
| ORANGE | S3 OUT |

BN34 Typical Outline - Frameless

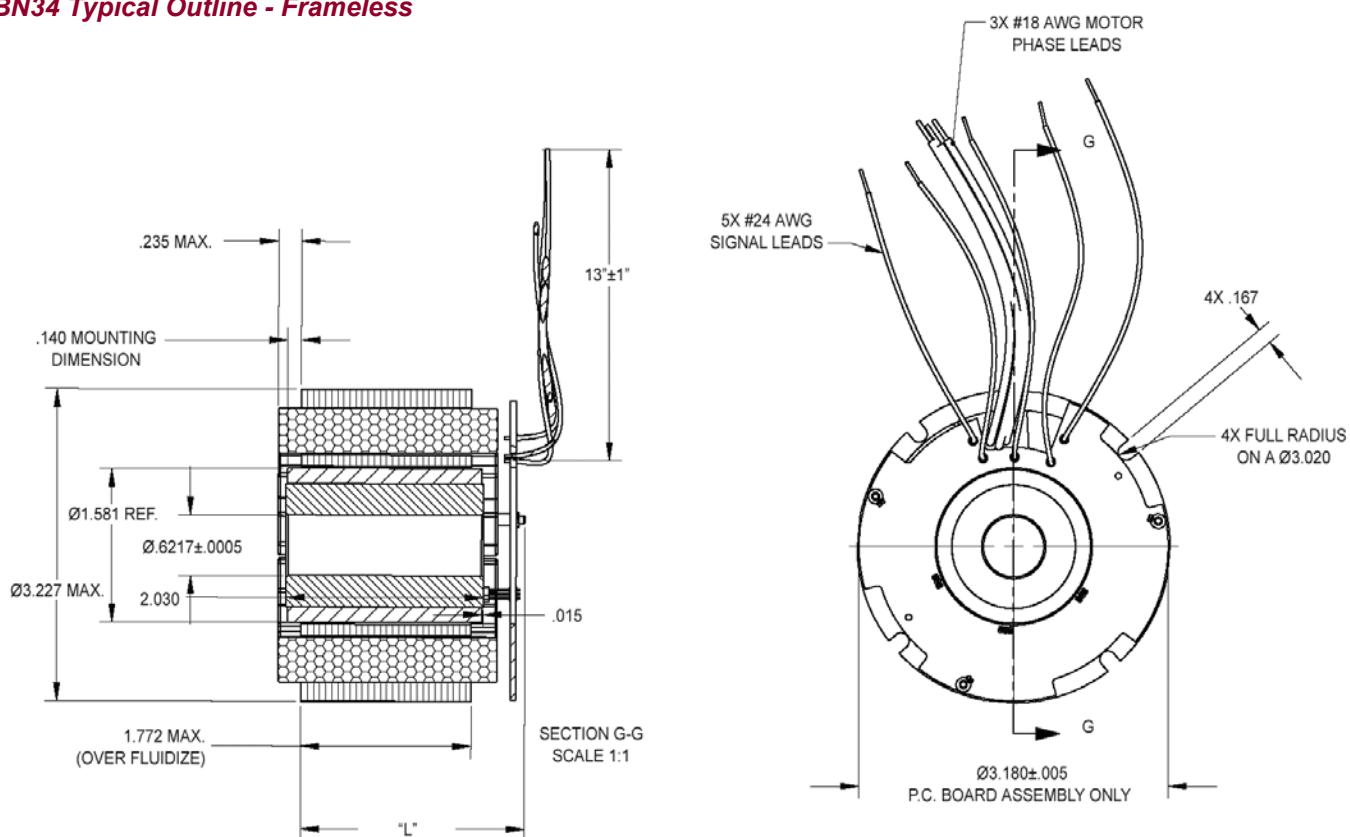


| PART NUMBER | "L" |
|------------------|-------|
| BN34-25ZP-[]-LH | 1.337 |
| BN34-35ZP-[]-LH | 2.337 |
| BN34-45ZP-[]-LH | 3.337 |
| BN34-55ZP-[]-LH | 4.337 |

Note: See page 29 for performance data.

BN34 Performance Curves

BN34 Performance Curves

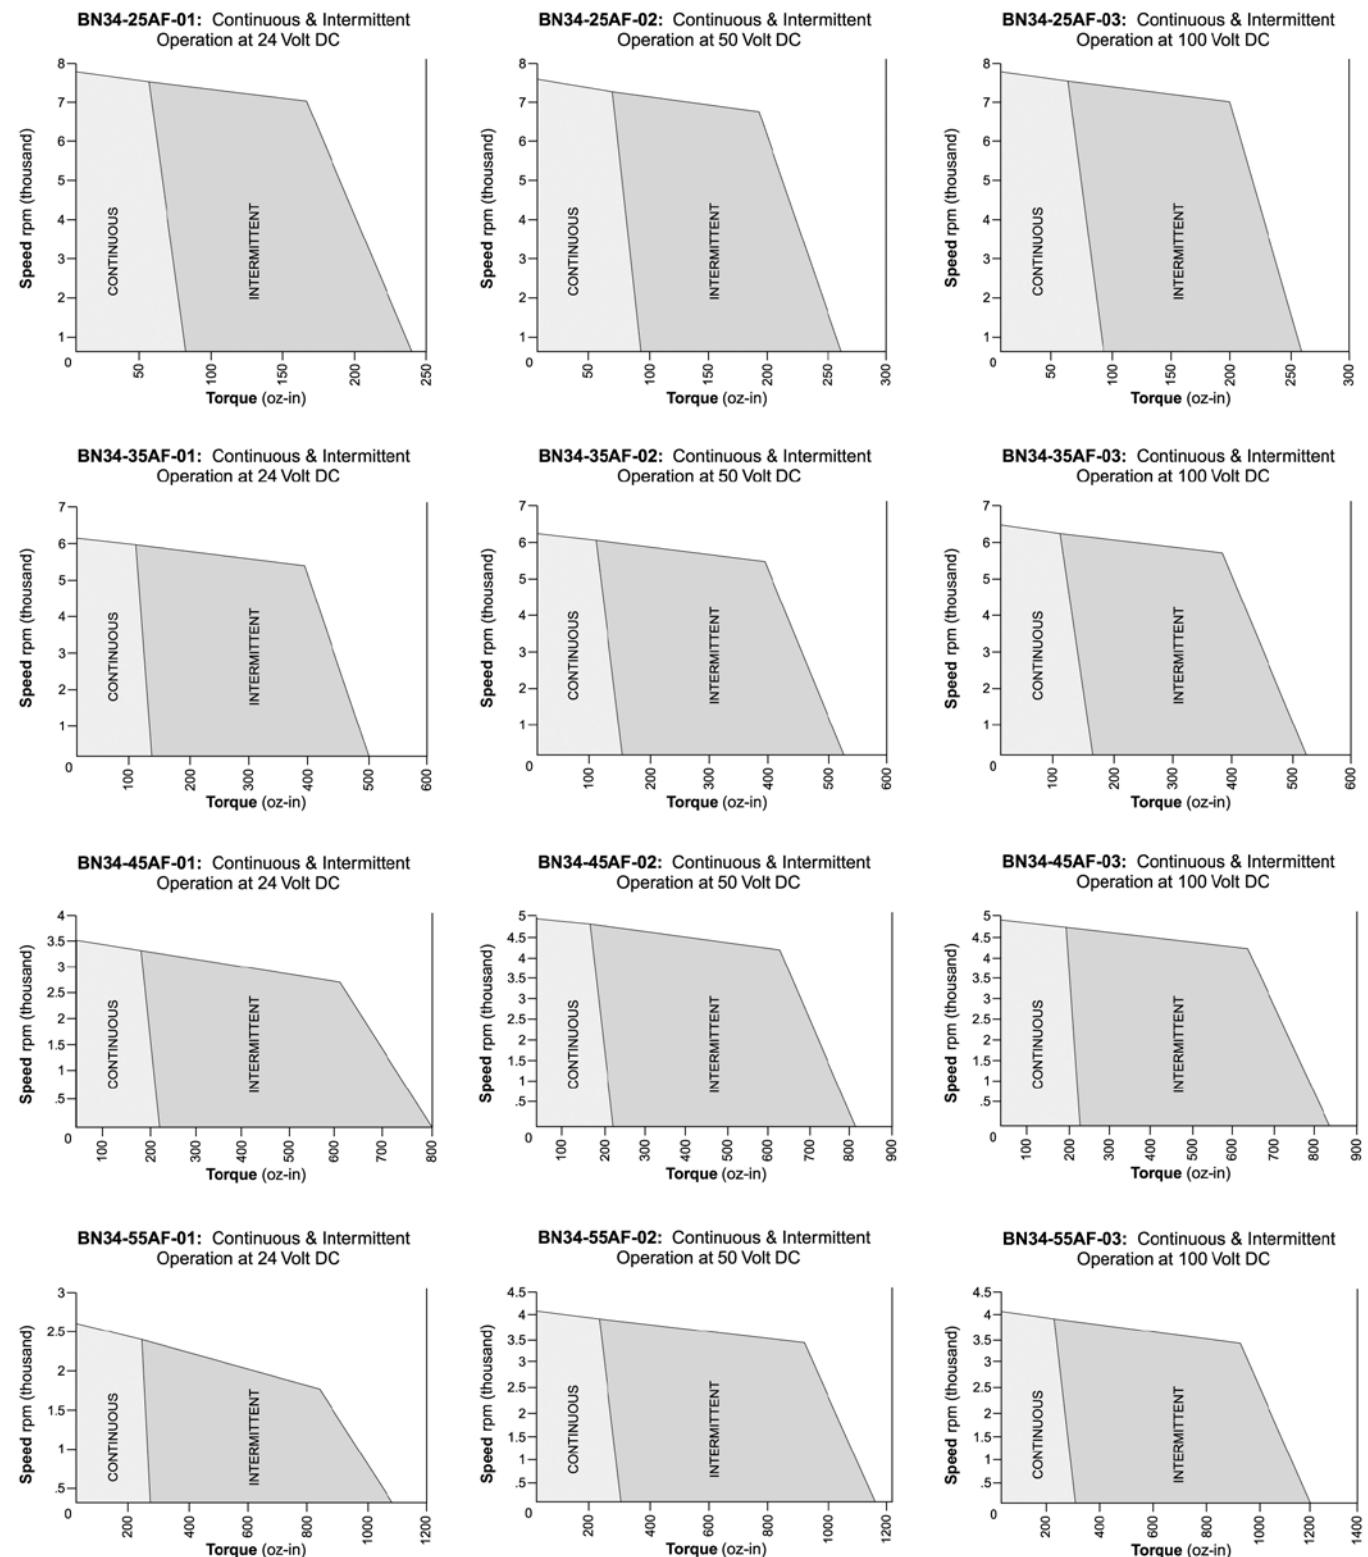

Blue Series Motors
Inside Out Rotors

Note: Intermittent operation is based on a 20% duty cycle of one minute on, four minutes off.
Please contact the factory regarding the duty cycle of your application.

BN34 EU Specifications

BN34 EU SPECIFICATIONS -

*Continuous Stall Torque 83 - 309 oz-in (0.587 - 2.19 Nm)
Peak Torque 326 - 1445 oz-in (2.31 - 10.21 Nm)*

| Part Number* | BN34-25EU- <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> | | | BN34-35EU- <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> | | | BN34-45EU- <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> | | | BN34-55EU- <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> | | | |
|-------------------------|--|--------|-------|--|--------|--------|--|-------|-------|--|-------|-------|-------|
| Winding Code** | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 | |
| L = Length | inches | | 2.5 | 3.5 | | | 4.5 | | | 5.5 | | | |
| | millimeters | | 63.5 | 88.9 | | | 114.3 | | | 139.7 | | | |
| Terminal Voltage | volts DC | 24 | 50 | 100 | 24 | 50 | 100 | 24 | 50 | 100 | 24 | 50 | 100 |
| Peak Torque | oz-in | 310 | 310 | 310 | 657 | 643 | 657 | 1006 | 1006 | 1006 | 1375 | 1375 | 1375 |
| | Nm | 2.19 | 2.19 | 2.19 | 4.64 | 4.5405 | 4.64 | 7.11 | 7.11 | 7.11 | 9.71 | 9.71 | 9.71 |
| Continuous Stall Torque | oz-in | 88 | 93 | 90 | 140 | 162 | 172 | 210 | 220 | 236 | 249 | 288 | 299 |
| | Nm | 0.62 | 0.66 | 0.64 | 0.99 | 1.144 | 1.21 | 1.49 | 1.55 | 1.67 | 1.76 | 2.03 | 2.11 |
| Rated Speed | RPM | 8130 | 7500 | 7280 | 6010 | 6400 | 6380 | 3800 | 5170 | 5270 | 2750 | 4350 | 4360 |
| | rad/sec | 851 | 785 | 762 | 629 | 670 | 667 | 397 | 541 | 552 | 288 | 455 | 456 |
| Rated Torque | oz-in | 60 | 64 | 62 | 93 | 106 | 110 | 172 | 148 | 170 | 214 | 208 | 214 |
| | Nm | 0.4237 | 0.45 | 0.44 | 0.6567 | 0.749 | 0.78 | 1.24 | 1.05 | 1.2005 | 1.51 | 1.49 | 1.51 |
| Rated Current | Amps | 16.98 | 8 | 3.77 | 18.74 | 11 | 5.8 | 23.1 | 12.6 | 7 | 21.16 | 14.85 | 7.63 |
| Rated Power | watts | 361 | 355 | 334 | 417 | 502 | 519 | 483 | 567 | 612 | 435 | 669 | 690 |
| Torque Sensitivity | oz-in/amp | 3.78 | 8.5 | 17.48 | 5.06 | 9.92 | 20.26 | 7.76 | 12.42 | 26.39 | 10.5 | 14.7 | 29.39 |
| | Nm/amp | 0.027 | 0.06 | 0.123 | 0.036 | 0.0701 | 0.142 | 0.055 | 0.088 | 0.186 | 0.074 | 0.104 | 0.208 |
| Back EMF | volts/KRPM | 2.79 | 6.29 | 12.92 | 3.74 | 7.34 | 14.98 | 5.74 | 9.18 | 19.51 | 7.76 | 10.87 | 21.73 |
| | volts/rad/sec | 0.027 | 0.06 | 0.123 | 0.036 | 0.07 | 0.143 | 0.055 | 0.088 | 0.186 | 0.074 | 0.104 | 0.208 |
| Terminal Resistance | ohms | 0.079 | 0.253 | 1.12 | 0.05 | 0.147 | 0.548 | 0.068 | 0.141 | 0.557 | 0.088 | 0.131 | 0.487 |
| Terminal Inductance | mH | 0.12 | 0.62 | 2.62 | 0.1 | 0.43 | 1.72 | 0.17 | 0.43 | 1.94 | 0.23 | 0.44 | 1.78 |
| Motor Constant | oz-in/sq.rt.watt | 13.44 | 16.11 | 16.51 | 22.63 | 25.87 | 27.37 | 29.75 | 33.06 | 35.36 | 35.4 | 40.61 | 42.11 |
| | Nm/sq.rt.watt | 0.11 | 0.11 | 0.12 | 0.16 | 0.183 | 0.19 | 0.22 | 0.23 | 0.25 | 0.25 | 0.29 | 0.3 |
| Rotor Inertia | oz-in-sec ² | 7.2 | 7.2 | 7.2 | 14.1 | 12 | 14 | 21 | 21 | 21 | 28 | 28 | 28 |
| | g-cm ² | 510 | 510 | 510 | 1000 | 846.8 | 1000 | 1500 | 1500 | 1500 | 2000 | 2000 | 2000 |
| Weight | oz | 36 | 37 | 36 | 62 | 62 | 62 | 87 | 89 | 89 | 114 | 116 | 116 |
| | g | 1020 | 1030 | 1030 | 1750 | 1760.8 | 1770 | 2480 | 2520 | 2530 | 3230 | 3300 | 3.3 |

Notes:

1. Motor mounted to a 10 x 10 x 1/4 inches aluminum plate, still air.
2. Maximum winding temperature of 155°C.
3. Typical electrical specifications at 25°C.
4. Motor Terminal Voltages are representative only; motors may be operated at voltages other than those listed in the table. For assistance please contact our applications engineer.
5. For MS (military style) connector, please specify connector housing and terminal.
6. Data for informational purposes only. Should not be considered a binding performance agreement. For specific applications, please contact the factory.

*Many other custom mechanical options are available – consult factory.

**Many other winding options are available – consult factory.


Select your options below and place their code in its corresponding block as shown on page 5.

TERMINATION
L – Leads (std)
C – Connector
M – MS connector

FEEDBACK OPTIONS
H – Hall Effect (std)
R – Resolver
S – Sensorless

OTHER OPTIONS
E – Encoder
G – Gearhead

BN34 EU Typical Outline












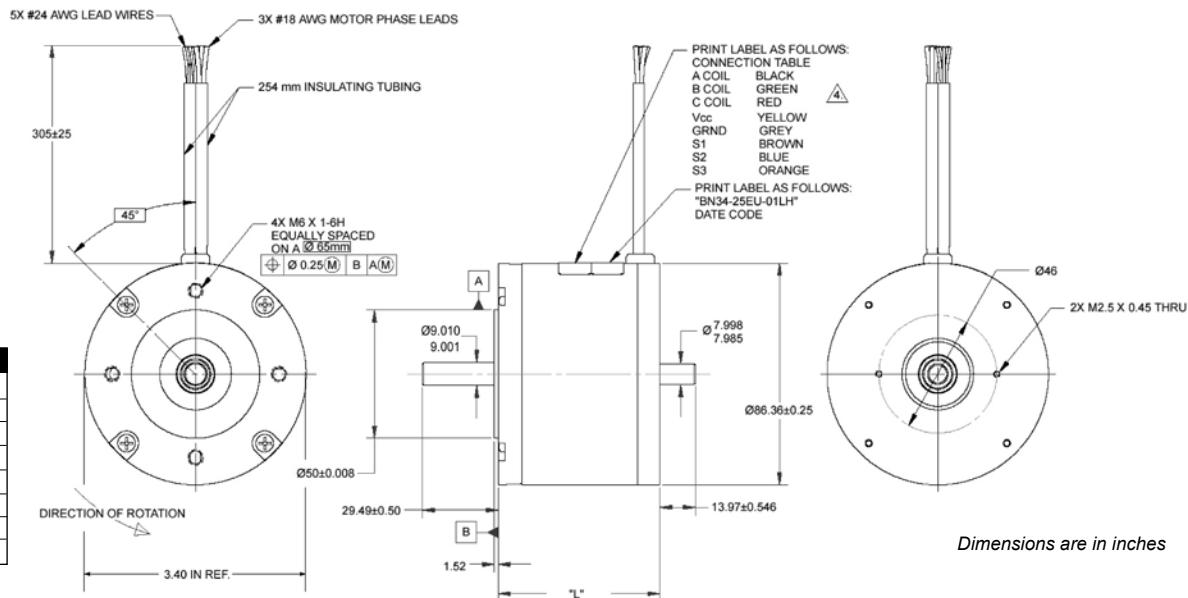


Termination Table

| PIN COLOR | CONNECTION |
|-----------|-----------------|
| YELLOW | V _{cc} |
| GRAY | GROUND |
| RED | A COIL |
| BLACK | B COIL |
| GREEN | C COIL |
| BLUE | S2 OUT |
| BROWN | S1 OUT |
| ORANGE | S3 OUT |

BN34 EU Performance Curves

BN34 EU Performance Curves

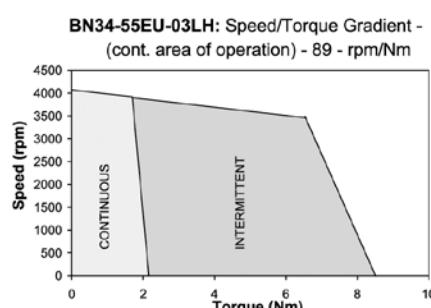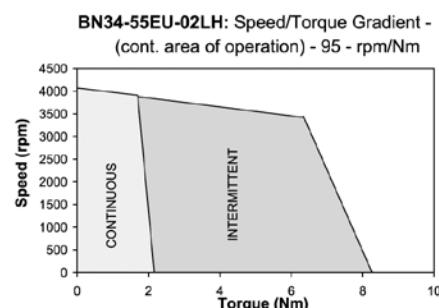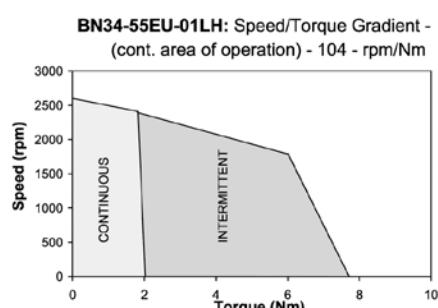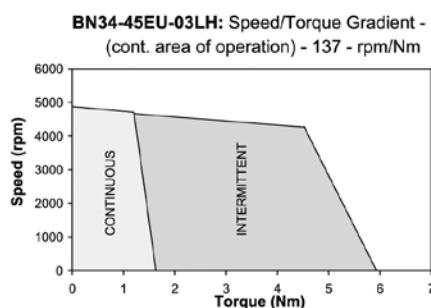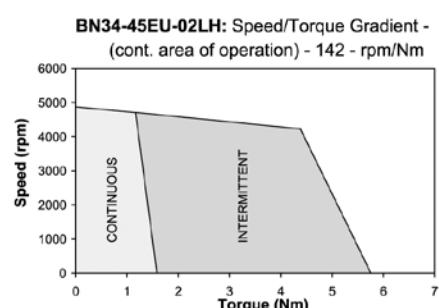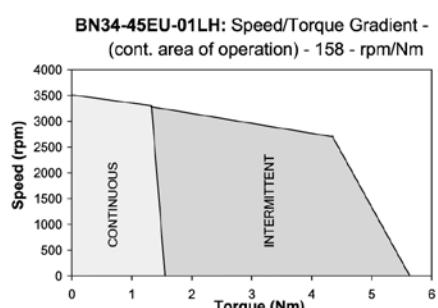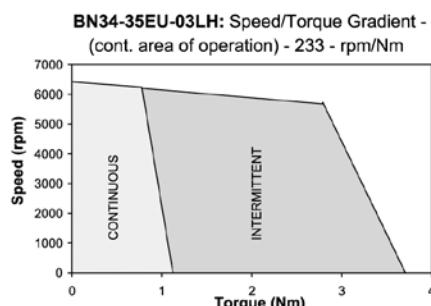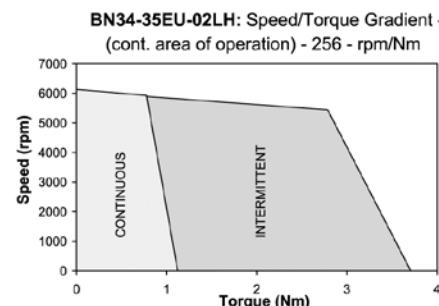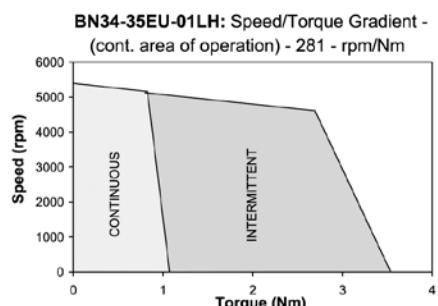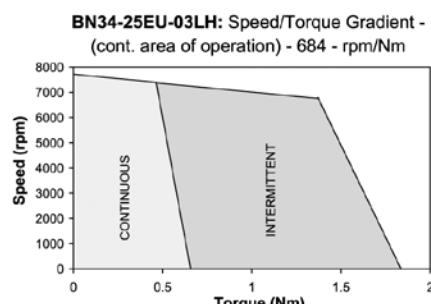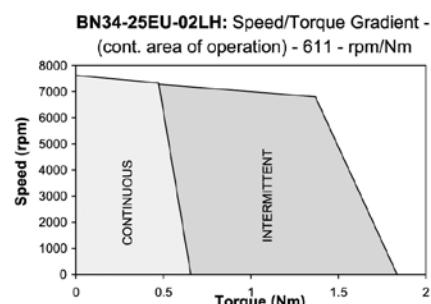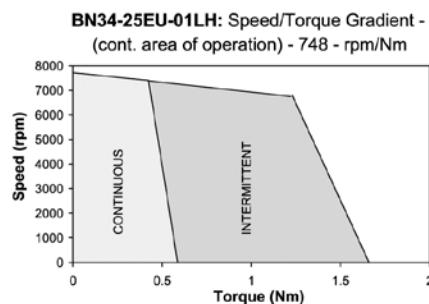

Note: Intermittent operation is based on a 20% duty cycle of one minute on, four minutes off.
Please contact the factory regarding the duty cycle of your application.

BN34 IP65 Specifications

BN34 IP65 SPECIFICATIONS - Continuous Stall Torque 83 - 309 oz-in (0.587 - 2.19 Nm)
 Peak Torque 326 - 1445 oz-in (2.31 - 10.21 Nm)

| Part Number* | BN34-25IP - <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> T <input type="checkbox"/> <input type="checkbox"/> | | | BN34-35IP - <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> F <input type="checkbox"/> <input type="checkbox"/> | | | BN34-45IP - <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> T <input checked="" type="checkbox"/> F <input type="checkbox"/> | | | BN34-55IP - <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> T <input checked="" type="checkbox"/> F <input type="checkbox"/> | | | |
|--------------------------|---|--------|-------|---|--------|--------|---|-------|-------|---|-------|-------|-------|
| Winding Code** | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 | |
| L = Length | inches | | 2.5 | 3.5 | | | 4.5 | | | 5.5 | | | |
| | millimeters | | 63.5 | 88.9 | | | 114.3 | | | 139.7 | | | |
| Terminal Voltage | volts DC | 24 | 50 | 100 | 24 | 50 | 100 | 24 | 50 | 100 | 24 | 50 | 100 |
| Peak Torque | oz-in | 310 | 310 | 310 | 657 | 643 | 657 | 1006 | 1006 | 1006 | 1375 | 1375 | 1375 |
| | Nm | 2.19 | 2.19 | 2.19 | 4.64 | 4.5405 | 4.64 | 7.11 | 7.11 | 7.11 | 9.71 | 9.71 | 9.71 |
| Continuous Stall Torque | oz-in | 88 | 93 | 90 | 140 | 162 | 172 | 210 | 220 | 236 | 249 | 288 | 299 |
| | Nm | 0.62 | 0.66 | 0.64 | 0.99 | 1.144 | 1.21 | 1.49 | 1.55 | 1.67 | 1.76 | 2.03 | 2.11 |
| Rated Speed | RPM | 8130 | 7500 | 7280 | 6010 | 6400 | 6380 | 3800 | 5170 | 5270 | 2750 | 4350 | 4360 |
| | rad/sec | 851 | 785 | 762 | 629 | 670 | 667 | 397 | 541 | 552 | 288 | 455 | 456 |
| Rated Torque | oz-in | 60 | 64 | 62 | 93 | 106 | 110 | 172 | 148 | 170 | 214 | 208 | 214 |
| | Nm | 0.4237 | 0.45 | 0.44 | 0.6567 | 0.749 | 0.78 | 1.24 | 1.05 | 1.2005 | 1.51 | 1.49 | 1.51 |
| Rated Current | Amps | 16.98 | 8 | 3.77 | 18.74 | 11 | 5.8 | 23.1 | 12.6 | 7 | 21.16 | 14.85 | 7.63 |
| Rated Power | watts | 361 | 355 | 334 | 417 | 502 | 519 | 483 | 567 | 612 | 435 | 669 | 690 |
| Torque Sensitivity | oz-in/amp | 3.78 | 8.5 | 17.48 | 5.06 | 9.92 | 20.26 | 7.76 | 12.42 | 26.39 | 10.5 | 14.7 | 29.39 |
| | Nm/amp | 0.027 | 0.06 | 0.123 | 0.036 | 0.0701 | 0.142 | 0.055 | 0.088 | 0.186 | 0.074 | 0.104 | 0.208 |
| Back EMF | volts/KRPM | 2.79 | 6.29 | 12.92 | 3.74 | 7.34 | 14.98 | 5.74 | 9.18 | 19.51 | 7.76 | 10.87 | 21.73 |
| | volts/rad/sec | 0.027 | 0.06 | 0.123 | 0.036 | 0.07 | 0.143 | 0.055 | 0.088 | 0.186 | 0.074 | 0.104 | 0.208 |
| Terminal Resistance | ohms | 0.079 | 0.253 | 1.12 | 0.05 | 0.147 | 0.548 | 0.068 | 0.141 | 0.557 | 0.088 | 0.131 | 0.487 |
| Terminal Inductance | mH | 0.12 | 0.62 | 2.62 | 0.1 | 0.43 | 1.72 | 0.17 | 0.43 | 1.94 | 0.23 | 0.44 | 1.78 |
| Motor Constant | oz-in/sq.rt.watt | 13.44 | 16.11 | 16.51 | 22.63 | 25.87 | 27.37 | 29.75 | 33.06 | 35.36 | 35.4 | 40.61 | 42.11 |
| | Nm/sq.rt.watt | 0.11 | 0.11 | 0.12 | 0.16 | 0.183 | 0.19 | 0.22 | 0.23 | 0.25 | 0.25 | 0.29 | 0.3 |
| Rotor Inertia | oz-in-sec ² x 10 ⁻³ | 7.2 | 7.2 | 7.2 | 14.1 | 12 | 14 | 21 | 21 | 21 | 28 | 28 | 28 |
| | g-cm ² | 510 | 510 | 510 | 1000 | 846.8 | 1000 | 1500 | 1500 | 1500 | 2000 | 2000 | 2000 |
| Weight | oz | 36 | 37 | 36 | 62 | 62 | 62 | 87 | 89 | 89 | 114 | 116 | 116 |
| | g | 1020 | 1030 | 1030 | 1750 | 1760.8 | 1770 | 2480 | 2520 | 2530 | 3230 | 3300 | 3.3 |
| # of Poles | | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| Timing | | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° |
| Mech. Time Constant | ms | 3.87 | 3.58 | 3.75 | 3.96 | 2.5 | 2.7 | 3.38 | 2.75 | 2.41 | 3.2 | 2.43 | 2.26 |
| Electrical Time Constant | ms | 2.27 | 2.45 | 2.34 | 2.14 | 2.9 | 3.15 | 2.48 | 3.04 | 3.48 | 2.58 | 3.4 | 3.66 |
| Thermal Resistivity | deg. C/watt | 2.25 | 2.39 | 2.41 | 1.87 | 1.84 | 1.84 | 1.51 | 1.63 | 1.62 | 1.45 | 1.43 | 1.43 |
| Speed/Torque Gradient | rpm/oz-in | 5.3 | 4.3 | 4.3 | 2.8 | 2.8 | 1.8 | 1.1 | 1 | 1 | 0.8 | 0.7 | 0.6 |

Notes:

1. Motor mounted to a 10 x 10 x 1/4 inches aluminum plate, still air.
 2. Maximum winding temperature of 155°C.
 3. Typical electrical specifications at 25°C.
 4. Motor Terminal Voltages are representative only; motors may be operated at voltages other than those listed in the table. For assistance please contact our applications engineer.
 5. Calculated (theoretical) speed/torque gradient.
 6. For MS (military style) connector, please specify connector housing and terminal.
 7. Data for informational purposes only. Should not be considered a binding performance agreement.
- For specific applications, please contact the factory.

*Many other custom mechanical options are available – consult factory.

**Many other winding options are available – consult factory.

Select your options below and place their code in its corresponding block as shown on page 5.

T TERMINATION

- L – Leads (std)
 C – Connector
 M – MS connector


F FEEDBACK OPTIONS

- H – Hall Effect (std)
 R – Resolver
 S – Sensorless

OTHER OPTIONS

- E – Encoder
 G – Gearhead

BN34 IP65 Typical Outline

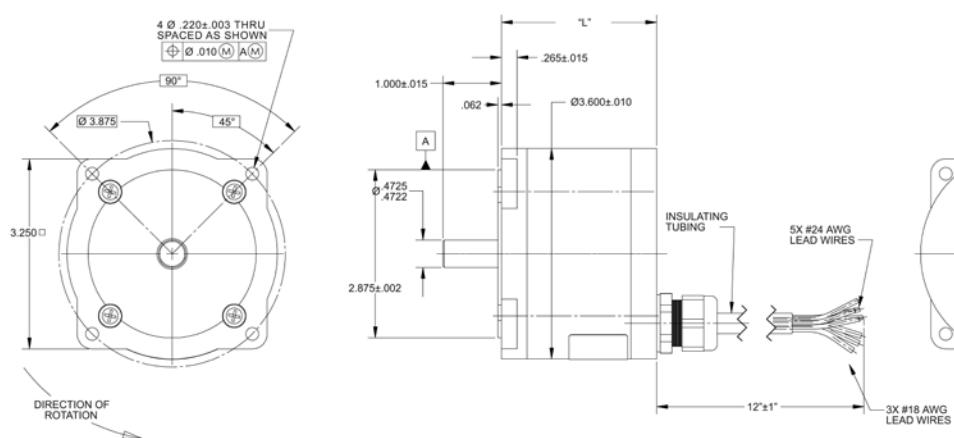

Termination Table













| PIN COLOR | CONNECTION |
|-----------|-----------------|
| YELLOW | V _{CC} |
| GRAY | GND |
| RED | A COIL |
| BLACK | B COIL |
| GREEN | C COIL |
| BLUE | S2 OUT |
| BROWN | S1 OUT |
| ORANGE | S3 OUT |

Dimensions are in inches

BN34 IP65 Performance Curves

BN34 IP65 Performance Curves

Businesses
Motors

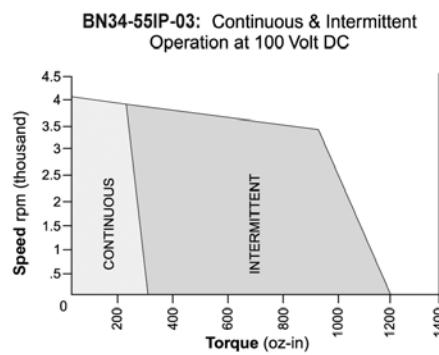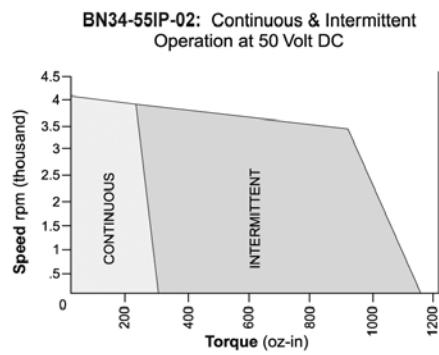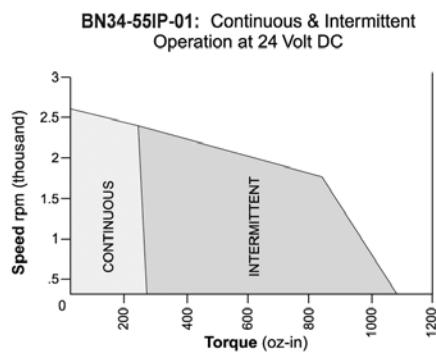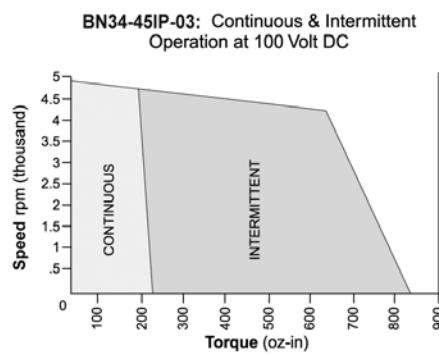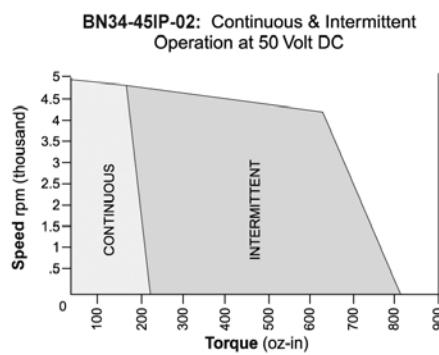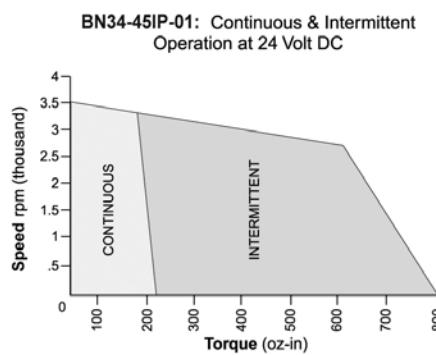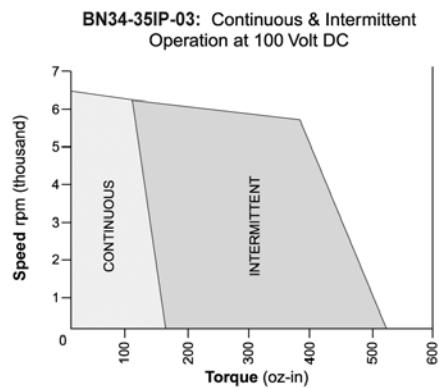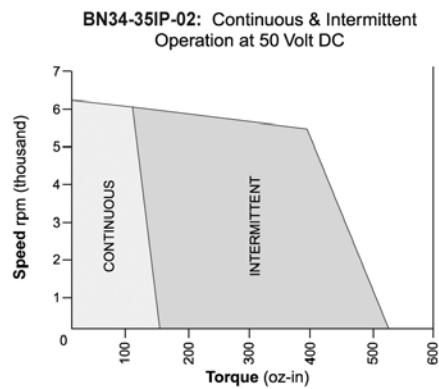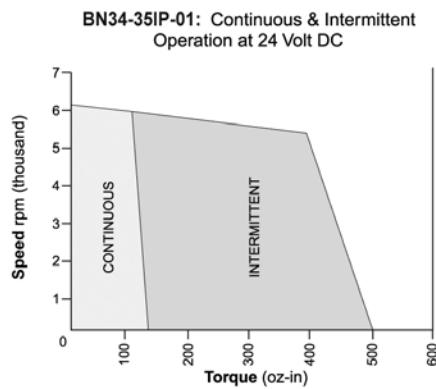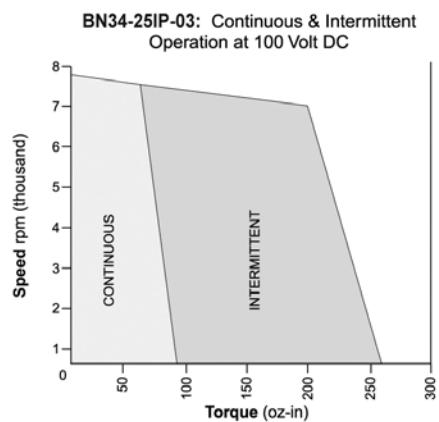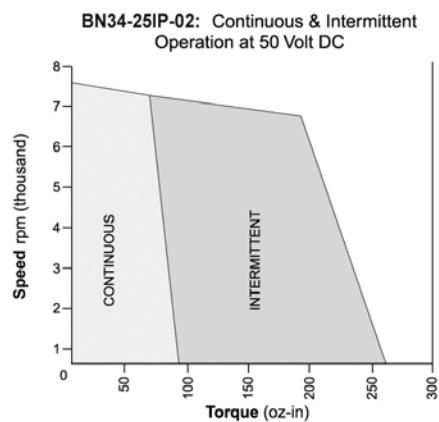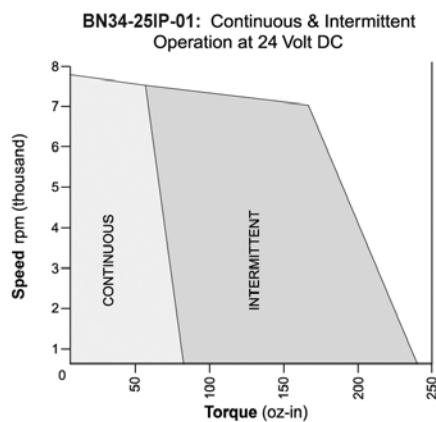

Note: Intermittent operation is based on a 20% duty cycle of one minute on, four minutes off.
Please contact the factory regarding the duty cycle of your application.

BN42 Specifications

BN42 SPECIFICATIONS -

*Continuous Stall Torque 144 - 519 oz-in (1.02 - 3.67 Nm)
Peak Torque 609 - 2560 oz-in (4.30 - 18.1 Nm)*

| Part Number* | BN42-23AF- <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> T <input checked="" type="checkbox"/> F <input type="checkbox"/> | | | BN42-33AF- <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> T <input checked="" type="checkbox"/> F <input type="checkbox"/> | | | BN42-43AF- <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> T <input checked="" type="checkbox"/> F <input type="checkbox"/> | | | BN42-53AF- <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> T <input checked="" type="checkbox"/> F <input type="checkbox"/> | | | |
|--------------------------|---|---------|---------|---|---------|---------|---|---------|---------|---|---------|---------|---------|
| Winding Code** | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 | |
| L = Length inches | 2.30 | | 3.30 | | 4.30 | | 5.30 | | 134.6 | | 134.6 | | |
| | 58.4 | | 83.8 | | 109.2 | | 134.6 | | 134.6 | | 134.6 | | |
| Terminal Voltage | volts DC | 24.0 | 50.0 | 100.0 | 24.0 | 50.0 | 100.0 | 24.0 | 50.0 | 100.0 | 24.0 | 50.0 | 100.0 |
| Peak Torque | oz-in | 609.0 | 609.0 | 609.0 | 1248.0 | 1248.0 | 1248.0 | 1906.0 | 1906.0 | 1906.0 | 2560.0 | 2560.0 | 2560.0 |
| | Nm | 4.3005 | 4.3005 | 4.3005 | 8.8128 | 8.8128 | 8.8128 | 13.4592 | 13.4592 | 13.4592 | 18.0774 | 18.0774 | 18.0774 |
| Continuous Stall Torque | oz-in | 144.0 | 156.0 | 155.0 | 266.0 | 281.0 | 287.0 | 387.0 | 398.0 | 407.0 | 496.0 | 510.0 | 519.0 |
| | Nm | 1.0169 | 1.1016 | 1.0945 | 1.8784 | 1.9843 | 2.0267 | 2.7328 | 2.8105 | 2.8740 | 3.5025 | 3.6014 | 3.6649 |
| Rated Speed | RPM | 6050.0 | 5950.0 | 6140.0 | 3710.0 | 4710.0 | 4710.0 | 2380.0 | 3840.0 | 3840.0 | 1740.0 | 2820.0 | 2820.0 |
| | rad/sec | 634 | 623 | 643 | 389 | 493 | 493 | 249 | 402 | 402 | 182 | 295 | 295 |
| Rated Torque | oz-in | 102.0 | 113.0 | 110.0 | 213.0 | 198.0 | 200.0 | 340.0 | 290.0 | 296.0 | 451.0 | 413.0 | 419.0 |
| | Nm | 0.7203 | 0.7979 | 0.7768 | 1.5041 | 1.3982 | 1.4123 | 2.4009 | 2.0478 | 2.0902 | 3.1847 | 2.9164 | 2.9588 |
| Rated Current | Amps | 22.60 | 11.70 | 5.90 | 28.90 | 16.20 | 8.20 | 29.70 | 19.20 | 9.80 | 29.20 | 20.20 | 10.20 |
| Rated Power | watts | 456.0 | 497.0 | 499.0 | 584.0 | 690.0 | 697.0 | 598.0 | 824.0 | 841.0 | 580.0 | 861.0 | 874.0 |
| Torque Sensitivity | oz-in/amp | 5.20 | 11.00 | 21.40 | 8.41 | 14.00 | 28.00 | 12.90 | 17.20 | 34.30 | 17.40 | 23.10 | 46.30 |
| | Nm/amp | 0.0367 | 0.0777 | 0.1511 | 0.0594 | 0.0989 | 0.1977 | 0.0911 | 0.1215 | 0.2422 | 0.1229 | 0.1631 | 0.3269 |
| Back EMF | volts/KRPM | 3.80 | 8.20 | 15.80 | 6.22 | 10.40 | 20.70 | 9.52 | 12.70 | 25.40 | 12.80 | 17.10 | 34.20 |
| | volts/rad/sec | 0.0367 | 0.0777 | 0.1511 | 0.0594 | 0.0989 | 0.1977 | 0.0911 | 0.1215 | 0.2422 | 0.1229 | 0.1631 | 0.3269 |
| Terminal Resistance | ohms | 0.040 | 0.154 | 0.584 | 0.039 | 0.095 | 0.364 | 0.052 | 0.084 | 0.320 | 0.065 | 0.106 | 0.408 |
| Terminal Inductance | mH | 0.090 | 0.408 | 1.540 | 0.115 | 0.318 | 1.270 | 0.178 | 0.316 | 1.260 | 0.241 | 0.428 | 1.710 |
| Motor Constant | oz-in/sq.rt.watt | 26.00 | 28.03 | 28.00 | 42.59 | 45.42 | 46.41 | 56.57 | 59.35 | 60.63 | 68.25 | 70.95 | 72.49 |
| | Nm/sq.rt.watt | 0.18360 | 0.19794 | 0.19775 | 0.30072 | 0.32075 | 0.32772 | 0.39947 | 0.41907 | 0.42817 | 0.48194 | 0.50102 | 0.51186 |
| Rotor Inertia | oz-in-sec ² ×10 ³ | 18.00 | 18.00 | 18.00 | 35.00 | 35.00 | 35.00 | 52.00 | 52.00 | 52.00 | 70.00 | 70.00 | 70.00 |
| | g-cm ² | 1270.3 | 1270.3 | 1270.3 | 2470.0 | 2470.0 | 2470.0 | 3669.6 | 3669.6 | 3669.6 | 4939.9 | 4939.9 | 4939.9 |
| Weight | oz | 65.0 | 65.0 | 65.0 | 104.0 | 104.0 | 104.0 | 143.0 | 143.0 | 143.0 | 182.0 | 182.0 | 182.0 |
| | g | 1846.0 | 1846.0 | 1846.0 | 2953.6 | 2953.6 | 2953.6 | 4061.2 | 4061.2 | 4061.2 | 5168.8 | 5168.8 | 5168.8 |
| # of Poles | | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 |
| Timing | | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° |
| Mech. Time Constant | ms | 3.8 | 3.2 | 3.2 | 2.7 | 2.4 | 2.3 | 2.3 | 2.1 | 2.0 | 2.1 | 2.0 | 1.9 |
| Electrical Time Constant | ms | 2.25 | 2.65 | 2.64 | 2.95 | 3.35 | 3.49 | 3.42 | 3.76 | 3.94 | 3.71 | 4.04 | 4.19 |
| Thermal Resistivity | deg. C/watt | 1.2 | 1.2 | 1.2 | 1.0 | 0.9 | 0.9 | 0.9 | 0.8 | 0.8 | 0.9 | 0.7 | 0.7 |
| Speed/Torque Gradient | rpm/oz-in | 2.0 | 1.7 | 1.7 | 0.7 | 0.7 | 0.6 | 0.4 | 0.4 | 0.3 | 0.3 | 0.3 | 0.3 |

Notes:

1. Motor mounted to a 10 x 10 x 1/4 inches aluminum plate, still air.
2. Maximum winding temperature of 155°C.
3. Typical electrical specifications at 25°C.
4. Motor Terminal Voltages are representative only; motors may be operated at voltages other than those listed in the table. For assistance please contact our applications engineer.
5. For MS (military style) connector, please specify connector housing and terminal.
6. Data for informational purposes only. Should not be considered a binding performance agreement. For specific applications, please contact the factory.



*Many other custom mechanical options are available – consult factory.

**Many other winding options are available – consult factory.

Select your options below and place their code in its corresponding block as shown on page 5.

| T TERMINATION | F FEEDBACK OPTIONS | O OTHER OPTIONS |
|------------------|-----------------------|-----------------|
| L – Leads (std) | H – Hall Effect (std) | E – Encoder |
| C – Connector | R – Resolver | G – Gearhead |
| M – MS connector | S – Sensorless | |

BN42 Typical Outline

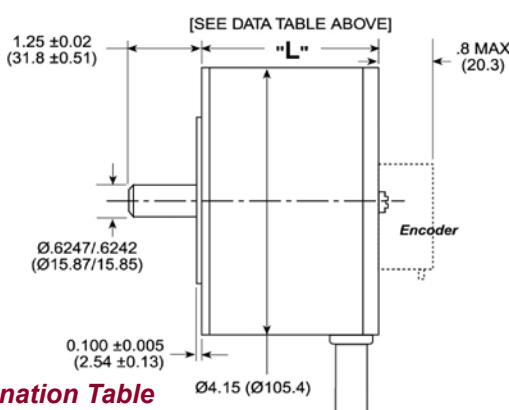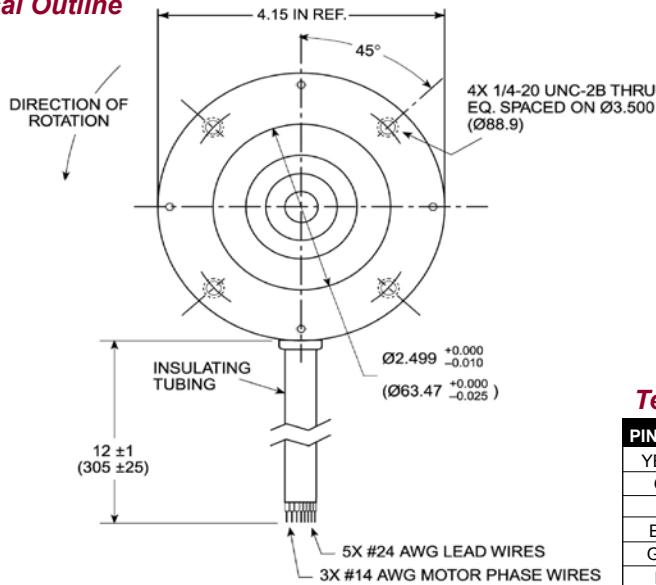

Termination Table

| PIN COLOR | CONNECTION |
|-----------|-----------------|
| YELLOW | V _{cc} |
| GRAY | GROUND |
| RED | A COIL |
| BLACK | B COIL |
| GREEN | C COIL |
| BLUE | S2 OUT |
| BROWN | S1 OUT |
| ORANGE | S3 OUT |


Dimensions are in inches (millimeters)

Note: An optional 4.15 (105.4) square front end cap is available.

REVISED 05/19

BN42 Performance Curves

BN42 Performance Curves

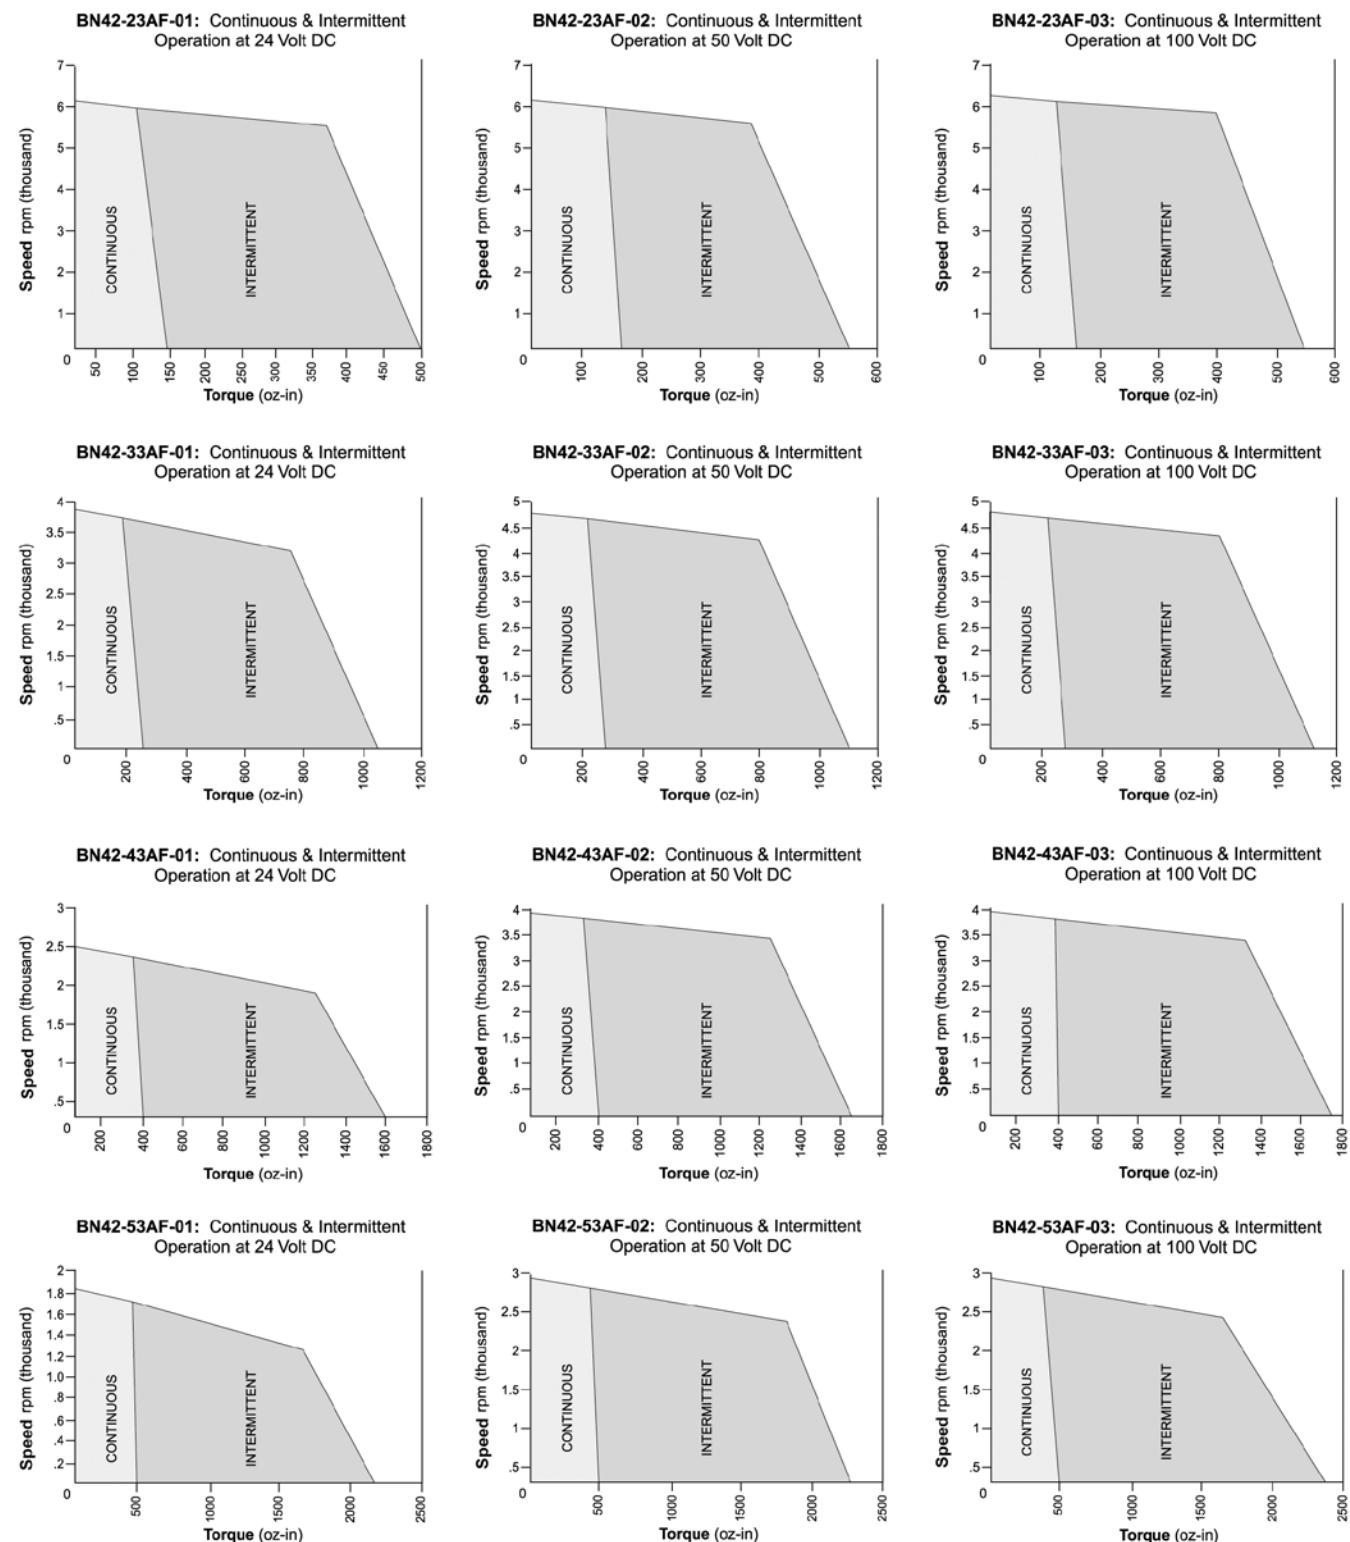

Note: Intermittent operation is based on a 20% duty cycle of one minute on, four minutes off.
Please contact the factory regarding the duty cycle of your application.

BN42 EU Specifications

BN42 EU SPECIFICATIONS -

*Continuous Stall Torque 144 - 519 oz-in (1.02 - 3.67 Nm)
Peak Torque 609 - 2560 oz-in (4.30 - 18.1 Nm)*

| Part Number* | BN42-23EU- | | | BN42-33EU- | | | BN42-43EU- | | | BN42-53EU- | | | |
|-------------------------|------------------------|--------|--------|------------|--------|--------|------------|--------|-------|------------|-------|-------|-------|
| Winding Code** | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 | |
| L = Length | inches | | 2.30 | | 3.30 | | 4.30 | | 5.30 | | | | |
| | millimeters | | 58.5 | | 83.9 | | 109.3 | | 134.7 | | | | |
| Terminal Voltage | volts DC | 24 | 50 | 100 | 24 | 50 | 100 | 24 | 50 | 100 | 24 | 50 | 100 |
| Peak Torque | oz-in | 609 | 609 | 609 | 1248 | 1248 | 1248 | 1906 | 1906 | 1906 | 2560 | 2560 | 2560 |
| | Nm | 4.30 | 4.30 | 4.30 | 8.82 | 8.82 | 8.82 | 13.5 | 13.5 | 13.5 | 18.1 | 18.1 | 18.1 |
| Continuous Stall Torque | oz-in | 144 | 156 | 155 | 266 | 281 | 287 | 387 | 398 | 407 | 496 | 510 | 519 |
| | Nm | 1.02 | 1.11 | 1.10 | 1.88 | 1.99 | 2.03 | 2.74 | 2.81 | 2.88 | 3.51 | 3.61 | 3.67 |
| Rated Speed | RPM | 6050 | 5950 | 6140 | 3710 | 4710 | 4710 | 2380 | 3840 | 3840 | 1740 | 2820 | 2820 |
| | rad/sec | 634 | 623 | 643 | 389 | 494 | 494 | 250 | 403 | 403 | 183 | 296 | 296 |
| Rated Torque | oz-in | 102 | 113 | 110 | 213 | 198 | 200 | 340 | 290 | 296 | 451 | 413 | 419 |
| | Nm | 0.721 | 0.798 | 0.777 | 1.51 | 1.40 | 1.42 | 2.41 | 2.05 | 2.09 | 3.19 | 2.92 | 2.96 |
| Rated Current | Amps | 22.6 | 11.7 | 5.9 | 28.9 | 16.2 | 8.2 | 29.7 | 19.2 | 9.8 | 29.2 | 20.2 | 10.2 |
| Rated Power | watts | 456 | 497 | 499 | 584 | 690 | 697 | 598 | 824 | 841 | 580 | 861 | 874 |
| Torque Sensitivity | oz-in/amp | 5.20 | 11.0 | 21.4 | 8.41 | 14.0 | 28.0 | 12.9 | 17.2 | 34.3 | 17.4 | 23.1 | 46.3 |
| | Nm/amp | 0.0363 | 0.0783 | 0.151 | 0.0594 | 0.0992 | 0.198 | 0.0909 | 0.122 | 0.243 | 0.123 | 0.164 | 0.327 |
| Back EMF | volts/KRPM | 3.80 | 8.20 | 15.8 | 6.22 | 10.4 | 20.7 | 9.52 | 12.7 | 25.4 | 12.8 | 17.1 | 34.2 |
| | volts/rad/sec | 0.0363 | 0.0783 | 0.151 | 0.0594 | 0.0992 | 0.198 | 0.0909 | 0.122 | 0.243 | 0.123 | 0.164 | 0.327 |
| Terminal Resistance | ohms | 0.040 | 0.154 | 0.584 | 0.039 | 0.095 | 0.364 | 0.052 | 0.084 | 0.320 | 0.065 | 0.106 | 0.408 |
| Terminal Inductance | mH | 0.090 | 0.408 | 1.54 | 0.115 | 0.318 | 1.27 | 0.178 | 0.316 | 1.26 | 0.241 | 0.428 | 1.71 |
| Motor Constant | oz-in/sq.rt.watt | 27.8 | 28.6 | 28.2 | 45.7 | 46.8 | 46.8 | 59.5 | 61.2 | 61.1 | 71.0 | 73.0 | 72.9 |
| | Nm/sq.rt.watt | 0.197 | 0.202 | 0.199 | 0.323 | 0.331 | 0.331 | 0.421 | 0.433 | 0.432 | 0.502 | 0.516 | 0.515 |
| Rotor Inertia | oz-in-sec ² | 0.018 | 0.018 | 0.018 | 0.035 | 0.035 | 0.035 | 0.052 | 0.052 | 0.052 | 0.070 | 0.070 | 0.070 |
| | g-cm ² | 1271 | 1271 | 1271 | 2472 | 2472 | 2472 | 3672 | 3672 | 3672 | 4943 | 4943 | 4943 |
| Weight | oz | 65 | 65 | 65 | 104 | 104 | 104 | 143 | 143 | 143 | 182 | 182 | 182 |
| | g | 1843 | 1843 | 1843 | 2949 | 2949 | 2949 | 4054 | 4054 | 4054 | 5160 | 5160 | 5160 |

Notes:

1. Motor mounted to a 10 x 10 x 1/4 inches aluminum plate, still air.
2. Maximum winding temperature of 155°C.
3. Typical electrical specifications at 25°C.
4. Motor Terminal Voltages are representative only; motors may be operated at voltages other than those listed in the table. For assistance please contact our applications engineer.
5. For MS (military style) connector, please specify connector housing and terminal.
6. Data for informational purposes only. Should not be considered a binding performance agreement. For specific applications, please contact the factory.

*Many other custom mechanical options are available – consult factory.

**Many other winding options are available – consult factory.

Select your options below and place their code in its corresponding block as shown on page 5.

T TERMINATION

L – Leads (std)

C – Connector

M – MS connector

F FEEDBACK OPTIONS

H – Hall Effect (std)

R – Resolver


S – Sensorless

OTHER OPTIONS

E – Encoder

G – Gearhead

BN42 EU Typical Outline

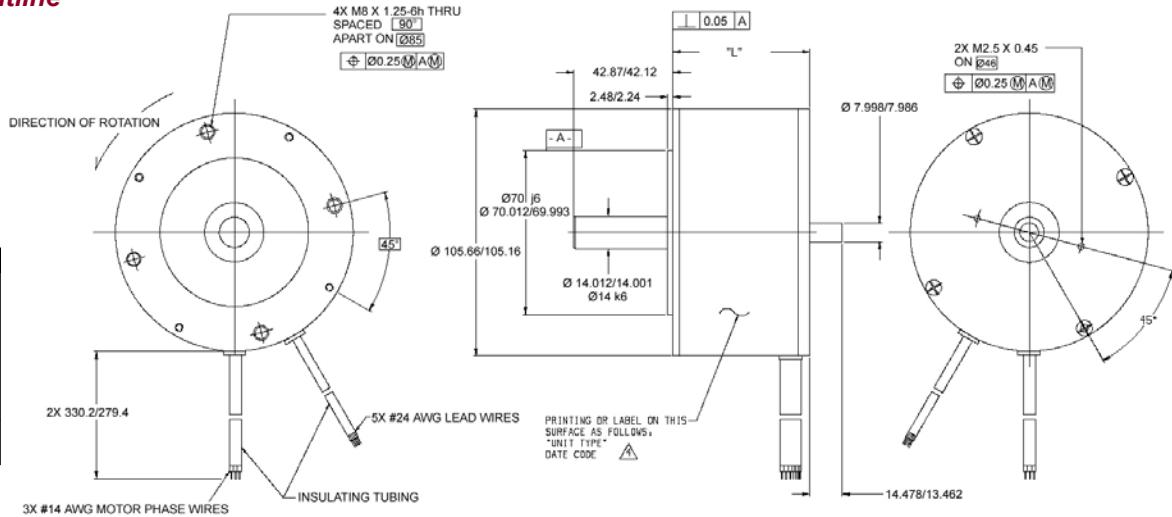













Dimensions are in inches

Termination Table

| PIN COLOR | CONNECTION |
|-----------|-----------------|
| YELLOW | V _{CC} |
| GRAY | GROUND |
| RED | A COIL |
| BLACK | B COIL |
| GREEN | C COIL |
| BLUE | S2 OUT |
| BROWN | S1 OUT |
| ORANGE | S3 OUT |

BN42 EU Performance Curves

BN42 EU Performance Curves

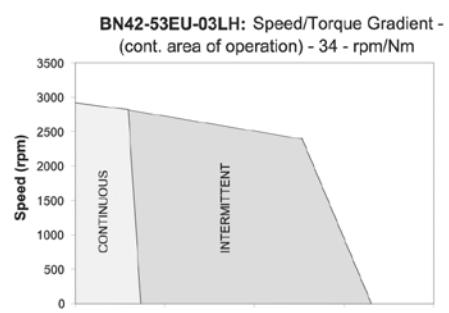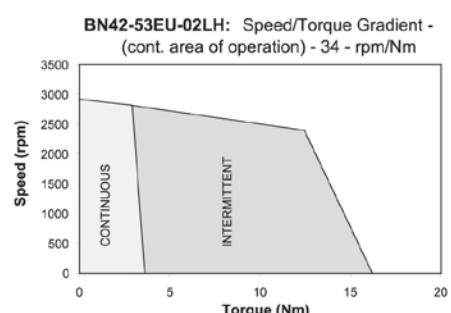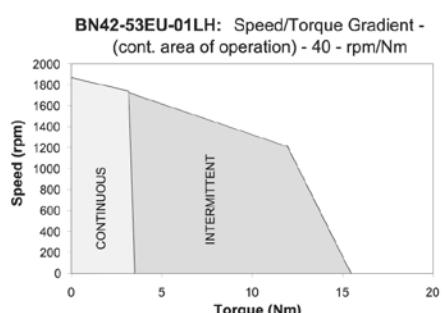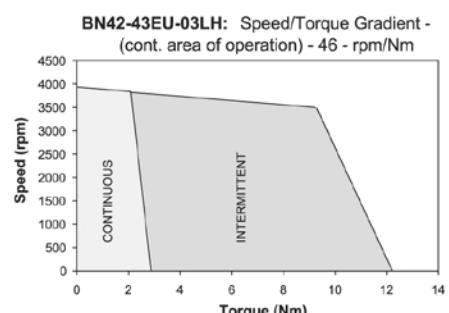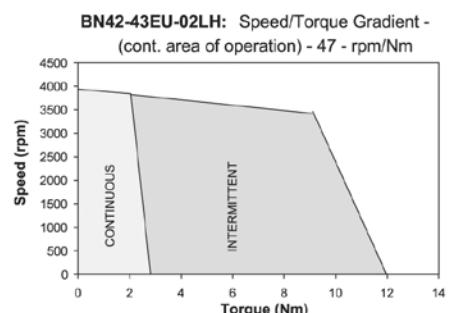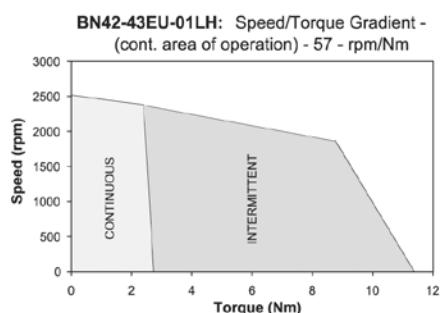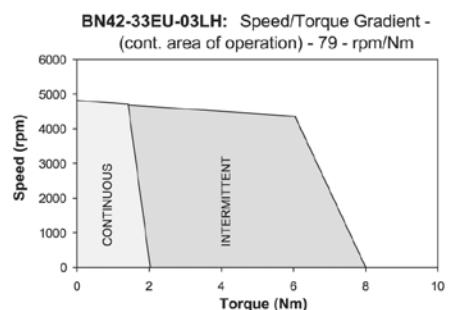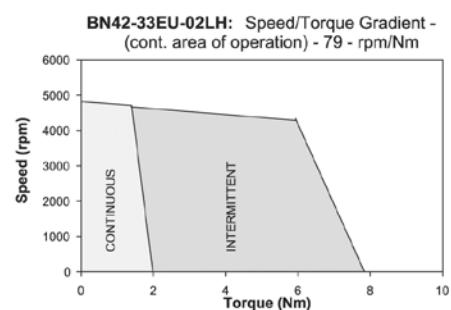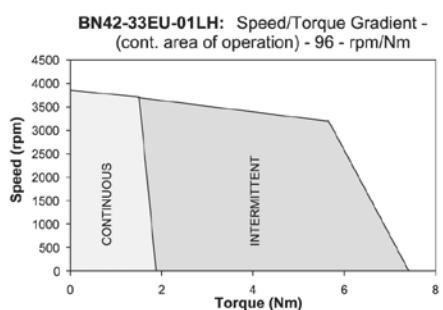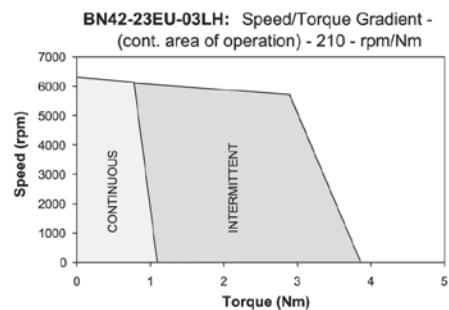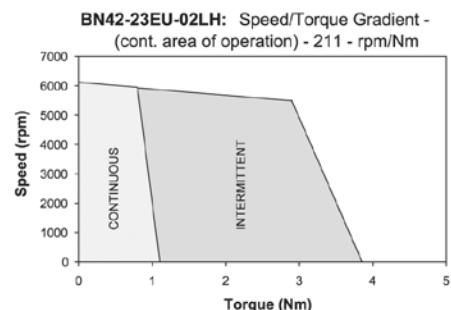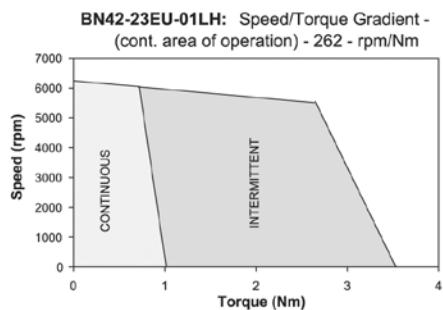

Note: Intermittent operation is based on a 20% duty cycle of one minute on, four minutes off.
Please contact the factory regarding the duty cycle of your application.

BN42 IP65 Specifications

BN42 IP65 SPECIFICATIONS - Continuous Stall Torque 144 - 519 oz-in (1.02 - 3.67 Nm)
Peak Torque 609 - 2560 oz-in (4.30 - 18.1 Nm)

| Part Number* | BN42-23IP - <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> | | | BN42-33IP - <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> | | | BN42-43IP - <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> | | | BN42-53IP - <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> | | | |
|--------------------------|---|---------|---------|--|---------|---------|---|---------|---------|--|---------|---------|---------|
| Winding Code** | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 | 01 | 02 | 03 | |
| L = Length | inches | | 2.30 | | 3.30 | | 4.30 | | 5.30 | | | | |
| | millimeters | | 58.4 | | 83.8 | | 109.2 | | 134.6 | | | | |
| Terminal Voltage | volts DC | 24.0 | 50.0 | 100.0 | 24.0 | 50.0 | 100.0 | 24.0 | 50.0 | 100.0 | 24.0 | 50.0 | 100.0 |
| Peak Torque | oz-in | 609.0 | 609.0 | 609.0 | 1248.0 | 1248.0 | 1248.0 | 1906.0 | 1906.0 | 1906.0 | 2560.0 | 2560.0 | 2560.0 |
| | Nm | 4.3005 | 4.3005 | 4.3005 | 8.8128 | 8.8128 | 8.8128 | 13.4592 | 13.4592 | 13.4592 | 18.0774 | 18.0774 | 18.0774 |
| Continuous Stall Torque | oz-in | 144.0 | 156.0 | 155.0 | 266.0 | 281.0 | 287.0 | 387.0 | 398.0 | 407.0 | 496.0 | 510.0 | 519.0 |
| | Nm | 1.0169 | 1.1016 | 1.0945 | 1.8784 | 1.9843 | 2.0267 | 2.7328 | 2.8105 | 2.8740 | 3.5025 | 3.6014 | 3.6649 |
| Rated Speed | RPM | 6050.0 | 5950.0 | 6140.0 | 3710.0 | 4710.0 | 4710.0 | 2380.0 | 3840.0 | 3840.0 | 1740.0 | 2820.0 | 2820.0 |
| | rad/sec | 634 | 623 | 643 | 389 | 493 | 493 | 249 | 402 | 402 | 182 | 295 | 295 |
| Rated Torque | oz-in | 102.0 | 113.0 | 110.0 | 213.0 | 198.0 | 200.0 | 340.0 | 290.0 | 296.0 | 451.0 | 413.0 | 419.0 |
| | Nm | 0.7203 | 0.7979 | 0.7768 | 1.5041 | 1.3982 | 1.4123 | 2.4009 | 2.0478 | 2.0902 | 3.1847 | 2.9164 | 2.9588 |
| Rated Current | Amps | 22.60 | 11.70 | 5.90 | 28.90 | 16.20 | 8.20 | 29.70 | 19.20 | 9.80 | 29.20 | 20.20 | 10.20 |
| Rated Power | watts | 456.0 | 497.0 | 499.0 | 584.0 | 690.0 | 697.0 | 598.0 | 824.0 | 841.0 | 580.0 | 861.0 | 874.0 |
| Torque Sensitivity | oz-in/amp | 5.20 | 11.00 | 21.40 | 8.41 | 14.00 | 28.00 | 12.90 | 17.20 | 34.30 | 17.40 | 23.10 | 46.30 |
| | Nm/amp | 0.0367 | 0.0777 | 0.1511 | 0.0594 | 0.0989 | 0.1977 | 0.0911 | 0.1215 | 0.2422 | 0.1229 | 0.1631 | 0.3269 |
| Back EMF | volts/KRPM | 3.80 | 8.20 | 15.80 | 6.22 | 10.40 | 20.70 | 9.52 | 12.70 | 25.40 | 12.80 | 17.10 | 34.20 |
| | volts/rad/sec | 0.0367 | 0.0777 | 0.1511 | 0.0594 | 0.0989 | 0.1977 | 0.0911 | 0.1215 | 0.2422 | 0.1229 | 0.1631 | 0.3269 |
| Terminal Resistance | ohms | 0.040 | 0.154 | 0.584 | 0.039 | 0.095 | 0.364 | 0.052 | 0.084 | 0.320 | 0.065 | 0.106 | 0.408 |
| Terminal Inductance | mH | 0.090 | 0.408 | 1.540 | 0.115 | 0.318 | 1.270 | 0.178 | 0.316 | 1.260 | 0.241 | 0.428 | 1.710 |
| Motor Constant | oz-in/sq.rt.watt | 26.00 | 28.03 | 28.00 | 42.59 | 45.42 | 46.41 | 56.57 | 59.35 | 60.63 | 68.25 | 70.95 | 72.49 |
| | Nm/sq.rt.watt | 0.18360 | 0.19794 | 0.19775 | 0.30072 | 0.32075 | 0.32772 | 0.39947 | 0.41907 | 0.42817 | 0.48194 | 0.50102 | 0.51186 |
| Rotor Inertia | oz-in-sec ² x10 ⁻³ | 18.00 | 18.00 | 18.00 | 35.00 | 35.00 | 35.00 | 52.00 | 52.00 | 52.00 | 70.00 | 70.00 | 70.00 |
| | g-cm ² | 1270.3 | 1270.3 | 1270.3 | 2470.0 | 2470.0 | 2470.0 | 3669.6 | 3669.6 | 3669.6 | 4939.9 | 4939.9 | 4939.9 |
| Weight | oz | 65.0 | 65.0 | 65.0 | 104.0 | 104.0 | 104.0 | 143.0 | 143.0 | 143.0 | 182.0 | 182.0 | 182.0 |
| | g | 1846.0 | 1846.0 | 1846.0 | 2953.6 | 2953.6 | 2953.6 | 4061.2 | 4061.2 | 4061.2 | 5168.8 | 5168.8 | 5168.8 |
| # of Poles | | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 |
| Timing | | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° | 120° |
| Mech. Time Constant | ms | 3.8 | 3.2 | 3.2 | 2.7 | 2.4 | 2.3 | 2.3 | 2.1 | 2.0 | 2.1 | 2.0 | 1.9 |
| Electrical Time Constant | ms | 2.25 | 2.65 | 2.64 | 2.95 | 3.35 | 3.49 | 3.42 | 3.76 | 3.94 | 3.71 | 4.04 | 4.19 |
| Thermal Resistivity | deg. C/watt | 1.2 | 1.2 | 1.2 | 1.0 | 0.9 | 0.9 | 0.9 | 0.8 | 0.8 | 0.9 | 0.7 | 0.7 |
| Speed/Torque Gradient | rpm/oz-in | 2.0 | 1.7 | 1.7 | 0.7 | 0.7 | 0.6 | 0.4 | 0.4 | 0.4 | 0.3 | 0.3 | 0.3 |

Notes:

1. Motor mounted to a 10 x 10 x 1/4 inches aluminum plate, still air.
2. Maximum winding temperature of 155°C.
3. Typical electrical specifications at 25°C.
4. Motor Terminal Voltages are representative only; motors may be operated at voltages other than those listed in the table. For assistance please contact our applications engineer.
5. Calculated (theoretical) speed/torque gradient.
6. For MS (military style) connector, please specify connector housing and terminal.
7. Data for informational purposes only. Should not be considered a binding performance agreement. For specific applications, please contact the factory.


*Many other custom mechanical options are available – consult factory.

**Many other winding options are available – consult factory.

Select your options below and place their code in its corresponding block as shown on page 5.

| <input checked="" type="checkbox"/> TERMINATION | <input type="checkbox"/> FEEDBACK OPTIONS | <input type="checkbox"/> OTHER OPTIONS |
|---|---|--|
| L – Leads (std) | H – Hall Effect (std) | E – Encoder |
| C – Connector | R – Resolver | G – Gearhead |
| M – MS connector | S – Sensorless | |

BN42 IP65 Typical Outline

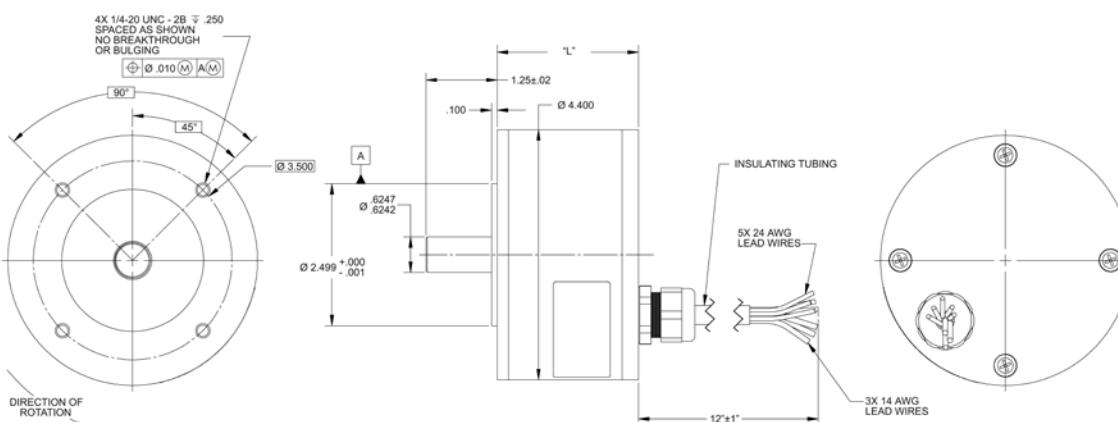

Termination Table


| PIN COLOR | CONNECTION |
|-----------|--------------------|
| YELLOW | V _{cc} |
| GRAY | GROUND |
| RED | A COIL |
| BLACK | B COIL |
| GREEN | C COIL |
| BLUE | S ₂ OUT |
| BROWN | S ₁ OUT |
| ORANGE | S ₃ OUT |

Dimensions are in inches

Note: An optional 4.15 (105.4) square front end cap is available.

BN42 IP65 Performance Curves

BN42 IP65 Performance Curves

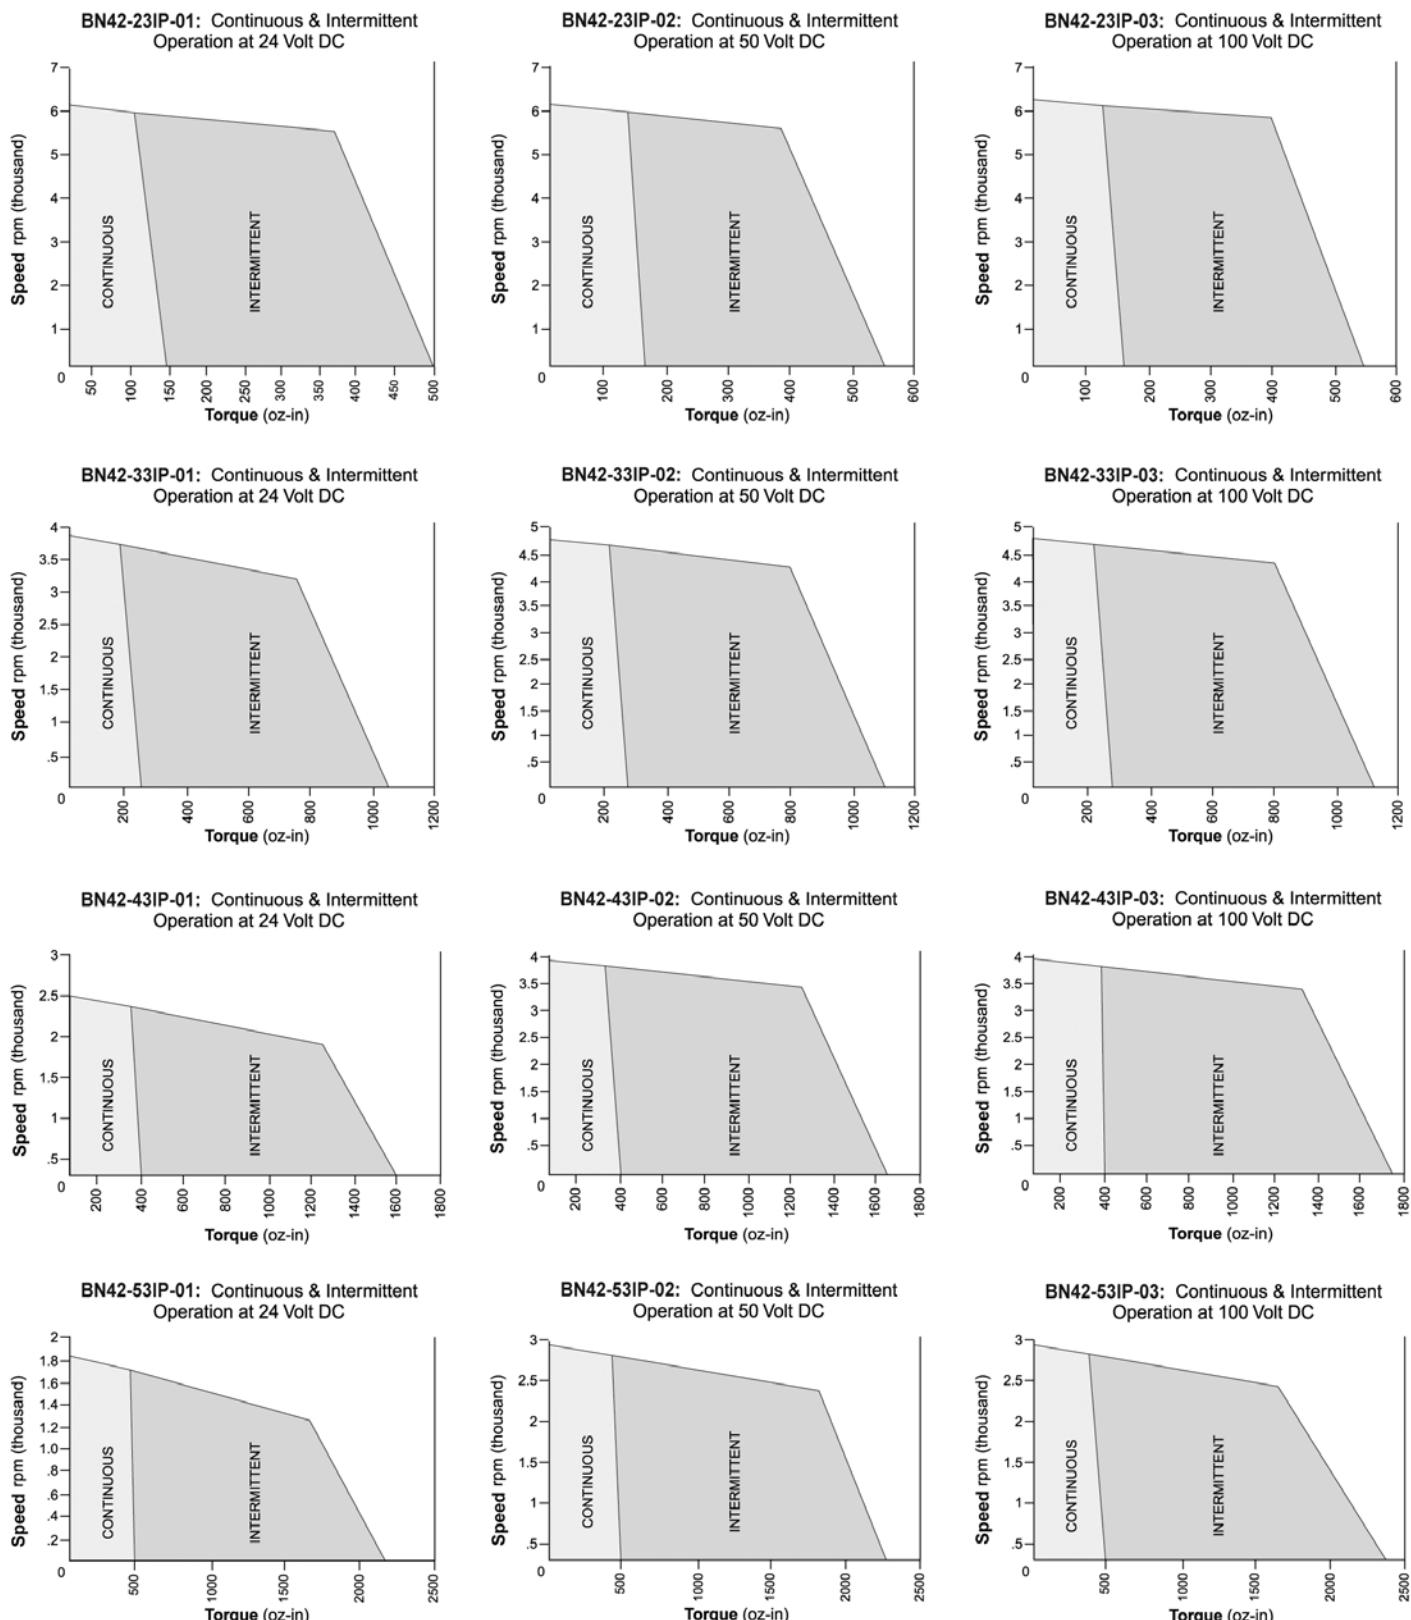

Note: Intermittent operation is based on a 20% duty cycle of one minute on, four minutes off.
Please contact the factory regarding the duty cycle of your application.